

VERSTML

CONDENSING FIRE-TUBE BOILER



**VERSA IC[®] INTELLIGENCE
WITH RAYMOTE[™] ACCESS**

**INSTANT VISIBILITY
OF BOILER STATUS**


**UP TO 98% EFFICIENCY,
MAXIMUM PERFORMANCE**

Raypak[®]
A Rheem[®] Company

NEW DESIGN WITH

Out with the cold, in with the new XVers L.

The XVers L, our newest hydronic boiler is built to automatically assess the temperature, and adjust to make sure your environment is controlled and comfortable. It's engineered for performance, efficiency and with Raymote access, it allows you to stay connected and informed anywhere you are. The XVers L is available in sizes from 399 to 850 MBTUH which expands our reliable XVers family of boilers. Feel secure with Raypak, and know that you're keeping your buildings, schools, multi-family housing, hospitals and gyms warm and energy efficient with the XVers L line of hydronic boilers.

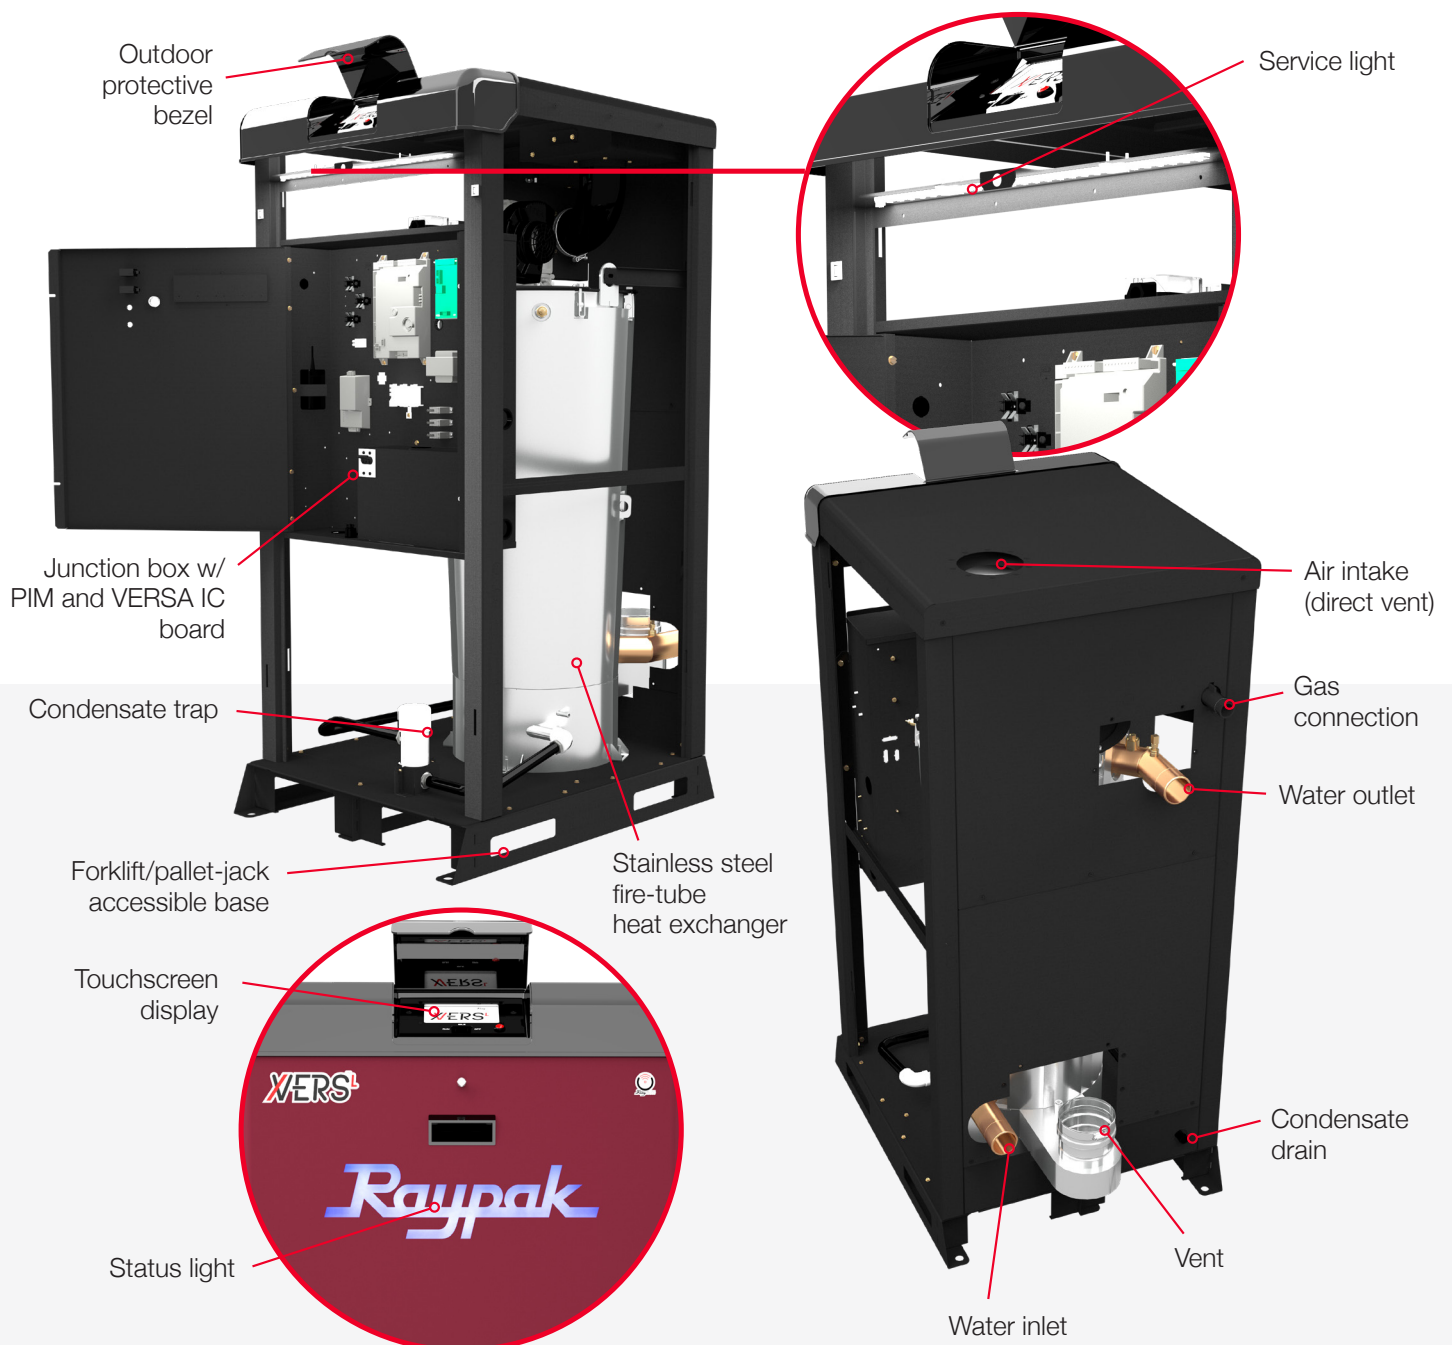


COMFORT IN MIND.

VERSA IC intelligence with *Ray*moTc™ connectivity.

Raypak's VERSA IC touchscreen enables modulating temperature control, safety limits, and ignition programming into one user-friendly integrated control platform. With self-learning features that prevent equipment damage, this automated controller is easy to set-up, understand, and use, making it as close to plug and play as possible.

The VERSA IC and boiler system can be remotely monitored through the Raymote mobile app or web dashboard. With touch-of-a-button access to vital information, Raymote gives you:

- Real time service notifications to keep you informed.
- View and manage your Raypak systems at multiple sites.
- Instant visibility to historical data and performance reports.

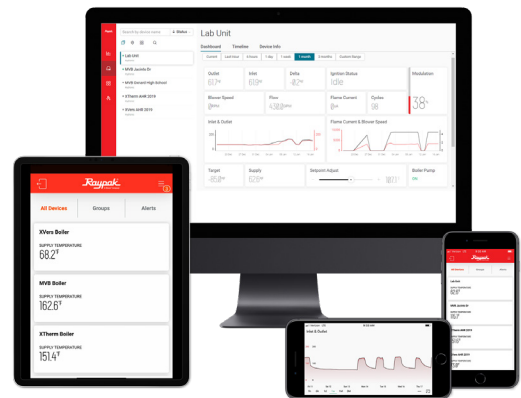

1 year of Raymote service included.



Instant Visibility

The multi-function status light not only lends to XVers L's new sleek design, but it aids in:

- Quick visual status of the boiler at a distance
- Service light for maintenance of the boiler

Illumination Key

- SOLID WHITE: POWER ON
- PULSING WHITE: GAS PURGE
- PULSING BLUE: CALL FOR HEAT
- SOLID BLUE: BURNER ON
- PULSING RED: ERROR



Maximum Performance

Each XVers L is ENERGY STAR certified. With 98% thermal efficiency* and up to 10:1 turndown. Up to 8 boilers can be cascaded in parallel or sequential modulation modes. Combine this with interstage delay settings and you will have precise control and optimization of your boiler system.



Flexibility

The XVers L can be installed as primary or primary/secondary piping. It can vent with PVC/CPVC, polypropylene or stainless steel. Because of its compact, streamlined design and zero side-clearance, you get more options, more flexibility and the ability to adjust to varying conditions.



Dependability

The built-in stainless steel heat exchanger is designed to resist corrosion and when working in conjunction with the VERSA IC and Raymote features, it maximizes performance, efficiency, increases protection and provides remote visibility of the boiler wherever you are. This translates to more uptime and reliability you can depend on.

* Up to 98% efficiency.







XVers L - Type H Models 406L - 856L

Model (H7-)	MBTUH (kw/h)		Turndown	AHRI Thermal Efficiency	Dimensions In. (mm)					Shipping Weight lbs. (kg)	Water Content gal (L)
	Input	Output			A	Water Inlet/Outlet NPT	Flue ø	Air Intake ø	Gas NPT		
406L	399 (117)	391 (115)	10 to 1	98%	38.6 (980)	2	4 (100)	4 (100)	1	547 (248)	13 (50)
506L	500 (147)	489 (143)	10 to 1	97.8%	38.6 (980)	2	4 (100)	4 (100)	1	611 (277)	12 (46)
606L	600 (176)	586 (172)	7 to 1	97.6%	38.6 (980)	2	4 (100)	4 (100)	1-1/4	603 (274)	12 (46)
726L	725 (213)	705 (207)	7 to 1	97.3%	40 (1016)	2-1/2	6 (150)	6 (150)	1-1/4	710 (322)	17 (66)
856L	850 (250)	826 (242)	7 to 1	97.2%	40 (1016)	2-1/2	6 (150)	6 (150)	1-1/4	720 (326)	16 (62)

	Clearances in. (mm)	
	Combustible Minimum	Service Minimum
Front	Open	30 (762)
Rear	24 (610)	24 (610)
Right	0	0
Left	0	0
Top	0	24 (610)
Floor	0	0
Vent	1 (25)	1 (25)

Model	Boiler Current Draw	
	120VAC	208VAC
406L	< 7.5 A	< 5.0 A
506L	< 5.0 A	< 5.0 A
606L	< 5.0 A	< 5.0 A
726L	< 5.0 A	< 5.0 A
856L	< 7.5 A	< 7.5 A

Current draw is for heater only. (Supply breaker must have delayed trip).

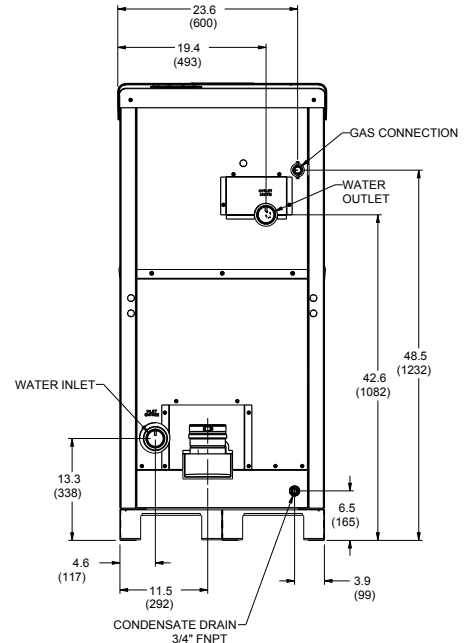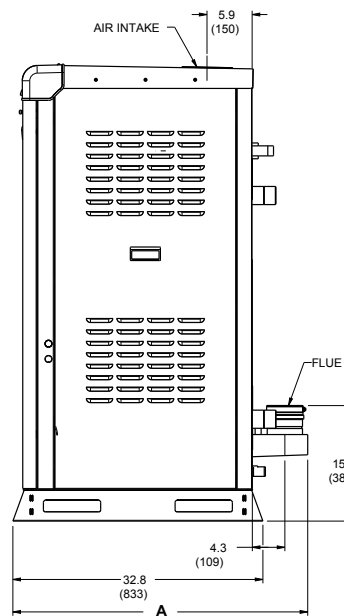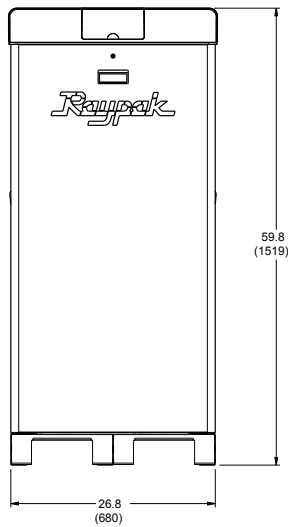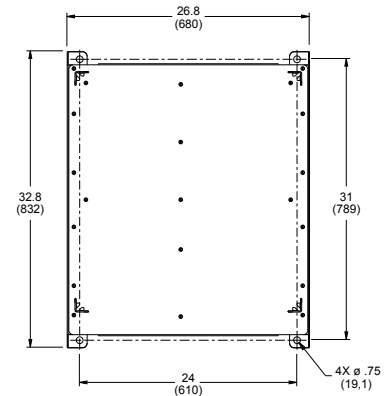

www.raypak.com

2151 Eastman Avenue | Oxnard, CA 93030 | 805-278-5300

Litho in U.S.A. ©2020 Raypak, Inc. 1000.28A Effective 08-01-20 Replaces 11-01-19