




FASTER HOT WATER

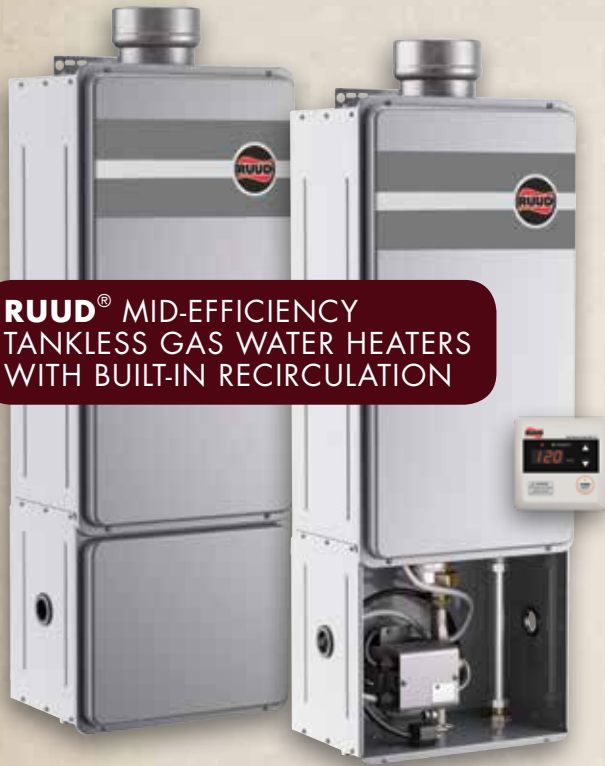

RUUD® MID-EFFICIENCY
TANKLESS GAS WATER HEATERS
WITH BUILT-IN RECIRCULATION

RUTG-RC95DVLN-1

Indoor DV ONLY
11,000-199,900 BTU/h
Natural and LP Gas Models

Recirculation Pump Specifications:

- 008-CT Taco Genie On Demand Pump with Wired push button activation
- Max. Pipe Lengths:
 - **3/4" copper pipe – 400 ft. total**
 - **1/2" copper pipe – 100 ft. total**

BUILT-IN RECIRCULATION BENEFITS:

Faster Hot Water at the Tap
On-Demand Activation
Save Time on Install with Pre-Plumbed Pump
Easy to Service Pump in Separate Cabinet

MID-EFFICIENCY TANKLESS:

- **.82 UEF Rating**
- **All-Copper Heat Exchanger**
- **1/2" Gas Line Compatible up to 24 ft.***
- **3"/5" Concentric Vent System** with condensate collector
- **Ultra Low NOx Burner** meets SCAQMD rule 1146.2

Ruud Exclusive Features

- **Maintenance Notice Setting**
Alerts homeowner to call for service check (optional)
- **Guardian Overheat Film Wrap**
Safety feature prevents dangerous temperatures and provides industry best 1/2" side-to-side clearance
- **Hot Start Programming**
Maintains consistent hot water by staying in ready-fire state for back-to-back hot water needs

• **Warranty**

- **12-Year** heat exchanger – Residential
- **5-Year** heat exchanger – Commercial
- **5-Year** parts including **Built-in Recirculation Pump**
- **1-Year** labor

*Based on Ruud testing of 1/2" gas line with gas supply of 7" w.c. up to 24'; Installation conditions vary; Consult the Ruud® Use and Care Manual, the Ruud® Gas Piping Facts brochure (TKR-GPF-12), the National Fuel Gas Code (NFPA 54, ANSI Z223.1), and any other local gas codes when installing a Ruud Tankless Water Heater.

Ruud.com

RELY ON RUUD.™



SPECIFICATIONS

DESCRIPTION				FEATURES					ROUGHING IN DIMENSIONS (SHOWN IN INCHES)					ENERGY INFO.		
MODEL NUMBER	GAS INPUT BTU/H	TYPE	NUMBER OF BATHROOMS*	TEMP. RANGE	MIN. FLOW/ACTIVATION GPM	GPM @ 67° RISE MAX.	GPM @ 45° RISE MAX.	MAX. GPM	CONNECTION		HEIGHT	WIDTH	DEPTH	VENT DIAM.	SHIP WEIGHT (LBS.)	UNIFORM ENERGY FACTOR (UEF)
WATER		GAS														
Ruud RUTG-RC95 Mid-Efficiency Series with Built-In Recirculation																
RUTG-RC95DVLN-1	11,000-199,900	Indoor DV w/ Recirc Pump	3-4	85° to 140° F	0.26/0.40	5.0	7.4	9.5	3/4	3/4	36-3/4	13-7/8	9-7/8	3 by 5 CONCENTRIC	80	0.82

MID-EFFICIENCY TANKLESS WITH BUILT-IN RECIRCULATION RUTG-RC95DVLN-1



Comes with Wired Push Button for System Activation and Crossover Valve for Recirculation using cold water line for return

ON DEMAND option for new construction or renovations with easy install and clean look.

	MID-EFFICIENCY WITH BUILT-IN PUMP	ON-DEMAND PUMP KIT	UNDER SINK DEMAND PUMP KIT	TIMER PUMP KIT
	RUTG-RC95DVLN-1	AP18403	AP18537	AP17920
Ideal for New Construction	✓	✓		✓
Ideal for Renovation	✓		✓	
On-Demand Activation	✓	✓	✓	
Timer Activation				✓
Compatible with Motion Activation	✓	✓	✓	
Dedicated Return Needed				✓
Crossover to Existing Plumbing Return	✓		✓	
Compatible with Entire Ruud Tankless Line		✓	✓	✓

ON-DEMAND PUMP KIT AP18403



ON DEMAND option for new construction for use with full Ruud Tankless line.

UNDER SINK DEMAND PUMP KIT AP18537



ON DEMAND option for renovations or homes without dedicated return line.

TIMER PUMP KIT AP17920



TIMER BASED option for new construction with a dedicated return.

ACCESSORIES



Service Valves – To isolate unit for easy flushing and maintenance (included with RTG-RC95DVL)



Crossover Valve – Uses cold water line for recirculation reducing install time (included with RTG-RC95DVL)



Remote Transmitter & Motion Sensor Activation Accessories for any Ruud On-Demand Recirculation pump (optional)

Pump kits and activation accessories can be ordered through Ruud Parts. For more information call 800-621-5622.

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.

Ruud Water Heating • 1115 Northmeadow Parkway, Suite 100
 Roswell, Georgia 30076 • 1.800.621.5622

PRINTED IN U.S.A. 12/17 WP FORM NO. TKR-95RC Rev.1

Ruud.com

