

Power Direct Vent Water Heaters



Professional Achiever™ Power Direct Vent gas water heaters are a perfect choice for tight construction or when indoor air quality is a concern

Efficiency

- .64 - .70 UEF
- ENERGY STAR® rated

Performance

- FHR: Up to 89 gallons for natural and LP gas
- Recovery: 38.4 to 40.4 GPH at a 90° F rise, depending on model

Self-Diagnostic System

- Electronic gas control for improved monitoring and service



Low Emissions

- Eco-friendly burner, low NOx design

Features

- Two pipe system: one pipe pulls in outside air for combustion and the other exhausts combustion gases
- 120 VAC powered blower
- New whisper quiet blower

Flammable Vapor Detection System

- Protective control system that disables the heater in the presence of flammable vapor accumulation

Flexible Venting Options

- Long venting lengths up to 100 feet
- PVC, ABS, or CPVC vent pipe options
- Vertical or horizontal termination
- Concentric vent kit available

Longer Life

- Premium grade anode rod provides long-lasting tank protection

High Altitude Compliant

- Models are certified for applications up to 10,200 feet above sea level

Plus...

- Enhanced flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Durable silicon nitride igniter (HSI)
- EverKleen™ patented system fights sediment build-up
- Standard replacement parts

Warranty

- 6-Year limited tank and parts warranty*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



**Professional Achiever
Power Direct Vent**
40 and 50-Gallon Capacities
Up to 40,000 Btu/h
Natural and LP Gas



LEED Point = 1

See specifications chart on back.


Power Direct Vent Water Heaters



Specifications

DESCRIPTION				FEATURES								ROUGHING IN DIMENSIONS (SHOWN IN INCHES)										ENERGY INFO.	
TYPE	NOMINAL GALLON CAP.	RATED GALLON CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° F RISE		UEF FIRST HR. DEL. G.P.H.		EF FIRST HR. DEL. G.P.H.		HEIGHT TO TOP OF VENT A	HEIGHT TO TOP OF AIR INLET B	TANK HEIGHT C	DIAM. D	HT. TO GAS CONN. E	WATER CONN. CNTR. F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	FRONT TO BACK I	SHIP WT. (LBS)	ENERGY FACTOR	UNIFORM ENERGY FACTOR (UEF)
				NAT.	LP	NAT.	LP	NAT.	LP	NAT.	LP												
Tall	40	38	PROG40-40N RU67 PDV	40	—	40.4	—	72	—	73	—	68-1/2	69-1/4	60-1/4	19-3/4	14	8	53-3/4	3/4	29-1/2	180	0.67	0.64
Tall	40	38	PROG40-38P RU67 PDV	—	38	—	38.4	—	72	—	73	68-1/2	69-1/4	60-1/4	19-3/4	14	8	53-3/4	3/4	29-1/2	180	0.67	0.64
Tall	40	48	PROG50-40N RU67 PDV	40	—	40.4	—	89	—	93	—	67-5/8	67-7/8	59-3/8	21-3/4	14	8	52-3/4	3/4	31-1/2	205	0.67	0.70
Tall	40	48	PROG50-40P RU67 PDV	—	40	—	40.4	—	89	—	93	67-5/8	67-7/8	59-3/8	21-3/4	14	8	52-3/4	3/4	31-1/2	205	0.67	0.70

Uniform Energy Factor, Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

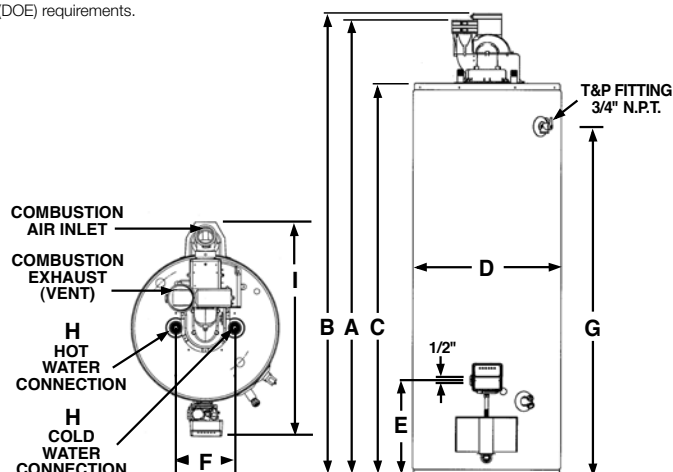

Air-Inlet Venting Information

FROM SEA LEVEL THROUGH 5,999 FT. ABOVE SEA LEVEL					
MODEL	VENT & COMBUSTION AIR-INLET SYSTEM DIAMETER (INCHES)	MIN. ALLOWED EQUIV. VENT & COMBUSTION AIR-INLET LENGTHS – EACH PIPE RUN (FT.)	MAX. ALLOWED EQUIV. VENT & COMBUSTION AIR-INLET LENGTHS – EACH PIPE RUN (FT.)	VENT AND COMBUSTION AIR-INLET SYSTEM TERMINATION(S)	
PROG40-40N RU67 PDV	2	7	30	90° Elbows	Concentric*
PROG40-40N RU67 PDV	3	7	60	90° Elbows	—
PROG40-40N RU67 PDV	3	7	50	—	Concentric*
PROG50-40N RU67 PDV	2	7	30	90° Elbows	Concentric*
PROG50-40N RU67 PDV	3	7	60	90° Elbows	—
PROG50-40N RU67 PDV	3	7	50	—	Concentric*

FROM 6,000 FT. ABOVE SEA LEVEL THROUGH 7,700 FT. ABOVE SEA LEVEL					
MODEL	VENT & COMBUSTION AIR-INLET SYSTEM DIAMETER (INCHES)	MIN. ALLOWED EQUIV. VENT & COMBUSTION AIR-INLET LENGTHS – EACH PIPE RUN (FT.)	MAX. ALLOWED EQUIV. VENT & COMBUSTION AIR-INLET LENGTHS – EACH PIPE RUN (FT.)	VENT AND COMBUSTION AIR-INLET SYSTEM TERMINATION(S)	
PROG40-40N RU67 PDV	2	7	15	90° Elbows	—
PROG40-40N RU67 PDV	2	7	30	—	Concentric*
PROG40-40N RU67 PDV	3	7	60	90° Elbows	—
PROG40-40N RU67 PDV	3	7	50	—	Concentric*
PROG50-40N RU67 PDV	2	7	15	—	Concentric*
PROG50-40N RU67 PDV	3	7	60	90° Elbows	—
PROG50-40N RU67 PDV	3	7	50	—	Concentric*

FROM 7,701 FT. ABOVE SEA LEVEL THROUGH 10,200 FT. ABOVE SEA LEVEL					
MODEL	VENT & COMBUSTION AIR-INLET SYSTEM DIAMETER (INCHES)	MIN. ALLOWED EQUIV. VENT & COMBUSTION AIR-INLET LENGTHS – EACH PIPE RUN (FT.)	MAX. ALLOWED EQUIV. VENT & COMBUSTION AIR-INLET LENGTHS – EACH PIPE RUN (FT.)	VENT AND COMBUSTION AIR-INLET SYSTEM TERMINATION(S)	
PROG40-40N RU67 PDV	2	7	15	—	Concentric*
PROG40-40N RU67 PDV	3	7	60	90° Elbows	—
PROG40-40N RU67 PDV	3	7	50	—	Concentric*
PROG50-40N RU67 PDV	3	7	60	90° Elbows	—
PROG50-40N RU67 PDV	3	7	50	—	Concentric*

One 90° elbow is approximately equivalent to 5 feet of pipe. One 45° elbow is approximately equivalent to 2.5 feet of pipe.

* Use only Ruud 3 inch concentric termination.

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.