PERFORMANCE PLATINUM



The new degree of comfort.™

PERFORMANCE **PLATINUM[™] Hybrid Electric is** the most efficient water heater available

Efficiency

- High 3.29- 3.40 UEF reduces operating cost
- ENERGY STAR[®] rated

Performance

- Delivers hot water faster than most standard electric water heaters – 65 gallons first-hour delivery for 50-gallon model, 73 gallons FHD for 65-gallon model and 85 gallons FHD for 80-gallon model
- Ambient operating range: 37-145° F is widest in class, offering more days of HP operation annually; designed to meet Northern Climate Spec (Tier 3)

Easy Installation

- Easy access side connections
- Quick access to electrical junction box
- Easily replaces a standard electric water heater

Integration

LCD Screen with built-in water sensor alert with audible alarm and service notifications



EcoNet[™] enabled WiFiconnected^{*} technology gives users control over water systems, allowing

for customizable temperature, energy savings and system monitoring at home or away. Visit Rheem.com/ EcoNetConnect

Water sensor detects water outside of the unit and sends an alert via the free Rheem EcoNet[™] mobile app to the homeowner

Control Settings

- Energy Saver
- 📕 Heat Pump
- High Demand
- Electric
- Vacation: 2-28 days (or placed on hold indefinitely)

Plus...

- Premium grade anode rod with resistor extends the life of the tank
- 3/4" NPT water inlet and outlet; 3/4" condensate drain connections
- Incoloy stainless steel resistor elements
- Dry-fire protection
- Easy access, top mounted washable air filter
- 2" Non-CFC foam insulation
- Enhanced flow brass drain valve
- Temperature and pressure relief valve installed
- Low lead compliant

Accessories

- Earthquake Kit part number SP20882, sold separately
- Vibration Isolation Kit part number SP20883, sold separately

Warranty

10-Year limited warranty for tank and parts, 1-year full in-home labor warranty See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.

* WiFi broadband internet connection required, EcoNet WiFi Kit sold separately



PERFORMANCE **PLATINUM Hybrid**

50, 65 and 80-Gallon Capacities 208-240 Volt / 1 PH / 24 Amps



See specifications chart on back.






PERFORMANCE **PLATINUM**[™] Hybrid Specifications

Fuel Type	Description	Nominal Gallon Capacity	Rated Gallon Capacity	Model Number	Energy Factor	Uniform Energy Factor (UEF)	Estimated Yearly Energy Cost	Compressor Btu/H	Sound Level (dBa)	First Hr. Rating G.P.H.	Recovery in G.P.H. 90° F Rise	Tank Height A	Diam. B	Ht. to Cold Inlet & Drain Valve	Ht. to Hot Outlet & T&P		Approx. Ship Wt. (LBS.)
Electric	Tall	50	45	XE50T10HD50U0	3.50 EF	3.29	\$118	4200	49	65	29	61"	22-1/4"	3-5/8"	39-5/8"	178	218
Electric	Tall	65	59	XE65T10HD50U0	3.50 EF	3.35	\$116	4200	49	73	29	64"	24-1/4"	3-7/8"	42-3/8"	225	262
Electric	Tall	80	72	XE80T10HD50U0	3.50 EF	3.40	\$175	4200	49	85	29	74"	24-1/4"	3-7/8"	52-3/8"	244	281

Uniform Energy Factor and Energy Factor based on Department of Energy (D.O.E.) requirements.

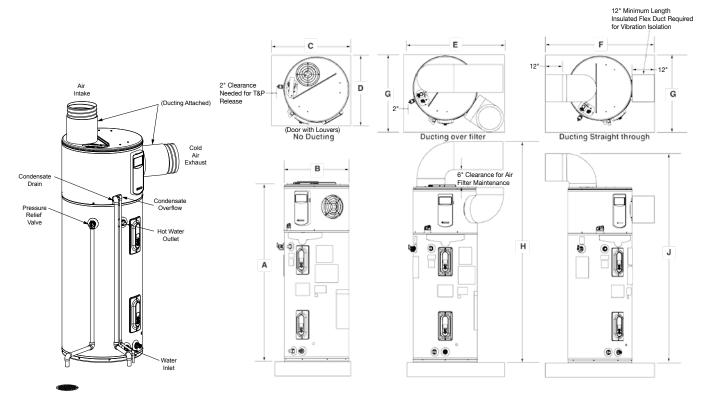

	Description	Dimensions (Shown in Inches)									
Gal. Cap.	Model Number	Α	В	C	D	E	F	G	н	J	
50	XE50T10HD50U0	61	22-1/4	28	24	36	50	27	77	73	
65	XE65T10HD50U0	64	24-1/4	30	26	38	52	29	80	76	
80	XE80T10HD50U0	74	24-1/4	30	26	38	52	29	90	86	

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.