

Ultra Low NOx Water Heaters



Professional Achiever™ Ultra Low NOx gas water heaters are SCAQMD rule 1121 compliant with 10 ng/J NOx emissions

Efficiency

- .58 - .62 EF
- More hot water at a low operating cost

Performance


- FHR: 53 - 91 gallons for natural gas
- Recovery rate is 30.3 - 40.4 gallons for natural gas at a 90 degree rise

Guardian System™ & Sensor

- Exclusive air/fuel shut-off device for double protection
- Maintenance free – no filter to clean

Low Emissions

- Ultra Low NOx radiant burner design
- Stainless steel construction
- SCAQMD Rule 1121 compliant
- Meets 10 ng/J NOx requirements



Self-Cleaning

- EverKleen™ patented system fights sediment build-up
- Reduces fuel costs
- Provides more hot water

Easy to Light

- No matches required

Longer Life

- Ruud exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

High Altitude Compliant

- Certified to 10,200 ft. above sea level

Plus...

- Enhanced flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Exclusive Ruudglas® lining

Warranty

- 6-Year limited tank and parts warranty*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.




Professional Achiever Ultra Low NOx

28, 38, 40, 48 and 50-Gallon Capacities
Up to 40,000 Btu/h
Natural Gas



†LEED Point = 1

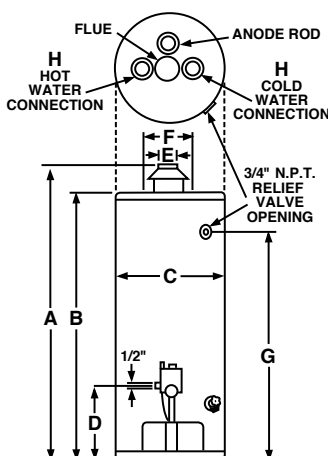

DESCRIPTION			FEATURES			ROUGHING IN DIMENSIONS (SHOWN IN INCHES)										ENERGY INFO.	
T Y P E	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H NAT.	RECOVERY IN G.P.H. 90° RISE NAT.	FIRST HOUR DEL. G.P.H. NAT.	HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	SHIP. WT. (LBS)	ENERGY FACTOR NAT.		
Tall	28	PROG28-30U RU62	30	30.3	53	59	56-1/4	16-1/8	17-3/8	3 or 4	8	50	3/4	105	0.62		
Tall	38	PROG38-38U RU60	38	38.4	72	60-5/8	57-3/4	18-1/8	17-3/8	3 or 4	8	51-5/8	3/4	125	0.60		
Tall	40	PROG40-38U RU62†	38	38.4	73	63	60-1/8	21	17-3/8	3 or 4	8	54	3/4	140	0.62		
Tall	48	PROG48-40U RU58	40	40.4	91	60-5/8	57-7/8	20-1/8	17-3/8	3 or 4	8	51-3/4	3/4	135	0.58		
Tall	50	PROG50-36U RU62†	36	36.4	91	62-5/8	59-7/8	23	17-3/8	3 or 4	8	53-5/8	3/4	170	0.62		
Short	38	PROG38S-36U RU60	36	36.4	68	51-7/8	49-1/8	20-1/8	17-3/8	3 or 4	8	43	3/4	135	0.60		

Energy Factor based on D.O.E. (Department of Energy) test procedures.

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.