

## Encore RMTGH is a series of High-Efficiency Condensing Tankless Gas Water Heaters designed for continuous hot water

### Efficiency

- .93 UEF (.95 - .96 EF) with stainless steel condensing heat exchanger

### Performance

- **Exclusive! Water Savings Setting** – upon activation, this setting can save up to 1,100 gallons water/year<sup>1</sup> by reducing flow at the tap until set temperature is achieved (optional)
- **Industry Best! Low Flow Activation** – Minimum flow rate of .26 GPM and minimum activation flow rate of .40 GPM ensures hot water even in low demand situations
- **Recirculation Pump Kit-Ready** – Providing faster hot water at the tap and savings of up to 12,000 gallons water/year<sup>2</sup>

### Easy Installation and Service

- **Vent with 2", 3" or 4" PVC**
- Built-in condensate neutralizer
- 1/2" Gas line compatibility<sup>3</sup>
- **Exclusive! Maintenance Notice Setting** – Alerts homeowner, after 500 hours of use, to call for service check (optional)
- Self-diagnostic system for easy installation and service
- High-altitude capability – up to 8,400 ft. elevation above sea level<sup>4</sup>

### Technology

- For higher demand applications, easily link multiple tankless units to operate as one system:
  - 2 Units: EZ Link cable
  - Up to 6 units: MIC-6 Control Board
  - Up to 20 units: MIC-185 plus MICS-180 manifold control assembly

### Low Emissions

- **Environmentally Friendly** ultra low NOx burner meets SCAQMD rule 1146.2 requirements

### Safety

- **Exclusive! Guardian OFW™ overheat film wrap** – prevents dangerous temperatures and provides industry best side-to-side clearance of 1/2 inch
- **Exclusive! Hot Start Programming** – Minimizes cold water bursts by staying in ready-fire state for back-to-back hot water needs

### Plus...

- Digital remote control and 10 ft. of thermostat wire included – shows temperature setting and service codes
- Supplied with a 120-volt power cord (indoor models only)
- **Industry Best! Freeze protection** to -30°F
- Maximum water temperature is 140°F. For higher temperature applications, upgrade kits are available

### Warranty

- 12-Year heat exchanger – residential, 5-year heat exchanger – commercial, 5-year parts and 1-year labor

See Warranty Certificate for complete information



**Encore Condensing Tankless**  
Indoor Direct Vent Model  
11,000-199,900 Btu/h  
Natural and LP Gas



**Encore Condensing Tankless**  
Outdoor Model  
11,000-199,900 Btu/h  
Natural and LP Gas

<sup>1</sup>Savings based on DOE test procedures.

<sup>2</sup>Pump kit designed for single unit applications only.

<sup>3</sup>Follow National Fuel Gas Code or local applicable codes.

<sup>4</sup>Contact customer service for exact altitude rating for each model.



LEED Points = 2

See specifications chart on back.

# Richmond®

The Water Heater Experts

## Encore Condensing Tankless

### Specifications

DESCRIPTION				FEATURES					ROUGHING IN DIMENSIONS (SHOWN IN INCHES)							ENERGY INFO.	
MODEL NUMBER	GAS INPUT BTU/H	TYPE	NUMBER OF BATHROOMS*	TEMP. RANGE	MIN. FLOW/ACTIVATION GPM	GPM @ 67° RISE MAX.	GPM @45° RISE MAX.	MAX. GPM	CONNECTION		HEIGHT	WIDTH	DEPTH	VENT DIAM.	SHIP WEIGHT (LBS.)	ENERGY FACTOR	UNIFORM ENERGY FACTOR (UEF)
									WATER	GAS							
Richmond <i>Encore</i> ® RMTGH-95																	
★ RMTGH-95DVLN-1	11,000-199,900	Indoor Direct Vent	4	85° to 140° F	0.26/0.40	5.7	8.5	9.5	3/4	3/4	27-1/2	18-1/2	9-3/4	2", 3" or 4" PVC 2-Pipe	82	0.96	0.93
★ RMTGH-95XLN-1	11,000-199,900	Outdoor	4	85° to 140° F	0.26/0.40	5.6	8.5	9.5	3/4	3/4	27-1/2	18-1/2	9-3/4	N/A	82	0.95	0.93
Richmond <i>Encore</i> ® RMTGH-84																	
★ RMTGH-84DVLN-1	11,000-157,000	Indoor Direct Vent	3	85° to 140° F	0.26/0.40	4.6	6.7	8.4	3/4	3/4	27-1/2	18-1/2	9-3/4	2", 3" or 4" PVC 2-Pipe	82	0.96	0.93
★ RMTGH-84XLN-1	11,000-157,000	Outdoor	3	85° to 140° F	0.26/0.40	4.5	6.7	8.4	3/4	3/4	27-1/2	18-1/2	9-3/4	N/A	82	0.95	0.93

\*Based on simultaneous showers using 2.5 GPM flow rate pre-mixed with cold water line. Flow rates vary depending on temperature of incoming cold water and water heater set temperature. Refer to flow rate curves for accurate sizing.

Uniform Energy Factor and Energy Factor based on Department of Energy (D.O.E.) requirements.

★ **ENERGY STAR®** compliant model.

All models are available in Natural Gas and Propane (LP). For Propane replace the N with P when ordering.

SCAQMD 1146.2 compliant.

Factory set maximum temperature is 120° F. See Use and Care Manual for setting.


Consult factory for information on sizing the application.

Vent Termination Kits are required for Direct Vent models. Contact your distributor for details.


Proper gas pressure must be ensured to supply tankless gas water heaters – up to 199,900 BTU/h for RMTGH-95 models and up to 157,000 BTU/h for RMTGH-84 models. (Consult your gas supplier)

Model Number	Temperature Rise (° F)									
	35°	45°	50°	60°	67°	70°	80°	90°	100°	
RMTGH-95 Water Flow (GPM)	9.5	8.5	7.7	6.4	5.7	5.5	4.8	4.3	3.8	
RMTGH-84 Water Flow (GPM)	8.4	6.7	6.0	5.0	4.6	4.3	3.8	3.3	3.0	


Above estimates are for sizing purposes only.

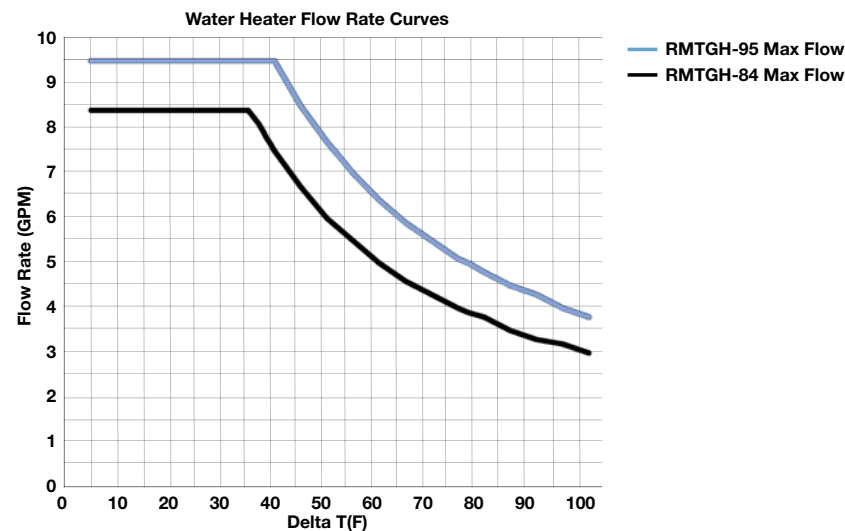

#### Indoor Direct Vent

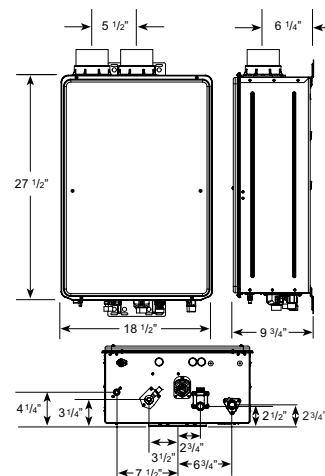

#### Outdoor

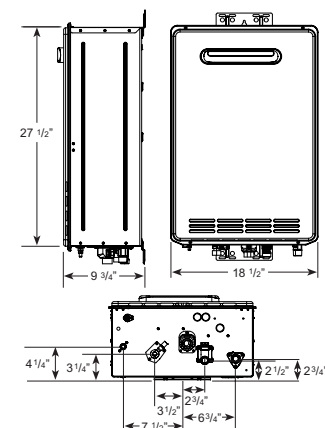

In keeping with its policy of continuous progress and product improvement, Richmond reserves the right to make changes without notice.