




The new degree of comfort.™

The Fury® electric water heater line is engineered for longer life – resistored heating elements and premium grade anode rod

Efficiency

- Stand by watts loss 62 - 87
- Isolated tank design reduces conductive heat loss
- High efficiency resistored heating element for added protection to prolong anode rod and tank life



Performance

- FHR: 42 - 99 gallons, based on gallon capacity
- Recovery rate is 21 gallons at a 90 degree Fahrenheit rise**

High Efficiency Models Feature

- High performance and lower operating cost
- Compliant with many electric utility incentive programs
- Anode rod equalizes aggressive water action and prolongs the life of the water heater



- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature

Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life



- Brass drain valve
- Temperature and pressure relief valve included

Warranty

- 6-Year limited tank and 1-year limited parts warranty*

*See Residential Warranty Certificate for complete information



Fury

30 to 63-Gallon Capacities
240 Volt AC/Single Phase
Double and Single Element Models
Electric



†LEED Point = 1

See dimensions chart on back.



The new degree of comfort.™



Residential Electric
Fury Water Heaters


DESCRIPTION				FEATURES						ROUGHING IN DIMENSIONS			ESTIMATED SHIPPING WEIGHT		STANDBY WATTS LOSS
MODEL NUMBER	STORAGE CAPACITY		ELEM. QTY.	120 VOLT		208 VOLT		240 VOLT		HEIGHT (IN.) A	OUTSIDE DIAMETER (IN.) B	HT. TO DRAIN VALVE (IN.) C	LBS.	KG	
	IMP. GALS.	LITRES		WATTAGE	AMPS	WATTAGE	AMPS	WATTAGE	AMPS						
TOP INLET															
RR317T	30	135	2	1500	12.5	2250	10.8	3000	12.5	46-1/2	19-3/4	3-1/2	105	48	62
RR415TM†	37.5	170	2	1500	12.5	2250	10.8	3000	12.5	46	21-3/4	3-1/2	117	53	66
RR615TM†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	59	23	3-1/2	177	80	87
RR620TM†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	58	24-5/16	3-1/2	188	85	72
SIDE INLET															
RR415BC-2†	38.5	175	2	N/A	N/A	2250	10.8	3000	12.5	47	21	3-1/2	124	56	64
RR615BC-2†	60	270	2	N/A	N/A	3380	16.3	4500	18.8	58	23	3-1/2	174	79	83

**Recovery = wattage/2.42 x temp. rise °F.
Example: 4500W / 2.42 x 90° = 21 GPH

**Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.



†LEED Point = 1

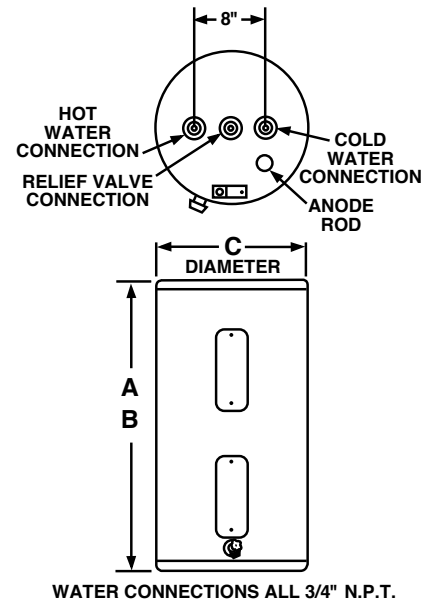

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT