



The new degree of comfort.™



Residential Gas  
Fury Heavy Duty ULN  
Water Heaters

## Fury® heavy duty ultra low NOx water heaters (14ng/J NOx emissions) exceed ANSI standards for flammable vapor ignition resistance

### Performance

- FHR: Up to 150-gallons for natural gas depending on model
- Recovery: 75.8 gallons at a 90° F rise

### Flammable Vapor Detection System

- Protective control system that disables the heater in the presence of flammable vapors
- Maintenance free – no filter to clean

### Self Diagnostic System

- Integrated system control for easy installation and service

### Environmentally Friendly Burner

- Eco-friendly burner, ultra low NOx design
- Meets 14 ng/J NOx requirements

### Longer Life

- Exclusive Rheemglas lining
- Patented Magnesium anode rod with resistor protects the tank from rust

### High Altitude Compliant

- All models are certified for applications up to 8,500 feet above sea level

### Plus...

- Brass drain valve and temperature and pressure relief valve are included
- Side water connections for space heating applications
- Standard replacement parts
- Standard 110-volt electrical connection
- Durable silicon nitride igniter – Hot Surface Ignition (HSI)

### Warranty

- 6-Year limited tank and parts warranty\*
- With ProtectionPlus™ the 6-year limited tank warranty becomes 10-year



\*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



## Fury Heavy Duty Ultra Low NOx

75 and 98-Gallon Capacities  
75,100 Btu/h  
Natural Gas

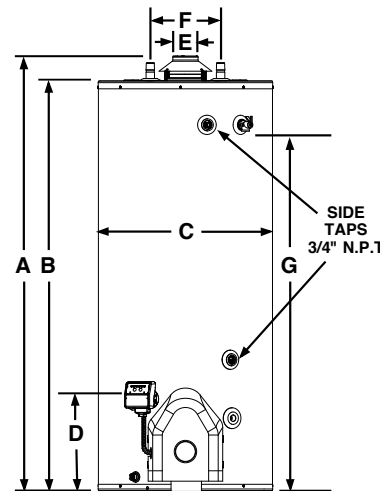

DESCRIPTION		FEATURES				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)								ENERGY INFO.			
T Y P E	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H NAT.	RECOVERY IN G.P.H. 90° RISE NAT.	FIRST HOUR DEL. G.P.H. NAT.	HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P G	WATER CONN. H	FRONT TO BACK I	SHIP WT. (LBS)	ENERGY FACTOR NAT.	AVG. ANN. OPER. COST NAT.
T A L L	75	42V75UF	75.1	75.8	120	64-1/8	60-1/4	26-1/4	14-1/4	4	11	52-1/4	1	33-3/4	300	N/A	N/A
	98	42V100UF	75.1	75.8	150	67-7/8	64	27-1/8	14-1/4	4	11	56-1/8	1	34-3/4	370	N/A	N/A

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road  
Montgomery, Alabama 36117-4305 • www.rheem.com



INTEGRATED HOME COMFORT