



The new degree of comfort.™



Commercial Gas
Medium Duty Ultra Low NOx
Water Heaters

Medium duty ultra low NOx gas commercial water heaters meet 14 ng/J NOx requirements and are designed for greater installation flexibility

Features and Benefits

The tighter the commercial retrofit, the more you will appreciate how this water heater's compact size simplifies installations. Choose from 80% Thermal Efficiency models with inputs of 75,100 Btu/h and maximum temperature settings of 180 degrees Fahrenheit.

Self-Diagnostic System

Integrated system control for easy installation and service

Ultra Low NOx Burner

The power assist burner design incorporates stainless steel multi-port burner tubes for long term ultra low NOx performance, less than 14 ng/J. A sight glass allows for burner observation. The entire design is removable and it is highly resistant to the effects of negative air pressure common in modern commercial buildings.

Patented Technology

Proprietary steel formulation with a unique coat of high temperature porcelain enamel to maximize corrosion resistance resulting in a superior tank design.

Patented Anode Rods

Magnesium anode rods are used to ensure corrosion resistance for a long tank life.

Efficiency

Rigid foam insulation provides superior insulating qualities, improves efficiency and reduces operating costs. Our patented process of injecting foam into the insulating cavity adds additional durability.

High Altitude Compliant

All models are certified for applications up to 8,500 feet above sea level.

CSA/ASME Rated T&P Valve

Factory installed relief valve

Full Port, Full Flow Brass Drain Valve

Factory installed brass drain valve allows for faster draining and servicing.

Plus

Side water connections for space heating applications

Standard replacement parts

Standard 110-volt electrical connection

Durable silicon nitride ignitor – Hot Surface Ignition (HSI)

Warranty

3-Year limited tank and 1-year limited parts warranty

See Commercial Warranty Certificate for complete information

Efficiency | These models have been tested according to DOE test procedures, and meet or exceed the thermal efficiency and standby loss requirements of current ASHRAE standards (Part of the Federally mandated Energy Policy Act (EPAct)). Also exceeds energy efficiency codes of all states including California Energy Commission (CEC).

Safety and Construction | These products are design certified by CSA Laboratories: a) For operation at 180°F. b) To meet all safety and construction requirements of ANSI Z21.10.1/ANSI Z21.10.3. c) As an automatic storage water heater. d) For operation of combustible floors and alcove installations. e) For combination water heating and space heating applications. All models are North Carolina and Massachusetts Code compliant. **Certified for 150 PSI maximum working pressure.**



Rheem Medium Duty Ultra Low NOx

75 and 98-Gallon Capacities
75,100 Btu/h
Natural Gas



INTEGRATED AIR & WATER



The new degree of comfort.™



Commercial Gas
Medium Duty Ultra Low NOx
Water Heaters


| RECOVERY CAPACITIES Recovery in U.S. Gallons/Hr. (GPH) and Liters/Hr. (LPH) at various temperature rises | | | | | | | | | | | | |
|--|-----------------------|-------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| MODEL NUMBER | INPUT (BTU/H) NATURAL | UNITS | 40°F | 50°F | 60°F | 70°F | 80°F | 90°F | 100°F | 110°F | 120°F | 130°F |
| | | | (22°C) | (28°C) | (33°C) | (39°C) | (45°C) | (50°C) | (56°C) | (61°C) | (67°C) | (72°C) |
| G75UN | 75,100 | GPH | 182 | 146 | 121 | 104 | 91 | 81 | 73 | 66 | 61 | 56 |
| | | LPH | 690 | 552 | 460 | 394 | 345 | 307 | 276 | 251 | 230 | 212 |
| G100UN | 75,100 | GPH | 182 | 146 | 121 | 104 | 91 | 81 | 73 | 66 | 61 | 56 |
| | | LPH | 690 | 552 | 460 | 394 | 345 | 307 | 276 | 251 | 230 | 212 |

| MAXIMUM DELIVERY Delivery in U.S. Gallons and Liters. (Includes useable storage and recovery for indicated times) | | | | | | | | | | | | | | | |
|---|----------|--------|------------------------------|------------|-------|------|------|------|------|------|------|------|------|------|-----------------------|
| MODEL NUMBER | CAPACITY | | INPUT (BTU/H) NATURAL & L.P. | TEMP. RISE | UNITS | 5 | 10 | 15 | 20 | 30 | 45 | 60 | 120 | 180 | MIN. TO REC. CONTENTS |
| | GALS | LITERS | | | | MIN. | MIN. | MIN. | MIN. | MIN. | MIN. | MIN. | MIN. | | |
| G75UN | 75 | 284 | 75,100 | 100 °F | GAL | 59 | 65 | 71 | 77 | 89 | 107 | 125 | 198 | 271 | 62 |
| | | | | 55.6 °C | LTR | 224 | 246 | 267 | 292 | 337 | 405 | 474 | 750 | 1027 | |
| G100UN | 98 | 371 | 75,100 | 100 °F | GAL | 75 | 81 | 87 | 93 | 105 | 123 | 141 | 214 | 287 | 81 |
| | | | | 55.6 °C | LTR | 283 | 306 | 329 | 352 | 398 | 467 | 536 | 812 | 1088 | |

| DIMENSIONAL INFORMATION All dimensions in English and Metric units | | | | | | | | | | | |
|--|--------|---------------|---------------|---------|--------------------|-------------|-------------------|-------------------------|--------------------|-----------------|--------------|
| MODEL NUMBER | UNITS | HT. TO VENT A | TANK HEIGHT B | DIAM. C | HT. TO GAS CONN. D | VENT SIZE E | WATER CONN. CTR F | HT. TO SIDE T&P VALVE G | WATER CONN. SIZE H | FRONT TO BACK I | SHIP. WEIGHT |
| G75UN | inches | 64-1/8 | 60-1/4 | 26-1/4 | 14-1/4 | 4 | 11 | 52-1/4 | 1 | 33-3/4 | 300 Lbs |
| | mm | 1629 | 1527 | 667 | 362 | 102 | 279 | 1327 | 25 | 857 | - |
| G100UN | inches | 67-7/8 | 64 | 27-1/8 | 14-1/4 | 4 | 11 | 56-1/8 | 1 | 34-3/4 | 370 Lbs |
| | mm | 1724 | 1626 | 689 | 362 | 102 | 279 | 1426 | 25 | 883 | - |

Recommended Specifications

Water heater(s) shall be model _____, manufactured by Rheem, having gas input of _____ Btu/h and a recovery rate of _____ GPH at a 100°F temperature rise. Water heater(s) shall have a storage capacity of _____ gallons. Water heater(s) shall have the CSA seal of certification and be factory equipped with an CSA/ASME rated temperature and pressure relief valve. Tank(s) shall have a coating of high temperature porcelain enamel and furnished with a magnesium anode rod rigidly supported and a brass drain valve. Water heater(s) shall meet or exceed the energy factor requirements of ASHRAE. Tanks shall have a working pressure rating of 150 psi, and shall be completely factory assembled, including a pressure regulator properly adjusted for operation on _____ gas. Controls will be arranged for safety shutoff in event of pilot failure. Complete unit shall be insulated with rigid polyurethane foam insulation.

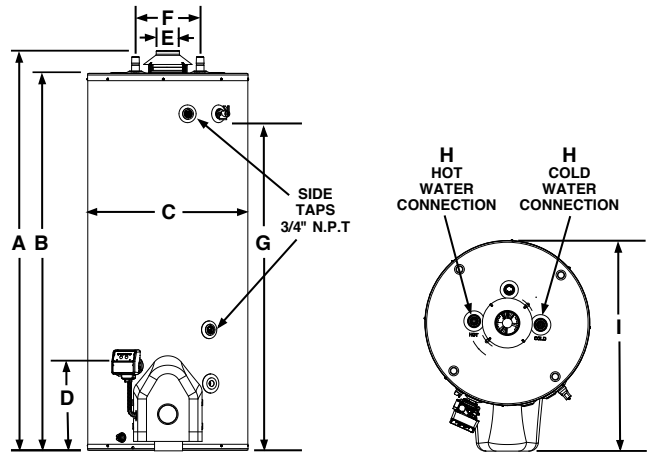

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED AIR & WATER