

# PERFORMANCE PLATINUM™



The new degree of comfort.™

## The PERFORMANCE PLATINUM™ High Efficiency atmospheric gas water heaters offer more hot water at a lower cost

### Efficiency

- .62 EF

### Performance

- FHR: 68 - 86 gallons
- Recovery rate is up to 40.4 gallons at a 90 degree rise, depending on model

### Diagnostic Valve

- Self powered diagnostic gas control valve for improved monitoring and service



### Low Emissions


- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

### Maintenance Free Burner System

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation



Combustion Shut-off System



Flame Arrestor Plate



Maintenance Free

### Self-Cleaning

- Fights sediment and mineral build-up
- Reduces fuel costs



### Longer Life

- Premium grade anode rod provides long-lasting tank protection

### High Altitude Compliant

- Certified to 10,200 ft. above sea level

### Plus...

- Dual certified for both potable water and space heating
- Durable brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Standard replacement parts
- Standard Cat. I, double-wall, B-vent, 3"/4" combo vent

### Warranty

- 12-Year limited warranty for tank and parts, 3-year full in-home labor warranty\*

\*See written warranty for complete details

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



## PERFORMANCE PLATINUM Atmospheric

40 and 50-Gallon Capacities  
Up to 40,000 Btu/h



LEED Point = 1

See dimensions chart on back.



The new degree of comfort.™


# PERFORMANCE PLATINUM™ High Efficiency Atmospheric Gas Specifications

Fuel Type	Description	Gallon Capacity	Model Number	Gas Input in Thous. Btu/h	Recovery in G.P.H. 90° Rise	First Hour Delivery G.P.H.	Ht. to Vent A	Tank Height B	Diam. C	Ht. to Gas Conn. D	Vent Size E	Water Conn. Center F	Ht. to Side T&P Valve G	Water Conn. Size H	Ship Weight (LBS)	Energy Factor
Natural Gas	Tall	50	XG50T12HE40UO	40	40.4	86	62-3/4	59-1/4	21-1/2	14	3 or 4	8	52-1/2	3/4	165	0.62
Natural Gas	Tall	40	XG40T12HE40UO	40	40.4	73	63-3/4	60-1/4	19-1/2	14	3 or 4	8	53-1/2	3/4	135	0.62
Natural Gas	Short	40	XG40S12HE38UO	38	38.4	72	53-3/4	50-1/4	21-1/2	14	3 or 4	8	44	3/4	125	0.62
Liquid Propane	Tall	50	XP50T12HE36UO	36	36.4	86	62-3/4	59-1/4	21-1/2	14	3 or 4	8	52-1/2	3/4	165	0.62
Liquid Propane	Tall	40	XP40T12HE36UO	36	36.4	68	63-3/4	60-1/4	19-1/2	14	3 or 4	8	53-1/2	3/4	135	0.62
Liquid Propane	Short	40	XP40S12HE36UO	36	36.4	72	53-3/4	50-1/4	21-1/2	14	3 or 4	8	44	3/4	125	0.62

Energy Factor based on D.O.E. (Department of Energy) test procedures.



LEED Point = 1

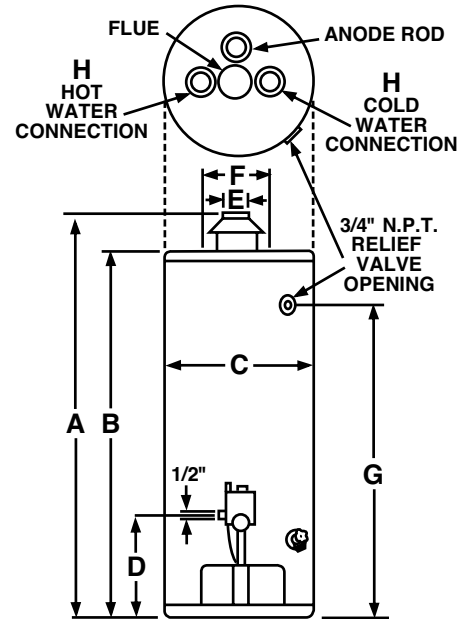

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road  
Montgomery, Alabama 36117-4305 • www.rheem.com