



The new degree of comfort.™



Residential Gas  
Professional **Classic Plus**  
Atmospheric Water Heaters

# Professional **Classic Plus**™ Atmospheric gas water heaters are engineered for more hot water at a low operating cost

## Efficiency


- .58 - .62 EF
- More hot water at a low operating cost

## Performance


- FHR: 72 to 88 gallons for natural gas
- Recovery: 25.5 to 38.2 gallons at a 90 degree rise, based on model

## Guardian System™ & Sensor

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean



Combustion Shut-off System



Flame Arrestor Plate



Maintenance Free

## Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

## Longer Life

- Premium grade anode rod provides long-lasting tank protection

## High Altitude Compliant

- All models certified up to 6,000 ft. above sea level

## Plus...


- Easy to light – no matches required
- EverKleen™ patented system fights sediment build-up
- Enhanced flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Standard replacement parts

## Warranty

- 8-Year limited tank and parts warranty\*
- With ProtectionPlus™ the 8-year limited tank warranty becomes 10-year ProtectionPlus – order part number SP20081 (6 pack only)

\*See Residential Warranty Certificate for complete information

These units have been tested according to C.S.A. test procedures and meet or exceed the energy efficiency requirements of NRCAN, ASHRAE standard 90 and all government efficiency performance criteria for energy consuming appliances.

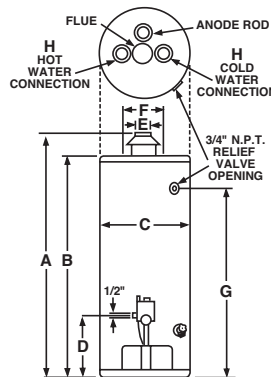

## Professional **Classic Plus** Atmospheric 40 and 50-Gallon Capacities Up to 45,000 Btu/h Natural and LP Gas



† LEED Point = 1

TYPE	DESCRIPTION		FEATURES					ROUGHING IN DIMENSIONS (SHOWN IN INCHES)									ENERGY INFO.	
	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.	HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	SHIP. WT. (LBS.)	ENERGY FACTOR NAT.	
			NAT.	LP	NAT.	LP	NAT.											
Short	40	PRO+G40S-40N CN59	40	36	34	30.5	72	54-1/4	50-1/2	20-1/4	14-1/2	3 or 4	8	44	3/4	130	0.59	
Short	40	PRO+G40S-38N CN62†	38	36	34	30.5	72	53-1/4	50-1/4	21-1/4	14-1/4	3 or 4	8	44	3/4	125	0.62	
Short	50	PRO+G50S-45N CN58	45	40	38.2	34	88	54-3/8	50-1/2	22-1/4	14-1/2	4	8	44	3/4	160	0.58	
Short	50	PRO+G50S-40N CN61†	40	36	36	32	86	54-1/4	51	23-3/4	14-1/4	3 or 4	8	44	3/4	160	0.61	

Specify LP gas when ordering. Add gas input and "P" to model number. Example: PRO+G40S-36P CN62

†Complies with ON/BC energy efficiency requirements.

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT