



The new degree of comfort.™




Residential Electric  
Professional *Classic Plus* Water Heaters

## Professional *Classic Plus*™ electric water heaters are engineered for longer life – resistored heating elements and premium grade anode rod

### Efficiency

- Standby watts loss 56 - 97
- Isolated tank design reduces conductive heat loss
- Resistored Lifeguard™ stainless steel upper and lower elements to prolong anode rod and tank life



### Performance

- FHR: 42 - 88 gallons, based on gallon capacity
- Recovery rate is 21 gallons at a 90 degree Fahrenheit rise\*\*

### Longer Life

- Rheem exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

### Features

- Electric junction box located above heating elements for easy installation
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature

### Plus...

- EverKleen™ self cleaning device fights harmful sediment build-up with a high-velocity spiraling water stream – helps operating efficiency by saving energy, money and improving tank life



- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant

### Warranty

- 8-Year limited tank and parts warranty\*
- With ProtectionPlus™ the 8-year limited tank warranty becomes 10-year
- ProtectionPlus - order part number SP20081 (6 pack only)

\*See Residential Warranty Certificate for complete information



### Professional *Classic Plus*

40 and 60 Imperial Gallon Capacities  
240 Volt AC/Single Phase  
Double Element Models  
Electric



See dimensions chart on back.



INTEGRATED HOME COMFORT



The new degree of comfort.™



## Professional **Classic Plus**™ Specifications


MODEL NUMBER	DESCRIPTION			FEATURES				ROUGHING IN DIMENSIONS										
	STORAGE CAP.			ELEM. QTY.	STANDARD ELEMENTS 208 VOLT		240 VOLT		HEIGHT A		DIAMETER B		HT. TO DRAIN VALVE C		ESTIMATED SHIP. WEIGHT		STANDBY WATTS LOSS	
	U.S. GALS.	IMP. GALS.	LITRES		WATT.	AMPS.	WATT.	AMPS.	IN.	MM	IN.	MM	IN.	MM	LBS.	KG		
<b>TOP INLET</b>																		
PRO+E40 M2 CN69	45	39	178	2	2250	10.8	3000	12.5	46	1168	21-3/4	552	3-1/2	89	117	53	69	
PRO+E40 M2 CN61†	45	39	178	2	2250	10.8	3000	12.5	49	1245	22.25	565.15	3.5	89	130	59	61	
PRO+E40 M2 CN61†	45	39	178	2	2850	10.8	3800	12.5	49	1245	22.25	565.15	3.5	89	130	59	61	
PRO+E40 M2 CN56	45	39	178	2	2250	10.8	3000	12.5	46	1168	24-1/4	616	3-1/2	89	134	61	56	
PRO+E60 T2 CN90	72	63	285	2	3380	16.3	4500	18.8	59	1499	23	584	3-1/2	89	177	80	90	
PRO+E60 T2 CN77	72	63	285	2	3380	16.3	4500	18.8	59	1499	24-1/2	622	3-1/2	89	188	85	77	
<b>BOTTOM INLET</b>																		
PRO+E40 M2 CN70†	45	39	178	2	2250	10.8	3000	12.5	46	1168	21-3/4	552	3-1/2	89	117	53	70	
PRO+E40 M2 CN70†	45	39	178	2	3380	16.3	4500	18.8	46	1168	21-3/4	552	3-1/2	89	117	53	70	
PRO+E60 T2 CN97†	72	63	285	2	3380	16.3	4500	18.8	59	1499	23	584	3-1/2	89	177	80	97	

• Heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring, and 4500 watt upper and lower heating elements.

† Complies with BC construction requirements. BC 40 imperial gallon top inlet models will have side T&P.

\*\*Recovery = wattage / (2.42 x temp. rise °F)  
Example:  $\frac{4500W}{2.42 \times 90^{\circ}} = 21 \text{ GPH}$

\*\*Recovery calculations used are based on 4500 watt elements used in non-simultaneous operation.

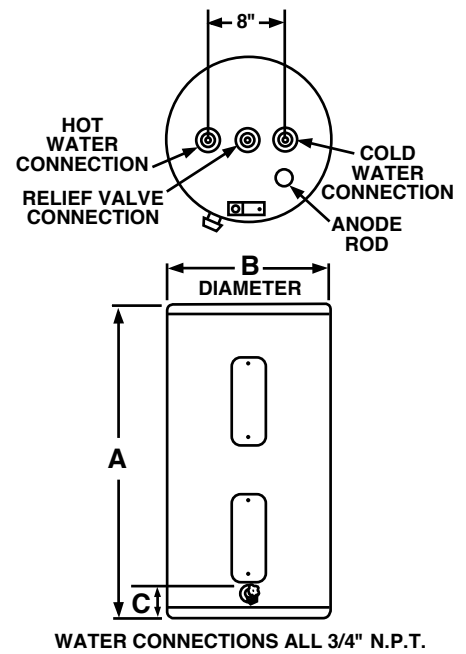

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT