



The new degree of comfort.™



Residential Electric  
Professional Classic  
Point-of-Use Water Heaters

## Professional Classic™ Point-of-Use electric water heaters feature a space-saving design for installation in limited spaces

### Efficiency

- Standby watts lose 53
- Single resistored stainless steel heating element to prolong anode rod and tank life

### Features

- High efficiency heating element
- Over-temperature protector cuts off power in excess temperature situations
- Automatic thermostat keeps water at desired temperature
- Wall bracket for easy wall mount installations and corrosion resistant 1/4 turn drain valve included with 2.5-gallon model



### Plus...

- Temperature and pressure relief valve
- Exclusive Rheemglas® tank lining resists corrosion and prolongs tank life
- 2.5 gallon model furnished with a 36 inch power cord.
- Enhanced-flow brass drain valve on 2.5-gallon model
- Low lead compliant

### Warranty

- 6-Year limited tank and parts warranty.\*

\*See Residential Warranty Certificate for complete information

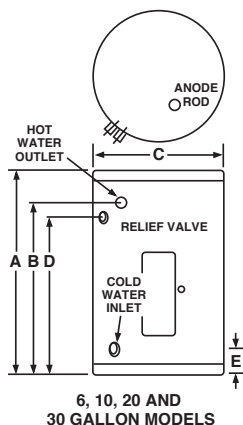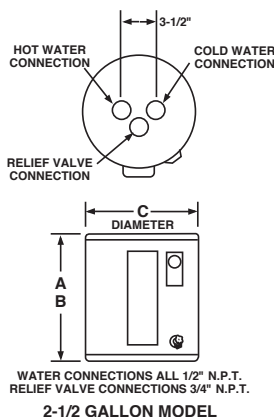

**Professional Classic**  
**Point-of-Use**  
2.5, 6, 10, 20 and  
30-Gallon Capacities  
120 Volt AC  
2-Wire Single Phase  
Electric



MODEL NUMBER	TANK CAPACITY			ROUGHING IN DIMENSIONS (SHOWN IN INCHES)						APPROX. SHIP WT.	
	U.S. GAL.	IMP. GAL.	LITRES	HEIGHT A	HEIGHT TO HOT WATER OUTLET B	DIAMETER C	HT. TO SIDE T&P VALVE D	HT. TO COLD WATER INLET E	(LBS.)	KG	
PROE2 1 CN POU	2.5	2	9	14	14	9-3/4	-	-	22	10	
PROE6 1 CN POU	6	5	23	15-1/4	12-1/2	15-3/4	11-1/2	4-1/4	36	16	
PROE10 1 CN POU	10	8.5	39	23	20-1/2	15-3/4	19-1/2	4-1/4	46	21	
PROE20 1 CN POU	20	17	77	25-1/4	22-3/4	19-3/4	21-3/4	5	69	31	
PROE30 1 CN53 POU	30	23	105	30	23	21-3/4	23	2-3/4	91	41	

• **2.5 gallon model:** 1/2" N.P.T. inlet and outlet. Relief valve connection 3/4". Available with 120 or 240 volt AC single phase only, 120v (1440w) 240v (1500w) Power cord supplied with 120 volt models only.

• **6 through 30 gallon models:** 3/4" N.P.T. outlet, inlet, anode rod, T & P valve connections. Not available with 3 phase wiring. Water heaters furnished standard with 120 volt AC, 2000 watt single element.

Special wiring options – a limited number of wiring options are available. Consult factory for price and availability.  
**CONSTRUCTION DETAILS:** The cold water enters the tank a few inches from the bottom. Both hot and cold water lines may be connected directly to the water heater without special nipples or tees. The relief valve simply screws into the opening provided.

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT