



PROJECT NAME			
LOCATION			
ARCHITECT			
ENGINEER			
CONTRACTOR			
SUBMITTED BY	DATE		
UNIT SUMMARY			
Quantity			
Unit Designation			
Model No.			
Total Cooling			
Sensible Cooling			
Air Ent. Evaporator			
Air Lvg. Evaporator			
Heating Input			
Heating Output			
CFM/ESP			
EER/SEER			
Electrical			
Minimum Ampacity			
MinMax. Breaker			
Net Unit Weight			
Accessory			
Catalog Form Number			
ACCESSORIES:	NOTES:		

# SUBMITTAL SHEET FOR PACKAGE GAS ELECTRIC RKNL- 13 SEER SERIES, RKPL- 14 SEER SERIES Featuring Earth-Friendly R-410A Refrigerant Nominal Sizes 3-5 Tons [10.6-17.6 kW]

UNIT DIMENSIONS FOR PACKAGE GAS ELECTRIC 3 TO 5 TON [10.6 TO 17.6 kW] MODELS

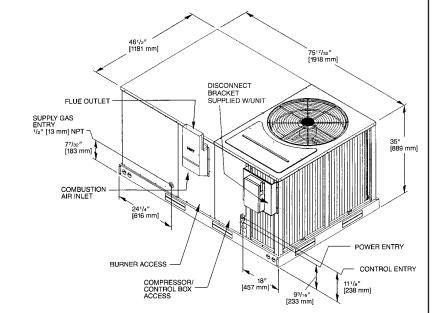

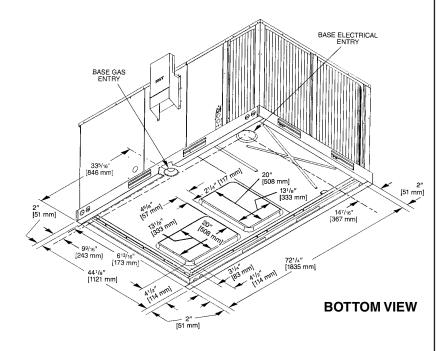

[ ] Designates Metric Conversions

### **UNIT DATA**

COOLING PERFORMANCE		
TOTAL CAPACITY* MBH		
SENSIBLE CAPACITY* MBH		
OUTDOOR DESIGN TEMP °F [°C] DB/WB		
TOTAL SUPPLY AIR CFM [L/s]		
TEMP. OF AIR ENTERING EVAPORATOR COIL °F [°C] DB/WB		
POWER INPUT REQUIREMENT kW		
SEER/EER RATING		

### HEATING PERFORMANCE GAS HEAT INPUT CAPACITY...... MBH GAS HEAT OUTPUT CAPACITY...... MBH

## STEADY STATE EFFICIENCY ......SUPPLY AIR BLOWER PERFORMANCE TOTAL SUPPLY AIR ......CFM [L/s]

### **ELECTRICAL DATA**


POWER SUPPLY	/
TOTAL UNIT AMPACITY	AMPS
MINIMUM WIRE SIZE	AWG
MAXIMUM OVERCURRENT DEVICE	
FLISES HACR BREAKER	AMPS

### **TOTAL UNIT WEIGHT**

TOTAL OPERATING WEIGHT .... \_\_\_\_\_ LBS [kg] (including field-installed accessories)

CLEAR	<b>ANCES</b>
-------	--------------

FRONT	48" [1219 mm]
CONDENSER COIL	18" [457 mm]
DUCT SIDE	12" [305 mm]
EVAPORATOR END	36" [914 mm]
ABOVE UNIT	60" [1524 mm]

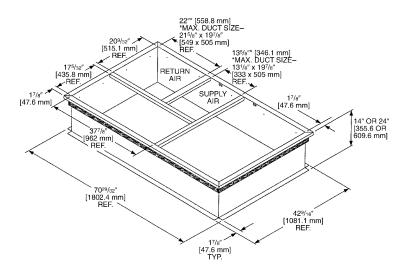

### ROOFCURB FOR RKNL/RKPL 3-5 TON [10.6-17.6 kW] MODELS

[ ] Designates Metric Conversions

### **ACCESSORIES**

Economizers Single Enthalpy	Condenser Coil Guards
Dual Enthalpy□	Low Ambient Control
CO <sub>2</sub> Sensor	Electric Heater Kits
	Concentric Diffuser
Fresh Air Dampers	Rectangular to Round Transition
Manual□	Roofcurb Adaptors
Motorized□	High Pressure Control□
	Low Pressure Control
	Time Delay□
	Unwired Convenience Outlet
	Unfused Disconnect□
	Stainless Steel Heat Exchange□
	Thermostat

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

RHEEM MANUFACTURING COMPANY 5600 Old Greenwood Road, Fort Smith, Arkansas 72908

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."