


PROJECT NAME						
LOCATION						
ARCHITECT						
ENGINEER						
CONTRACTOR						
SUBMITTED BY	DATE					
UNIT SUMMARY						
Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
MinMax. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						
ACCESSORIES:	NOTES:					

SUBMITTAL SHEET FOR PACKAGE AIR CONDITIONERS RLNL- 13 SEER SERIES, RLPL- 14 SEER SERIES NOMINAL SIZES 3-5 TONS [10.6-17.6 kW] FEATURING EARTH-FRIENDLY R-410A REFRIGERANT



JOB NAME		
CONTRACTOR		
ENGINEER		
LOCATION		
ORDER NO		
SUBMITTED FOR	☐ APPROVAL	RECORD
SUBMITTED BY		
DATE		
UNIT DESIGNATION		
MODEL NO.		

UNIT DIMENSIONS FOR PACKAGE AIR CONDITIONERS 3 TO 5 TON [10.6 TO 17.6 kW] MODELS

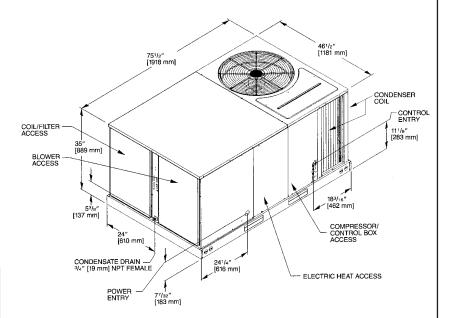

PRECOMMENDED DISCONNECT MOUNTING LOCATION 2" [51 mm] 2" [51 mm] 2" [51 mm] 3 / 2" [333 mm] 44 / 16" [1121 mm] 41 / 16" [1121 mm] 41 / 16" [51 mm] 41 / 16" [51 mm] 42 / 14" [51 mm] 43 / 14" [51 mm] 44 / 16" [1121 mm] 44 / 16" [51 mm] 45 / 15" [51 mm] 46 / 15" [51 mm] 47 / 16" [1121 mm] 48 / 12" [51 mm] 48 / 12" [51 mm] 49 / 16" [1121 mm] 40 / 10" [1121 mm] 41 / 16" [1121 mm]

UNIT DATA

COOLING PERFORMANCE		
TOTAL CAPACITY* MBH		
SENSIBLE CAPACITY* MBH		
OUTDOOR DESIGN TEMP °F [°C] DB/WB		
TOTAL SUPPLY AIR CFM [L/s]		
TEMP. OF AIR ENTERING EVAPORATOR COIL °F [°C] DB/WB		
POWER INPUT REQUIREMENT kW		
SEER/EER RATING		

ELECTRIC HEAT PERFORMANCE

ELECTRIC HEAT CAPACITY kW

SUPPLY AIR BLOWER PERFORMANCE

TOTAL SUPPLY AIR	CFM [L/s]
TOTAL RESISTANCE EXTERNAL TO UNIT	IWG
BLOWER SPEED	RPM
POWER OUTPUT REQUIREMENT	BHP
MOTOR RATING	HP [W]
POWER INPLIT REQUIREMENT	kW

ELECTRICAL DATA


POWER SUPPLY/_	/
TOTAL UNIT AMPACITY	AMPS
MINIMUM WIRE SIZE	AWG
MAXIMUM OVERCURRENT DEVICE	
ELICES HACD BDEAKED	VIVIDO

TOTAL UNIT WEIGHT

TOTAL OPERATING WEIGHT LBS [kg] (including field-installed accessories)

CLEARANCES				
FRONT	48" [1219 mm]			
CONDENSER COIL	18" [457 mm]			
DUCT SIDE	12" [305 mm]			
EVAPORATOR END	36" [914 mm]			
ABOVE UNIT	60" [1524 mm]			

[] Designates Metric Conversions

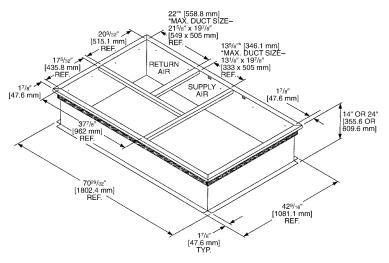

ROOFCURB FOR RLNL 3-5 TON [10.6-17.6 kW], RLPL 3-5 TON [10.6-17.6 kW] MODELS

[] Designates Metric Conversions

ACCESSORIES

Economizers	Condenser Coil Guards	□
Single Enthalpy□	L.P. Conversion Kits	
Dual Enthalpy□		
CO ₂ Sensor	Low Ambient Control	
	Electric Heater Kits	
Fresh Air Dampers	Concentric Diffuser	
Manual□	Rectangular to Round Transition	
Motorized□	Roofcurb Adaptors	
	High Pressure Control	
	Low Pressure Control	
	Thermostat	

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

RHEEM MANUFACTURING COMPANY 5600 Old Greenwood Road, Fort Smith, Arkansas 72908

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."