

HEAT PUMPS

Equipped with the Award Winning *Comfort Control System™*

- Increased Reliability
- On-Board Diagnostics
- Fault Recall
- *Active Protection™*



Rheem
Prestige[®]
S E R I E S

The Rheem *Prestige Series™* RPRL- JEZ Two-Stage Heat Pump Outdoor Units can provide year-round heating and cooling comfort for residential, multi-family and light commercial applications. They are designed to operate with Rheem indoor units with cooling and heating capacities certified under the AHRI Certification program.

These units also contain the most advanced alternate refrigerant which contains no chlorofluorocarbons (CFCs), or hydrochlorofluorocarbons (HCFCs), or other compounds that may leak from air-conditioning systems and potentially harm the protective ozone layer of the Earth's atmosphere.

The Rheem *Prestige Series™* RHPL- Air Handler, equipped with auxiliary heating elements for supplementary heat was designed especially for use with *Prestige Series™* heat pumps. Together they provide systems capable of delivering a maximum HSPF (Heating Seasonal Performance Factor) of 9.50 in the heating mode or a maximum standard S.E.E.R. (Seasonal Energy Efficiency Ratio) of 17.00 in the cooling mode.


The following additional features, plus its energy-saving characteristics, make the RPRL- JEZ Heat Pump outdoor unit an excellent choice for new construction or upgrading your present system.

- The *Comfort Control System™* provides on-board diagnostics and fault history for heat pump units with single-phase compressors by detecting system and electrical problems without adding sensors. It can also communicate "fault codes" to enabled "L terminal" thermostats. The integrated diagnostics with *Active Protection* prevents compressor operation when damage would occur.
- 7-Segment LED Display is exclusive only to Rheem products. The information-display quickly and accurately shows technicians the source of malfunctions.
- Dependable Two-Stage Scroll® Compressor for precise temperature control providing ultimate comfort.
- Attractive, louvered wrap-around jacket protects coil from weather extremes and yard hazards. Top grille is steel reinforced for extra strength. Cabinet is powder painted for all weather protection.
- Exclusive Combination Grille/Motor Mount secures the fan motor to the underside of the discharge grille. The grille protects the motor windings and bearings from rain and snow.
- Features a ten-year conditional unit replacement warranty when properly installed with a new Rheem *Prestige Series™* Air Handler or Rheem Indoor Coil with a Rheem *Prestige Series™* Gas Furnace. See product warranty card for additional information.
- All controls are accessible by removing one service panel. Removable top grille provides access to the outdoor fan motor and outdoor coil.
- Compressor compartment offers additional protection from the elements and reduces operating noise.
- GE® ECM fan motor is designed for low speed, quieter, energy-saving operation.
- Non-cycling reversing valve and demand defrost.
- All models meet or exceed a 1000-hour salt spray test per ASTM B117 Standard Practice for Operating Salt Spray Testing Apparatus.
- Dual-Fuel capable with select thermostats.
- The following "3 Heat/2 Cool" Rheem Thermostats are recommended for maximum comfort: RHC-TST302UNMS, RHC-TST303UNMS or RHC-TST402DFMS.

featuring **R-410A**

RPRL- JEZ Two-Stage Four Models

Efficiencies ranging up to 17 SEER in certain matched systems.
Nominal Sizes 2, 3, 4 & 5 Tons
[7.03, 10.5, 14.07 & 17.6 kW]



FEATURES & BENEFITS OF THE *COMFORT CONTROL SYSTEM*™

- The Rheem Exclusive 7 Segment LED Display easily shows system status codes and conditions.

- A Sealed Switch replaces the standard contactor and features optical control and latching mechanism. The sealed switch prevents infiltration of insects and dust. A minimal switching arc, by the optical control, offers greater reliability. The latching mechanism consumes less power while reducing chatter.




- The Status Indication and System Diagnostics feature thermostat communication capability, built-in diagnostics, high & low voltage monitoring and high & low switch monitoring.

The thermostat communication capability alerts the homeowner of any necessary service requirements. Faster, more accurate service is provided with the built-in diagnostics, by providing the HVAC professional with dependable information. Compressor reliability is increased with the high and low voltage monitoring feature. In addition, high and low pressure-switch monitoring prevents the system from operating when damage could occur.



- The Fault Recall feature will allow for the last six fault-codes to be displayed, and will retain these codes even if power failure occurs.
- Built-in short-cycle protection allows the compressor to restart easily without removing the oil from the compressor.
- A 30-second minimum run-time for every compressor call allows the oil to return to the compressor.
- *Active Protection* prevents the compressor from operating if damage could occur.
- The compressor and fan are controlled independently, which reduces the starting load and light dimming.
- A manual push-button is offered to operate the compressor and fan for 5 seconds to allow for an operation check.
- In order to save time and money, replacement automotive fuses can be utilized instead of replacing the entire control board.




STANDARD FEATURES

RPRL- JEZ Heat Pumps

1. 2-stage operation in both cooling and heating mode.
2. Scroll compressor is hermetically sealed and incorporates internal high temperature motor overload protection, and durable insulation on the motor windings. It is externally mounted on rubber grommets to reduce vibration and noise.
3. Compressors have an internal pressure relief assembly to protect against excessive pressure differential.
4. All refrigerant connections are on the exterior of the unit, located close to the ground for neat appearing installations.
5. Cabinet is constructed of powder painted galvanized steel. The full wraparound louvered grille protects the coil from damage.
6. Copper Tube—Aluminum Fin coils are used on all models.
7. The control box is located in the top corner of the cabinet providing for easy access through a service panel.
8. Service valves are standard on all models.
9. Field connections for power and control wiring are kept separate.
10. Every unit is factory charged and run-tested.
11. Separate compressor compartment for easy service access.
12. Drawn, painted base pan for extra corrosion resistance and sound reduction.
13. The RPRL- JEZ has a 10 year limited parts warranty, plus a 10 year conditional unit replacement warranty. See the General Terms of Limited Warranty for more details.
14. **Hard Start Kits**—Standard on all JEZ models.
15. Enhanced compressor sound wrap is standard.
16. Control Box Cover.
17. The RPRL- JEZ is shipped with a liquid line filter drier, (not-installed).
18. The RPRL- JEZ features factory-installed auto-reset low and high pressure controls.

Problem-Solving Accuracy

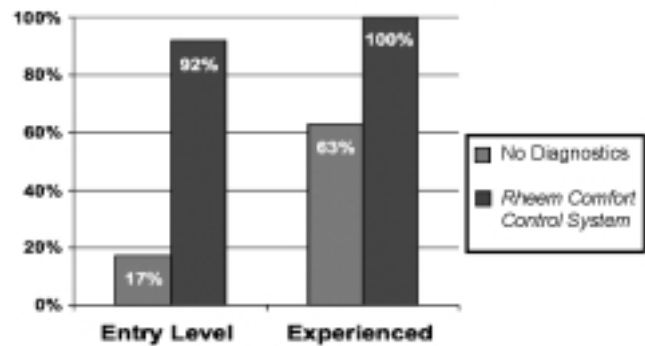

TWO-STAGE SCROLL® COMPRESSOR

The scroll compressor is the key to efficiency for this Rheem model. It's the latest in high-efficiency compressor technology. The advanced scroll compressor offers low noise and vibration characteristics and features tolerance to liquid refrigerant and system contamination. The scroll also has low start torque, eliminating start problems in the field. And its unique design enables the RPRL- JEZ Heat Pump to perform efficiently, quietly and reliably. All models have a 10-year compressor warranty as standard.



All controls and compressor are accessible for servicing by removal of the service panel.

Accessories

Outdoor Thermostats—

- RXPT-A01—One outdoor thermostat in box.
- RXPT-A02—One outdoor thermostat for mounting in box for use with RXPT-A01 or A03.
- RXPT-A03—One outdoor thermostat with emergency Heat Relay wired and mounted in box.
- RXPT-A04—Two outdoor thermostats with emergency Heat Relay wired and mounted in box.

Thermostats



100-Series *
Non-Programmable



200-Series *
Programmable



300-Series *
Deluxe
Programmable



400-Series *
Special Applications/
Programmable

500-Series *
Communicating/
Programmable

| Brand | Unique Model Number Prefix | Descriptor (3 Characters) | Series (3 Characters) | System (2 Characters) | Type (2 Characters) |
|-----------|----------------------------|---------------------------|---|---|-----------------------------------|
| RHC | - | TST | 101 | GE | MS |
| RHC=Rheem | | TST=Thermostat | 100=Non-Programmable 200=Programmable 300=Deluxe Programmable 400=Special Applications/ Programmable/ 500=Communicating/ Programmable | GE=Gas/Oil/Electric HP=Heat Pump MD=Modulating Furnace DF=Dual Fuel UN=Universal AC/HP/GE CM=Communicating | SS=Single-Stage MS=Multi-Stage |

* Photos are representative. Actual models may vary.

For detailed thermostat match-up information, see specification sheet form number T11-001.

NOTE: Requires “3 Heat/2 Cool” thermostat for Maximum Comfort.

- **Blower Time Delay Control**—RXMD-C06.
- **Fossil Fuel Kits**—Not required. See Rheem Thermostats Specification Sheet (T11-001).
- **Low Ambient Control**—Cycles outdoor fan to maintain adequate condensing pressures assuring liquid refrigerant flow to the coil. Allows low temperature operation in the cooling cycle down to 0°F [-17.8°C] outdoor temperature. It is recommended that this control be installed in units to be operated at outdoor ambient temperatures under 70°F [21°C] (Model No. RXAD-A08)

Model Number Identification

| R | P | R | L | — | 024 | J | E | Z |
|-------|-------------------------------|--------------------|----------------------|---|---|------------------------|---|--|
| RHEEM | REMOTE HEAT PUMP | EFFICIENCY 16 SEER | DESIGN SERIES R-410A | | COOLING CAPACITY | ELECTRICAL DESIGNATION | VARIATIONS E = EQUIPPED WITH THE COMFORT CONTROL SYSTEM™ | COOLING CONNECTION FITTING Z = SWEAT W/SCROLL |
| [] | Designates Metric Conversions | | | | 024 = 24,000 BTU/HR [7.03 kW] 036 = 36,000 BTU/HR [10.55 kW] 048 = 48,000 BTU/HR [14.07 kW] 060 = 60,000 BTU/HR [17.58 kW] | J = 208/230V-1-6Ø | | |

Rheem Heat Pump System

For all season home comfort, performance and energy conservation, choose a Rheem *Prestige Series*™ RPRL- JEZ Series Heat Pump and with an RHPL- Series Air Handler.

More than a reverse cycle air conditioner, it's a specially designed combination Winter/Summer comfort system using an indoor coil for heating and cooling.

To choose an RHPL- Air Handler designed for use with the RPRL- JEZ Heat Pump, refer to the Performance Data Tables and/or the air handler specification sheet.

Performance Data AHRI Standard Conditions

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | | |
|-----------------------|---------------|--|-------|--|--------------|-------------------|--------------|-------|-----------------------------|---|--|--------------------------|--|--------------|-----------------------------------|--------------------------|---------------------------------------|--------------|------------|
| | | | | ID Coil | ID Air Mover | AHRI Ratings | | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | |
| | | | | | | Total Capacity | SEER | EER | | | BTU/H [kW] | Net Latent BTU/H [kW] | BTU/H [kW] | COP | BTU/H [kW] | | COP | BTU/H [kW] | BTU/H [kW] |
| Rev. 6/30/10 | | | 1 | RGFD-067MCK? | 11,200 [3.3] | 7,300 [2.1] | 23,800 [7.0] | 16.50 | 12.50 | 600 [283] | 71 | 17,200 [5.0] | 3.66 | 10,400 [3.0] | 2.56 | 17,200 [5.0] | 10,400 [3.0] | 9.65 | |
| | | | 2 | RGFD-072MCK? | 17,750 [5.2] | 6,050 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,200 [5.0] | | 17,200 [5.0] | | 10,400 [3.0] | 9.65 |
| | | | 1 | RGFD-072MCK? | 11,200 [3.3] | 7,300 [2.1] | 24,000 [7.0] | 16.50 | 12.60 | 600 [283] | 71 | 17,100 [5.0] | 3.68 | 10,400 [3.0] | 2.58 | 17,100 [5.0] | 10,400 [3.0] | 9.70 | |
| | | | 2 | RGFE-067MCK? | 17,800 [5.2] | 6,200 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | 10,300 [3.0] | 9.70 |
| | | | 1 | RGFE-067MCK? | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 16.50 | 12.80 | 575 [271] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RGFE-077MCK? | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | 10,300 [3.0] | 9.70 |
| | | | 1 | RGFE-077MCK? | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 12.90 | 600 [283] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.58 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RGGD-067MCK? | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | 10,300 [3.0] | 9.70 |
| | | | 1 | RGGD-067MCK? | 11,200 [3.3] | 7,400 [2.2] | 24,000 [7.0] | 17.00 | 12.80 | 600 [283] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RGGD-077MCK? | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | 10,400 [3.0] | 9.70 |
| | | | 1 | RGGD-077MCK? | 11,200 [3.3] | 7,300 [2.1] | 24,000 [7.0] | 17.00 | 12.70 | 625 [295] | 71 | 17,100 [5.0] | 3.68 | 10,400 [3.0] | 2.58 | 17,100 [5.0] | 10,400 [3.0] | 9.70 | |
| | | | 2 | RGGD-077MCK? | 17,800 [5.2] | 6,200 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | 10,300 [3.0] | 9.70 |
| | | | 1 | RGGD-077MCK? | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 13.00 | 625 [295] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RGGD-077MCK? | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | 10,300 [3.0] | 9.70 |
| 024JEZ | | | 1 | RGGE-067MCK? | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 17.00 | 12.85 | 575 [271] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 2 | RGGE-077MCK? | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | 10,300 [3.0] | 9.75 |
| | | | 1 | RGJD-067MCK? | 11,200 [3.3] | 7,400 [2.2] | 24,000 [7.0] | 17.00 | 12.80 | 600 [283] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RGJD-077MCK? | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | 10,300 [3.0] | 9.70 |
| | | | 1 | RGJD-077MCK? | 11,200 [3.3] | 7,300 [2.1] | 24,000 [7.0] | 17.00 | 12.70 | 625 [295] | 71 | 17,100 [5.0] | 3.68 | 10,400 [3.0] | 2.58 | 17,100 [5.0] | 10,400 [3.0] | 9.70 | |
| | | | 2 | RGJF-067MCK? | 17,800 [5.2] | 6,200 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | 10,300 [3.0] | 9.70 |
| | | | 1 | RGJF-067MCK? | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 13.00 | 625 [295] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 2 | RGJF-077MCK? | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | 10,300 [3.0] | 9.75 |
| | | | 1 | RGLE-077AMK? | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 17.00 | 12.85 | 575 [271] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 2 | RGLR-077AMK? | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | 10,300 [3.0] | 9.75 |
| | | | 1 | RGLR-077AMK? | 11,250 [3.3] | 7,350 [2.2] | 24,000 [7.0] | 17.00 | 13.00 | 600 [283] | 71 | 17,100 [5.0] | 3.74 | 10,300 [3.0] | 2.62 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 2 | RGLR-077AMK? | 17,900 [5.2] | 6,100 [1.8] | | | | 800 [378] | 74 | 26,000 [7.6] | | 17,000 [5.0] | | 17,000 [5.0] | | 10,300 [3.0] | 9.75 |
| | | | 1 | RGLR-077AMK? | 11,250 [3.3] | 7,350 [2.2] | 24,000 [7.0] | 17.00 | 13.00 | 600 [283] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.62 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 2 | RGLR-077AMK? | 17,900 [5.2] | 6,100 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | 10,300 [3.0] | 9.75 |
| | | | 1 | RGPE-057BMK? | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 16.50 | 12.90 | 575 [271] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RGPE-057BMK? | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | 10,300 [3.0] | 9.70 |
| | | | 1 | RGPE-077AMK? | 11,200 [3.3] | 7,400 [2.2] | 24,400 [7.1] | 17.00 | 13.10 | 625 [295] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 2 | RGPR-057BMK? | 18,100 [5.3] | 6,300 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | 10,300 [3.0] | 9.75 |
| | | | 1 | RGPR-057BMK? | 11,150 [3.3] | 7,350 [2.2] | 24,000 [7.0] | 16.50 | 12.80 | 600 [283] | 71 | 17,200 [5.0] | 3.70 | 10,400 [3.0] | 2.60 | 17,200 [5.0] | 10,400 [3.0] | 9.65 | |
| | | | 2 | RGPR-057BMK? | 17,850 [5.2] | 6,150 [1.8] | | | | 775 [366] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | 10,400 [3.0] | 9.65 |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF |
|-----------------------|---------------|----------------------|--------------|--|--------------|--------------|----------------------------|--------------------------|-----------------------------|-----------------------|--|--------------|--|---|-----------------------------------|--------------|---------------------------------------|------|--|--------------------------|
| | | | | AHRI Ratings | | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | |
| | | | | Total Capacity | SEER | EER | | | | | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | COP | | | | |
| Rev. 6/30/10 | RCFL-H*2617 | RGRM-04?MAE? | 1 | 11,200 [3.3] | 7,300 [2.1] | 23,800 [7.0] | 17.00 | 12.60 | 575 [271] | 71 | 17,100 [5.0] | 3.68 | 10,400 [3.0] | 2.58 | 17,100 [5.0] | 10,400 [3.0] | 9.65 | | | |
| | | | 2 | 17,750 [5.2] | 6,050 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | | | |
| | | RGRM-06?MAE? | 1 | 11,200 [3.3] | 7,300 [2.1] | 24,200 [7.1] | 17.00 | 12.75 | 600 [283] | 71 | 17,100 [5.0] | 3.68 | 10,400 [3.0] | 2.58 | 17,100 [5.0] | 10,400 [3.0] | 9.70 | | | |
| | | | 2 | 18,000 [5.3] | 6,200 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | | | |
| | | RGRM-07?MAE? | 1 | 11,150 [3.3] | 7,350 [2.2] | 24,200 [7.1] | 16.50 | 12.50 | 625 [295] | 71 | 17,200 [5.0] | 3.62 | 10,500 [3.1] | 2.54 | 17,200 [5.0] | 10,500 [3.1] | 9.55 | | | |
| | | | 2 | 18,000 [5.3] | 6,200 [1.8] | | | | 850 [401] | 74 | 26,400 [7.7] | | 17,300 [5.1] | | 17,300 [5.1] | | | | | |
| | 024JEZ | RCFL-H*2617+RXMD-C06 | RGTM-06?MAE? | 1 | 11,550 [3.4] | 7,550 [2.2] | 24,200 [7.1] | 16.50 | 12.85 | 750 [354] | 71 | 17,200 [5.0] | 3.68 | 10,500 [3.1] | 2.58 | 17,200 [5.0] | 10,500 [3.1] | 9.60 | | |
| | | | | 2 | 18,000 [5.3] | 6,200 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | | |
| | | | Coil Only | 1 | 13,900 [4.1] | 4,100 [1.2] | 23,600 [6.9] | 14.50 | 11.65 | 625 [295] | 71 | 17,600 [5.2] | 3.52 | 10,900 [3.2] | 2.48 | 17,600 [5.2] | 10,900 [3.2] | 9.10 | | |
| | | | | 2 | 17,450 [5.1] | 6,150 [1.8] | | | | 775 [366] | 74 | 26,600 [7.8] | | 17,500 [5.1] | | 17,500 [5.1] | | | | |
| | | | RGFD-06?MCK? | 1 | 11,200 [3.3] | 7,300 [2.1] | 23,800 [7.0] | 16.50 | 12.55 | 600 [283] | 71 | 17,100 [5.0] | 3.66 | 10,400 [3.0] | 2.58 | 17,100 [5.0] | 10,400 [3.0] | 9.65 | | |
| | | | | 2 | 17,750 [5.2] | 6,050 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | | |
| RGFD-07?MCK? | | 1 | 11,200 [3.3] | 7,300 [2.1] | 24,000 [7.0] | 16.50 | 12.65 | 600 [283] | 71 | 17,100 [5.0] | 3.68 | 10,400 [3.0] | 2.58 | 17,100 [5.0] | 10,400 [3.0] | 9.70 | | | | |
| | | 2 | 17,800 [5.2] | 6,200 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | | | | |
| RGFE-06?MCK? | | 1 | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 16.50 | 12.80 | 575 [271] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | | | |
| | | 2 | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | | |
| RGFE-07?MCK? | | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 12.95 | 600 [283] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | | | |
| | | 2 | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | | |
| RGGD-06?MCK? | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,000 [7.0] | 17.00 | 12.85 | 600 [283] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | | | | |
| | 2 | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | | | |
| RGGD-07?MCK? | 1 | 11,200 [3.3] | 7,300 [2.1] | 24,000 [7.0] | 17.00 | 12.75 | 625 [295] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | | | | | |
| | 2 | 17,800 [5.2] | 6,200 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | | | | | |
| RGGE-06?MCK? | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 13.05 | 625 [295] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | | | | |
| | 2 | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | | | |
| RGGE-07?MCK? | 1 | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 17.00 | 12.85 | 575 [271] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | | | | |
| | 2 | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | | | |
| RGJD-06?MCK? | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,000 [7.0] | 17.00 | 12.85 | 600 [283] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | | | | |
| | 2 | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | | | |
| RGJD-07?MCK? | 1 | 11,200 [3.3] | 7,300 [2.1] | 24,000 [7.0] | 17.00 | 12.75 | 625 [295] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | | | | | |
| | 2 | 17,800 [5.2] | 6,200 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | | | | | |
| RGJF-06?MCK? | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 13.05 | 625 [295] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | | | | |
| | 2 | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | | | |
| RGJF-07?MCK? | 1 | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 17.00 | 12.85 | 575 [271] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | | | | |
| | 2 | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPR/L | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | | |
|-----------------------|---------------|--|-------|--|--------------|-------------------|--------------|-------|-----------------------------|---|--|--------------------------|--|--------------|-----------------------------------|--------------------------|---------------------------------------|------------|-----|
| | | | | ID Coil | ID Air Mover | AHRI Ratings | | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | |
| | | | | | | Total Capacity | SEER | EER | | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | BTU/H [kW] | COP | BTU/H [kW] | | COP | BTU/H [kW] | COP |
| Rev. 6/30/10 | | | 1 | RGLE-07?AMK? | 11,250 [3.3] | 7,350 [2.2] | 24,000 [7.0] | 17.00 | 13.05 | 600 [283] | 71 | 17,000 [5.0] | 3.74 | 10,300 [3.0] | 2.62 | 17,000 [5.0] | 10,300 [3.0] | 9.80 | |
| | | | 2 | RGLR-07?AMK? | 17,900 [5.2] | 6,100 [1.8] | 24,000 [7.0] | 17.00 | 13.00 | 800 [378] | 74 | 26,000 [7.6] | 3.74 | 17,000 [5.0] | 2.62 | 17,000 [5.0] | 10,300 [3.0] | 9.80 | |
| | | | 1 | RGPE-05?BMK? | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 16.50 | 12.90 | 575 [271] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 2 | RGPE-07?AMK? | 11,200 [3.3] | 7,400 [2.2] | 24,400 [7.1] | 17.00 | 13.15 | 625 [295] | 71 | 17,000 [5.0] | 3.74 | 10,300 [3.0] | 2.62 | 17,000 [5.0] | 10,300 [3.0] | 9.80 | |
| | | | 1 | RGPR-05?BMK? | 11,150 [3.3] | 7,350 [2.2] | 24,000 [7.0] | 16.50 | 12.80 | 600 [283] | 71 | 17,100 [5.0] | 3.70 | 10,400 [3.0] | 2.60 | 17,100 [5.0] | 10,400 [3.0] | 9.65 | |
| | | | 2 | RGPR-07?AMK? | 17,850 [5.2] | 6,150 [1.8] | 24,000 [7.0] | 17.00 | 12.90 | 800 [378] | 74 | 26,200 [7.7] | 3.72 | 17,000 [5.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 1 | RGRM-04?MAE? | 11,200 [3.3] | 7,300 [2.1] | 24,000 [7.0] | 17.00 | 12.65 | 575 [271] | 71 | 17,100 [5.0] | 3.68 | 10,300 [3.0] | 2.58 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RGRM-06?MAE? | 17,800 [5.2] | 6,200 [1.8] | 24,000 [7.0] | 17.00 | 12.80 | 800 [378] | 74 | 26,200 [7.7] | 3.70 | 17,100 [5.0] | 2.58 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| 024JEZ | | | 1 | RGRM-07?MAE? | 11,150 [3.3] | 7,350 [2.2] | 24,200 [7.1] | 16.50 | 12.55 | 600 [283] | 71 | 17,200 [5.0] | 3.64 | 10,400 [3.0] | 2.56 | 17,200 [5.0] | 10,400 [3.0] | 9.60 | |
| | | | 2 | RGTM-06?MAE? | 18,000 [5.3] | 6,200 [1.8] | 24,200 [7.1] | 17.00 | 12.90 | 825 [389] | 74 | 26,400 [7.7] | 3.70 | 17,100 [5.0] | 2.60 | 17,200 [5.0] | 10,400 [3.0] | 9.60 | |
| | | | 1 | ROCA-07?E03 | 10,900 [3.2] | 7,700 [2.3] | 24,000 [7.0] | 16.50 | 13.05 | 600 [283] | 71 | 17,000 [5.0] | 3.74 | 10,300 [3.0] | 2.62 | 17,000 [5.0] | 10,300 [3.0] | 9.80 | |
| | | | 2 | ROLA-07?E03 | 17,600 [5.2] | 6,400 [1.9] | 24,000 [7.0] | 16.50 | 13.00 | 800 [378] | 74 | 26,000 [7.6] | 3.74 | 16,900 [5.0] | 2.62 | 17,000 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 1 | Coil Only | 13,900 [4.1] | 4,100 [1.2] | 23,600 [6.9] | 14.50 | 11.65 | 625 [295] | 71 | 17,600 [5.2] | 3.52 | 10,900 [3.2] | 2.48 | 17,600 [5.2] | 10,900 [3.2] | 9.10 | |
| | | | 2 | RGGE-06?MCK? | 17,450 [5.1] | 6,150 [1.8] | 24,200 [7.1] | 17.00 | 13.00 | 775 [366] | 74 | 26,600 [7.8] | 3.70 | 17,500 [5.1] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 1 | RGJF-06?MCK? | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 13.00 | 625 [295] | 71 | 17,100 [5.0] | 3.70 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RGLE-07?AMK? | 18,050 [5.3] | 6,150 [1.8] | 24,000 [7.0] | 17.00 | 13.00 | 825 [389] | 74 | 26,200 [7.7] | 3.74 | 17,000 [5.0] | 2.62 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 1 | RGPE-05?BMK? | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 16.50 | 12.90 | 575 [271] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |
| | | | 2 | RCFM-H*2417 | 17,850 [5.2] | 6,150 [1.8] | 24,000 [7.0] | 16.50 | 12.90 | 800 [378] | 74 | 26,200 [7.7] | 3.72 | 17,000 [5.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | |
|-----------------------|---------------|--------------|--------------|--|--------------------------|-------------------|--------------|-----------------------------|-----------------------|--|--|--------------|-----------------------------------|--|--------------|--------------------------|--------------|------|
| | ID Coil | ID Air Mover | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | AHRI Ratings | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | | |
| | | | | | | Total Capacity | SEER | | | | EER | BTU/H [kW] | | COP | BTU/H [kW] | | COP | |
| Rev. 6/30/10 | RCFM-H*2417 | RGPE-07?AMK? | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,400 [7.1] | 17.00 | 13.10 | 625 [295] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | |
| | | | 2 | 18,100 [5.3] | 6,300 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | |
| | | RGTM-06?MAE? | 1 | 11,550 [3.4] | 7,550 [2.2] | 24,200 [7.1] | 16.50 | 12.85 | 750 [354] | 71 | 17,200 [5.0] | 3.68 | 10,500 [3.1] | 2.58 | 17,200 [5.0] | 10,500 [3.1] | 9.60 | |
| | | | 2 | 18,000 [5.3] | 6,200 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | |
| | 024JEZ | RCFM-H*2421 | RGGE-06?MCK? | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 13.05 | 625 [295] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 |
| | | | | 2 | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | |
| | | | RGJF-06?MCK? | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,200 [7.1] | 17.00 | 13.05 | 625 [295] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 |
| | | | | 2 | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | |
| RGLE-07?AMK? | | 1 | 11,250 [3.3] | 7,350 [2.2] | 24,000 [7.0] | 17.00 | 13.05 | 600 [283] | 71 | 17,000 [5.0] | 3.74 | 10,300 [3.0] | 2.62 | 17,000 [5.0] | 10,300 [3.0] | 9.80 | | |
| | | 2 | 17,900 [5.2] | 6,100 [1.8] | | | | 800 [378] | 74 | 26,000 [7.6] | | 16,900 [5.0] | | 16,900 [5.0] | | | | |
| RGPE-05?BMK? | | 1 | 11,050 [3.2] | 7,250 [2.1] | 24,000 [7.0] | 16.50 | 12.90 | 575 [271] | 71 | 17,100 [5.0] | 3.72 | 10,300 [3.0] | 2.60 | 17,100 [5.0] | 10,300 [3.0] | 9.75 | | |
| | | 2 | 17,850 [5.2] | 6,150 [1.8] | | | | 800 [378] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | |
| 036JEZ | RCFM-H*2421 | RGPE-07?AMK? | 1 | 11,200 [3.3] | 7,400 [2.2] | 24,400 [7.1] | 17.00 | 13.15 | 625 [295] | 71 | 17,000 [5.0] | 3.74 | 10,300 [3.0] | 2.62 | 17,000 [5.0] | 10,300 [3.0] | 9.80 | |
| | | | 2 | 18,100 [5.3] | 6,300 [1.8] | | | | 825 [389] | 74 | 26,000 [7.6] | | 17,000 [5.0] | | 17,000 [5.0] | | | |
| | | RGTM-06?MAE? | 1 | 11,550 [3.4] | 7,550 [2.2] | 24,200 [7.1] | 17.00 | 12.90 | 750 [354] | 71 | 17,200 [5.0] | 3.70 | 10,400 [3.0] | 2.60 | 17,200 [5.0] | 10,400 [3.0] | 9.60 | |
| | | | 2 | 18,050 [5.3] | 6,150 [1.8] | | | | 825 [389] | 74 | 26,200 [7.7] | | 17,100 [5.0] | | 17,100 [5.0] | | | |
| | ROCA-070E03 | 1 | 10,900 [3.2] | 7,700 [2.3] | 24,000 [7.0] | 16.50 | 13.05 | 600 [283] | 71 | 17,000 [5.0] | 3.74 | 10,300 [3.0] | 2.62 | 17,000 [5.0] | 10,300 [3.0] | 9.80 | | |
| | | 2 | 17,600 [5.2] | 6,400 [1.9] | | | | 800 [378] | 74 | 26,000 [7.6] | | 16,900 [5.0] | | 16,900 [5.0] | | | | |
| | ROLA-070E03 | 1 | 10,900 [3.2] | 7,600 [2.2] | 24,000 [7.0] | 16.50 | 13.00 | 600 [283] | 71 | 17,100 [5.0] | 3.74 | 10,300 [3.0] | 2.62 | 17,100 [5.0] | 10,300 [3.0] | 9.70 | | |
| | | 2 | 17,600 [5.2] | 6,400 [1.9] | | | | 800 [378] | 74 | 26,000 [7.6] | | 16,900 [5.0] | | 16,900 [5.0] | | | | |
| RHPL-HM2421 | 1 | 14,500 [4.2] | 4,100 [1.2] | 24,000 [7.0] | 17.00 | 13.05 | 625 [295] | 71 | 17,200 [5.0] | 3.54 | 10,400 [3.0] | 2.54 | 17,200 [5.0] | 10,400 [3.0] | 9.05 | | | |
| | 2 | 17,850 [5.2] | 6,150 [1.8] | | | | 775 [366] | 74 | 26,200 [7.7] | | 17,000 [5.0] | | 17,000 [5.0] | | | | | |
| 036JEZ | RCFL-H*3617 | RGFD-06?MCK? | 1 | 13,850 [4.1] | 11,550 [3.4] | 34,600 [10.1] | 15.00 | 11.45 | 875 [413] | 71 | 24,400 [7.1] | 3.14 | 15,600 [4.6] | 2.18 | 24,400 [7.1] | 15,600 [4.6] | 8.65 | |
| | | | 2 | 25,050 [7.3] | 9,550 [2.8] | | | | 1175 [554] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 20,800 [6.1] | | | |
| | | RGFD-07?MCK? | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,400 [10.1] | 15.00 | 11.30 | 900 [425] | 71 | 24,400 [7.1] | 3.14 | 15,600 [4.6] | 2.18 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | |
| | | | 2 | 25,000 [7.3] | 9,400 [2.8] | | | | 1200 [566] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 20,800 [6.1] | | | |
| | RGFE-06?MCK? | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,600 [10.1] | 15.50 | 11.50 | 875 [413] | 71 | 24,400 [7.1] | 3.16 | 15,500 [4.5] | 2.20 | 24,400 [7.1] | 15,500 [4.5] | 8.70 | | |
| | | 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1200 [566] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | 20,600 [6.0] | | | | |
| | RGFE-07?MCK? | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,400 [10.1] | 15.00 | 11.25 | 875 [413] | 71 | 24,400 [7.1] | 3.12 | 15,600 [4.6] | 2.18 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | |
| | | 2 | 25,000 [7.3] | 9,400 [2.8] | | | | 1225 [578] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 20,800 [6.1] | | | | |
| RGGD-06?MCK? | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,600 [10.1] | 15.50 | 11.50 | 900 [425] | 71 | 24,400 [7.1] | 3.16 | 15,500 [4.5] | 2.20 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | |
| | 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | 20,600 [6.0] | | | | | |
| RGGD-07?MCK? | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,400 [10.1] | 15.00 | 11.35 | 925 [437] | 71 | 24,400 [7.1] | 3.14 | 15,600 [4.6] | 2.18 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |
| | 2 | 25,050 [7.3] | 9,350 [2.7] | | | | 1225 [578] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 20,800 [6.1] | | | | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | | | |
|-----------------------|---------------|--|-------|--|--------------|----------------------------|--------------------------|-------------------|------------|---|-----------------------|--|--------------|--|--------------|--------------------------|------|------------|-----|------------|
| | | | | ID Coil | ID Air Mover | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | AHRI Ratings | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | COP | BTU/H [kW] | COP | BTU/H [kW] |
| | | | | | | | | Total Capacity | SEER | | | EER | BTU/H [kW] | COP | BTU/H [kW] | | | | | |
| Rev. 6/30/10 | RGGE-06?MCK? | | 1 | 14,050 [4.1] | 11,750 [3.4] | 34,800 [10.2] | 15.50 | 11.75 | 925 [437] | 71 | 24,400 [7.1] | 3.20 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | | | 2 | 25,250 [7.4] | 9,550 [2.8] | | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | |
| | RGGE-07?MCK? | | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,800 [10.2] | 15.50 | 11.70 | 875 [413] | 71 | 24,400 [7.1] | 3.18 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | |
| | | | 2 | 25,200 [7.4] | 9,600 [2.8] | | | | 1200 [566] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | |
| Rev. 6/30/10 | RGJD-06?MCK? | | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,600 [10.1] | 15.50 | 11.50 | 900 [425] | 71 | 24,400 [7.1] | 3.16 | 15,500 [4.5] | 2.20 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | |
| | | | 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | |
| | RGJD-07?MCK? | | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,400 [10.1] | 15.00 | 11.35 | 925 [437] | 71 | 24,400 [7.1] | 3.14 | 15,600 [4.6] | 2.18 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |
| | | | 2 | 25,050 [7.3] | 9,350 [2.7] | | | | 1225 [578] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |
| Rev. 6/30/10 | RGJF-06?MCK? | | 1 | 14,050 [4.1] | 11,750 [3.4] | 34,800 [10.2] | 15.50 | 11.75 | 925 [437] | 71 | 24,400 [7.1] | 3.20 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | | | 2 | 25,250 [7.4] | 9,550 [2.8] | | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | RGJF-07?MCK? | | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,800 [10.2] | 15.50 | 11.70 | 875 [413] | 71 | 24,400 [7.1] | 3.18 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | |
| | | | 2 | 25,200 [7.4] | 9,600 [2.8] | | | | 1200 [566] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | |
| Rev. 6/30/10 | RGLF-07?MCK? | | 1 | 13,950 [4.1] | 11,650 [3.4] | 35,000 [10.3] | 15.50 | 12.00 | 875 [413] | 71 | 24,200 [7.1] | 3.24 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | | 2 | 25,350 [7.4] | 9,650 [2.8] | | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | RGLR-07?MCK? | | 1 | 13,950 [4.1] | 11,650 [3.4] | 34,800 [10.2] | 16.00 | 11.95 | 925 [437] | 71 | 24,200 [7.1] | 3.22 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | | 2 | 25,300 [7.4] | 9,500 [2.8] | | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| Rev. 6/30/10 | RGPE-05?BMK? | | 1 | 13,950 [4.1] | 11,450 [3.4] | 34,800 [10.2] | 15.50 | 11.75 | 900 [425] | 71 | 24,400 [7.1] | 3.20 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | | | 2 | 25,250 [7.4] | 9,550 [2.8] | | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,600 [6.0] | | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | RGPE-07?AMK? | | 1 | 13,950 [4.1] | 11,650 [3.4] | 34,800 [10.2] | 15.50 | 11.80 | 900 [425] | 71 | 24,200 [7.1] | 3.20 | 15,400 [4.5] | 2.22 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | | 2 | 25,250 [7.4] | 9,550 [2.8] | | | | 1225 [578] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| Rev. 6/30/10 | RGPR-05?BMK? | | 1 | 13,850 [4.1] | 11,550 [3.4] | 34,600 [10.1] | 15.00 | 11.45 | 900 [425] | 71 | 24,400 [7.1] | 3.16 | 15,600 [4.6] | 2.20 | 24,400 [7.1] | 15,600 [4.6] | 8.65 | | | |
| | | | 2 | 25,050 [7.3] | 9,550 [2.8] | | | | 1200 [566] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 24,400 [7.1] | 15,600 [4.6] | 8.65 | | | |
| | RGRM-04?MAE? | | 1 | 13,850 [4.1] | 11,550 [3.4] | 34,600 [10.1] | 15.00 | 11.45 | 925 [437] | 71 | 24,600 [7.2] | 3.14 | 15,700 [4.6] | 2.18 | 24,600 [7.2] | 15,700 [4.6] | 8.65 | | | |
| | | | 2 | 25,050 [7.3] | 9,550 [2.8] | | | | 1200 [566] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 24,600 [7.2] | 15,700 [4.6] | 8.65 | | | |
| Rev. 6/30/10 | RGRM-06?MAE? | | 1 | 13,850 [4.1] | 11,550 [3.4] | 34,600 [10.1] | 15.00 | 11.55 | 900 [425] | 71 | 24,400 [7.1] | 3.14 | 15,600 [4.6] | 2.18 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |
| | | | 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1175 [554] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |
| | RGRM-07?MAE? | | 1 | 13,750 [4.0] | 11,450 [3.4] | 34,200 [10.0] | 14.50 | 11.05 | 950 [448] | 71 | 24,600 [7.2] | 3.08 | 15,800 [4.6] | 2.14 | 24,600 [7.2] | 15,800 [4.6] | 8.55 | | | |
| | | | 2 | 24,900 [7.3] | 9,300 [2.7] | | | | 1225 [578] | 72 | 33,000 [9.7] | | 21,000 [6.2] | | 24,600 [7.2] | 15,800 [4.6] | 8.55 | | | |
| Rev. 6/30/10 | RGTM-06?MAE? | | 1 | 14,350 [4.2] | 11,850 [3.5] | 34,600 [10.1] | 15.00 | 11.45 | 1075 [507] | 71 | 24,600 [7.2] | 3.16 | 15,800 [4.6] | 2.20 | 24,600 [7.2] | 15,800 [4.6] | 8.60 | | | |
| | | | 2 | 25,050 [7.3] | 9,550 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | | 20,800 [6.1] | | 24,600 [7.2] | 15,800 [4.6] | 8.60 | | | |
| | Coil Only | | 1 | 18,150 [5.3] | 6,450 [1.9] | 34,200 [10.0] | 14.00 | 11.85 | 875 [413] | 71 | 24,800 [7.3] | 3.20 | 16,000 [4.7] | 2.22 | 24,800 [7.3] | 16,000 [4.7] | 8.55 | | | |
| | | | 2 | 24,700 [7.2] | 9,500 [2.8] | | | | 1070 [505] | 72 | 31,800 [9.3] | | 20,200 [5.9] | | 24,800 [7.3] | 16,000 [4.7] | 8.55 | | | |
| Rev. 6/30/10 | RCFL-H*3621 | | 1 | 13,850 [4.1] | 11,550 [3.4] | 34,600 [10.1] | 15.00 | 11.50 | 875 [413] | 71 | 24,400 [7.1] | 3.16 | 15,600 [4.6] | 2.20 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |
| | | | 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1175 [554] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | | | |
|-----------------------|---------------|--------------|---------------|--|--------------------------|-------------------|-----------------------------|-----------------------|--|---|--|--------------|-----------------------------------|--------------|---------------------------------------|--------------------------|--------------|------------|-----|--|
| | | | | AHRI Ratings | | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | | | |
| | | | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | Total Capacity | | | SEER | EER | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | | COP | BTU/H [kW] | COP | |
| Rev. 6/30/10 | | ID Coil | ID Air Mover | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,400 [10.1] | 15.00 | 11.40 | 900 [425] | 71 | 24,400 [7.1] | 3.14 | 15,600 [4.6] | 2.18 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | |
| | | | | 2 | 25,050 [7.3] | 9,350 [2.7] | | | | 1200 [566] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | | | | | |
| | | | | 1 | 14,000 [4.1] | 11,600 [3.4] | 34,800 [10.2] | 16.00 | 12.25 | 850 [401] | 71 | 24,200 [7.1] | 3.28 | 15,300 [4.5] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.05 | | |
| | | | | 2 | 25,300 [7.4] | 9,500 [2.8] | | | | 1150 [543] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | | | | | |
| | | | | 1 | 14,000 [4.1] | 11,600 [3.4] | 35,000 [10.3] | 16.00 | 12.15 | 850 [401] | 71 | 24,200 [7.1] | 3.26 | 15,300 [4.5] | 2.26 | 24,200 [7.1] | 15,300 [4.5] | 9.00 | | |
| | | | | 2 | 25,400 [7.4] | 9,600 [2.8] | | | | 1175 [554] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | | | | | |
| | | | | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,600 [10.1] | 15.50 | 11.55 | 875 [413] | 71 | 24,400 [7.1] | 3.16 | 15,500 [4.5] | 2.20 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | |
| | | | | 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1200 [566] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | | | | | |
| | | | | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,400 [10.1] | 15.50 | 11.30 | 875 [413] | 71 | 24,400 [7.1] | 3.14 | 15,500 [4.5] | 2.18 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | |
| | | | | 2 | 25,000 [7.3] | 9,400 [2.8] | | | | 1225 [578] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | | | | | |
| | | | | 1 | 14,000 [4.1] | 11,600 [3.4] | 35,000 [10.3] | 16.00 | 12.10 | 875 [413] | 71 | 24,200 [7.1] | 3.24 | 15,300 [4.5] | 2.26 | 24,200 [7.1] | 15,300 [4.5] | 9.00 | | |
| | | | | 2 | 25,400 [7.4] | 9,600 [2.8] | | | | 1200 [566] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | | | | | |
| | | | | 1 | 14,000 [4.1] | 11,600 [3.4] | 34,800 [10.2] | 16.00 | 11.95 | 900 [425] | 71 | 24,200 [7.1] | 3.24 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | |
| | | | | 2 | 25,300 [7.4] | 9,500 [2.8] | | | | 1225 [578] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | | | | | |
| 1 | 13,950 [4.1] | 11,450 [3.4] | 34,600 [10.1] | 15.50 | 11.55 | 900 [425] | 71 | 24,400 [7.1] | 3.16 | 15,500 [4.5] | 2.20 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | | | | |
| 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | | | | | | | | | |
| 1 | 13,900 [4.1] | 11,500 [3.4] | 34,600 [10.1] | 15.00 | 11.45 | 925 [437] | 71 | 24,400 [7.1] | 3.16 | 15,500 [4.5] | 2.20 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | | | | |
| 2 | 25,050 [7.3] | 9,550 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | | 20,800 [6.1] | | | | | | | | | | |
| 1 | 14,050 [4.1] | 11,750 [3.4] | 35,200 [10.3] | 16.50 | 12.30 | 800 [378] | 71 | 24,200 [7.1] | 3.28 | 15,200 [4.5] | 2.26 | 24,200 [7.1] | 15,200 [4.5] | 9.10 | | | | | | |
| 2 | 25,500 [7.5] | 9,700 [2.8] | | | | 1175 [554] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | | | | | | | | | |
| 1 | 14,050 [4.1] | 11,750 [3.4] | 35,200 [10.3] | 16.00 | 12.35 | 825 [389] | 71 | 24,200 [7.1] | 3.28 | 15,300 [4.5] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.10 | | | | | | |
| 2 | 25,500 [7.5] | 9,700 [2.8] | | | | 1175 [554] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | | | | | | | | | |
| 1 | 14,100 [4.1] | 11,700 [3.4] | 34,800 [10.2] | 15.50 | 11.85 | 925 [437] | 71 | 24,400 [7.1] | 3.22 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.95 | | | | | | |
| 2 | 25,250 [7.4] | 9,550 [2.8] | | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | | | | | | | | | |
| 1 | 13,950 [4.1] | 11,450 [3.4] | 34,800 [10.2] | 15.50 | 11.75 | 875 [413] | 71 | 24,400 [7.1] | 3.20 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | | | | |
| 2 | 25,250 [7.4] | 9,550 [2.8] | | | | 1200 [566] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | | | | | | | | | |
| 1 | 14,000 [4.1] | 11,600 [3.4] | 35,000 [10.3] | 16.00 | 12.20 | 875 [413] | 71 | 24,200 [7.1] | 3.26 | 15,300 [4.5] | 2.26 | 24,200 [7.1] | 15,300 [4.5] | 9.00 | | | | | | |
| 2 | 25,450 [7.5] | 9,550 [2.8] | | | | 1225 [578] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | | | | | | | | | |
| 1 | 14,000 [4.1] | 11,600 [3.4] | 35,000 [10.3] | 16.00 | 12.10 | 875 [413] | 71 | 24,200 [7.1] | 3.26 | 15,400 [4.5] | 2.26 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | | | | |
| 2 | 25,400 [7.4] | 9,600 [2.8] | | | | 1200 [566] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | | | | | | | | | |
| 1 | 13,950 [4.1] | 11,450 [3.4] | 34,600 [10.1] | 15.50 | 11.55 | 900 [425] | 71 | 24,400 [7.1] | 3.16 | 15,500 [4.5] | 2.20 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | | | | |
| 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | | | | | | | | | |
| 1 | 13,900 [4.1] | 11,500 [3.4] | 34,600 [10.1] | 15.00 | 11.45 | 925 [437] | 71 | 24,400 [7.1] | 3.16 | 15,500 [4.5] | 2.20 | 24,400 [7.1] | 15,500 [4.5] | 8.75 | | | | | | |
| 2 | 25,050 [7.3] | 9,550 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | | 20,800 [6.1] | | | | | | | | | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPR-L | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | |
|-----------------------|---------------|--|-------|--|--------------|-------------------|---------------|-------|-----------------------|--|------------|--|------------|-----------------------------------|------------|--------------------------|---------------------------------------|------------|
| | | | | ID Coil | ID Air Mover | AHRI Ratings | | | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | |
| | | | | | | Total Capacity | SEER | EER | | Indoor Airflow CFM [L/s] | BTU/H [kW] | Net Latent BTU/H [kW] | BTU/H [kW] | COP | BTU/H [kW] | | COP | BTU/H [kW] |
| Rev. 6/30/10 | | | 1 | RGJD-097ZCM? | 14,050 [4.1] | 11,750 [3.4] | 35,200 [10.3] | 16.50 | 12.30 | 800 [378] | 71 | 24,200 [7.1] | 3.28 | 15,200 [4.5] | 2.26 | 24,200 [7.1] | 15,200 [4.5] | 9.10 |
| | | | 2 | RGJD-107ZCM? | 25,500 [7.5] | 9,700 [2.8] | 35,200 [10.3] | 16.00 | 12.35 | 1175 [554] | 72 | 32,200 [9.4] | 3.28 | 20,200 [5.9] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.10 |
| | | | 1 | RGJF-067MCK? | 14,100 [4.1] | 11,700 [3.4] | 34,800 [10.2] | 15.50 | 11.85 | 825 [389] | 71 | 24,400 [7.1] | 3.22 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.95 |
| | | | 2 | RGJF-077MCK? | 25,250 [7.4] | 9,550 [2.8] | 34,800 [10.2] | 15.50 | 11.75 | 1175 [554] | 72 | 32,400 [9.5] | 3.20 | 20,400 [6.0] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.75 |
| | | | 1 | RGJF-097ZCM? | 14,000 [4.1] | 11,600 [3.4] | 35,000 [10.3] | 16.00 | 12.20 | 875 [413] | 71 | 24,200 [7.1] | 3.26 | 15,300 [4.5] | 2.26 | 24,200 [7.1] | 15,300 [4.5] | 9.00 |
| | | | 2 | RGJF-107ZCM? | 25,450 [7.5] | 9,550 [2.8] | 35,000 [10.3] | 16.00 | 12.10 | 1225 [578] | 72 | 32,200 [9.4] | 3.26 | 20,200 [5.9] | 2.26 | 24,200 [7.1] | 15,400 [4.5] | 9.00 |
| | | | 1 | RGLE-077AMK? | 14,000 [4.1] | 11,600 [3.4] | 35,000 [10.3] | 16.00 | 12.05 | 875 [413] | 71 | 24,200 [7.1] | 3.24 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 |
| | | | 2 | RGLE-077BRQ? | 25,350 [7.4] | 9,650 [2.8] | 35,200 [10.3] | 16.00 | 12.35 | 1200 [566] | 72 | 32,200 [9.4] | 3.28 | 20,400 [6.0] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.05 |
| 036JEZ | | | 1 | RGLE-107BRM? | 14,050 [4.1] | 11,750 [3.4] | 35,200 [10.3] | 16.50 | 12.60 | 925 [437] | 71 | 24,200 [7.1] | 3.32 | 15,200 [4.5] | 2.30 | 24,000 [7.0] | 15,200 [4.5] | 9.10 |
| | | | 2 | RGLR-077AMK? | 25,600 [7.5] | 9,600 [2.8] | 35,000 [10.3] | 16.00 | 12.00 | 1200 [566] | 72 | 32,000 [9.4] | 3.24 | 20,000 [5.9] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 |
| | | | 1 | RGLR-077BRQ? | 14,050 [4.1] | 11,550 [3.4] | 35,200 [10.3] | 16.00 | 12.40 | 925 [437] | 71 | 24,200 [7.1] | 3.30 | 15,300 [4.5] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.05 |
| | | | 2 | RGLR-107BRM? | 25,550 [7.5] | 9,650 [2.8] | 35,200 [10.3] | 16.00 | 12.50 | 1225 [578] | 72 | 32,000 [9.4] | 3.30 | 20,000 [5.9] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.05 |
| | | | 1 | RGPE-057BMK? | 13,950 [4.1] | 11,650 [3.4] | 34,800 [10.2] | 15.50 | 11.80 | 900 [425] | 71 | 24,400 [7.1] | 3.20 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.95 |
| | | | 2 | RGPE-077AMK? | 25,250 [7.4] | 9,550 [2.8] | 34,800 [10.2] | 15.50 | 11.85 | 1200 [566] | 72 | 32,400 [9.5] | 3.22 | 20,400 [6.0] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 |
| | | | 1 | RGPE-077BRQ? | 14,050 [4.1] | 11,550 [3.4] | 35,200 [10.3] | 16.00 | 12.45 | 900 [425] | 71 | 24,200 [7.1] | 3.30 | 15,300 [4.5] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.05 |
| | | | 2 | RGPR-057BMK? | 25,550 [7.5] | 9,650 [2.8] | 35,200 [10.3] | 16.00 | 12.45 | 1225 [578] | 72 | 32,000 [9.4] | 3.30 | 20,000 [5.9] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.10 |
| | | | 1 | | 13,850 [4.1] | 11,550 [3.4] | 34,600 [10.1] | 15.00 | 11.50 | 900 [425] | 71 | 24,400 [7.1] | 3.16 | 15,600 [4.6] | 2.20 | 24,400 [7.1] | 15,600 [4.6] | 8.70 |
| | | | 2 | | 25,100 [7.4] | 9,500 [2.8] | 34,600 [10.1] | 15.00 | 11.50 | 1200 [566] | 72 | 32,600 [9.6] | 3.16 | 20,600 [6.0] | 2.20 | 24,400 [7.1] | 15,600 [4.6] | 8.70 |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF |
|-----------------------|---------------|---------|--------------|--|--------------------------|-------------------|------------|----------------|--------------|-----------------------|--|--------------|--|---|-----------------------------------|--------------|---------------------------------------|--------------|------|--------------------------|
| | | | | AHRI Ratings | | | | Indoor Airflow | | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | |
| | | | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | Total Capacity | SEER | EER | CFM [L/s] | | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | COP | | |
| Rev. 6/30/10 | RGRPR-07?AMK? | ID Coil | 1 | 13,950 [4.1] | 11,650 [3.4] | 34,800 [10.2] | 15.50 | 11.95 | 900 [425] | 71 | 24,200 [7.1] | 3.22 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | | | 25,350 [7.4] | 9,450 [2.8] | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,200 [7.1] | | 15,300 [4.5] | 2.28 | 15,300 [4.5] | 9.10 | |
| | RGRPR-07?BRQ? | ID Coil | 1 | 14,050 [4.1] | 11,750 [3.4] | 35,200 [10.3] | 16.50 | 12.50 | 875 [413] | 71 | 24,200 [7.1] | 3.30 | 15,300 [4.5] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.10 | | | |
| | | | | 25,550 [7.5] | 9,650 [2.8] | | | 1200 [566] | 72 | 32,000 [9.4] | | 20,000 [5.9] | | 24,200 [7.1] | | 15,400 [4.5] | 2.26 | 15,400 [4.5] | 9.00 | |
| | RGRPR-10?BRM? | ID Coil | 1 | 14,000 [4.1] | 11,600 [3.4] | 35,000 [10.3] | 16.00 | 12.25 | 925 [437] | 71 | 24,200 [7.1] | 3.28 | 15,400 [4.5] | 2.26 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | | | 25,450 [7.5] | 9,550 [2.8] | | | 1225 [578] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | 24,400 [7.1] | | 15,600 [4.6] | 2.18 | 15,600 [4.6] | 8.70 | |
| | RGRM-04?MAE? | ID Coil | 1 | 13,850 [4.1] | 11,550 [3.4] | 34,600 [10.1] | 15.00 | 11.45 | 925 [437] | 71 | 24,400 [7.1] | 3.14 | 15,600 [4.6] | 2.18 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |
| | | | | 25,100 [7.4] | 9,500 [2.8] | | | 1200 [566] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 24,400 [7.1] | | 15,600 [4.6] | 2.20 | 15,600 [4.6] | 8.70 | |
| | RGRM-06?MAE? | ID Coil | 1 | 13,850 [4.1] | 11,550 [3.4] | 34,600 [10.1] | 15.00 | 11.55 | 900 [425] | 71 | 24,400 [7.1] | 3.16 | 15,600 [4.6] | 2.20 | 24,400 [7.1] | 15,600 [4.6] | 8.70 | | | |
| | | | | 25,100 [7.4] | 9,500 [2.8] | | | 1175 [554] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 24,600 [7.2] | | 15,800 [4.6] | 2.14 | 15,800 [4.6] | 8.55 | |
| RGRM-07?MAE? | ID Coil | 1 | 13,750 [4.0] | 11,450 [3.4] | 34,200 [10.0] | 14.50 | 11.05 | 950 [448] | 71 | 24,600 [7.2] | 3.08 | 15,800 [4.6] | 2.14 | 24,600 [7.2] | 15,800 [4.6] | 8.55 | | | | |
| | | | 24,850 [7.3] | 9,350 [2.7] | | | 1225 [578] | 72 | 33,000 [9.7] | | 21,000 [6.2] | | 24,400 [7.1] | | 15,500 [4.5] | 2.18 | 15,500 [4.5] | 8.70 | | |
| RGRM-07?YBG? | ID Coil | 1 | 13,900 [4.1] | 11,500 [3.4] | 34,400 [10.1] | 15.00 | 11.25 | 850 [401] | 71 | 24,400 [7.1] | 3.12 | 15,500 [4.5] | 2.18 | 24,400 [7.1] | 15,500 [4.5] | 8.70 | | | | |
| | | | 25,000 [7.3] | 9,400 [2.8] | | | 1200 [566] | 72 | 32,800 [9.6] | | 20,800 [6.1] | | 24,600 [7.2] | | 15,800 [4.6] | 2.20 | 15,800 [4.6] | 8.60 | | |
| RGTM-06?MAE? | ID Coil | 1 | 14,350 [4.2] | 11,850 [3.5] | 34,600 [10.1] | 15.00 | 11.50 | 1075 [507] | 71 | 24,600 [7.2] | 3.16 | 15,800 [4.6] | 2.20 | 24,600 [7.2] | 15,800 [4.6] | 8.60 | | | | |
| | | | 25,100 [7.4] | 9,500 [2.8] | | | 1225 [578] | 72 | 32,600 [9.6] | | 20,600 [6.0] | | 24,200 [7.1] | | 15,400 [4.5] | 2.24 | 15,400 [4.5] | 8.95 | | |
| RGTM-07?RBG? | ID Coil | 1 | 14,200 [4.2] | 11,800 [3.5] | 35,400 [10.4] | 16.00 | 12.20 | 950 [448] | 71 | 24,200 [7.1] | 3.24 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | | |
| | | | 25,650 [7.5] | 9,750 [2.9] | | | 1275 [602] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | 24,200 [7.1] | | 15,400 [4.5] | 2.26 | 15,400 [4.5] | 8.95 | | |
| RGTM-09?ZAJ? | ID Coil | 1 | 14,250 [4.2] | 11,750 [3.4] | 35,000 [10.3] | 16.00 | 12.15 | 975 [460] | 71 | 24,200 [7.1] | 3.26 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | | |
| | | | 25,400 [7.4] | 9,600 [2.8] | | | 1225 [578] | 72 | 32,200 [9.4] | | 20,200 [5.9] | | 24,400 [7.1] | | 15,500 [4.5] | 2.24 | 15,500 [4.5] | 8.90 | | |
| ROCA-070E03 | ID Coil | 1 | 13,600 [4.0] | 12,400 [3.6] | 35,000 [10.3] | 15.00 | 12.00 | 1000 [472] | 71 | 24,400 [7.1] | 3.24 | 15,500 [4.5] | 2.24 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | | |
| | | | 25,200 [7.4] | 9,800 [2.9] | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,400 [7.1] | | 15,500 [4.5] | 2.24 | 15,500 [4.5] | 9.00 | | |
| ROCA-070E04 | ID Coil | 1 | 13,600 [4.0] | 12,400 [3.6] | 35,000 [10.3] | 15.00 | 12.00 | 1000 [472] | 71 | 24,400 [7.1] | 3.24 | 15,500 [4.5] | 2.24 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | | |
| | | | 25,200 [7.4] | 9,800 [2.9] | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,400 [7.1] | | 15,500 [4.5] | 2.24 | 15,500 [4.5] | 9.00 | | |
| ROLA-070E03 | ID Coil | 1 | 13,600 [4.0] | 12,000 [3.5] | 35,200 [10.3] | 15.50 | 12.35 | 900 [425] | 71 | 24,200 [7.1] | 3.28 | 15,400 [4.5] | 2.28 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | | |
| | | | 25,200 [7.4] | 10,000 [2.9] | | | 1175 [554] | 72 | 32,000 [9.4] | | 20,200 [5.9] | | 24,200 [7.1] | | 15,400 [4.5] | 2.28 | 15,400 [4.5] | 9.00 | | |
| ROLA-070E04 | ID Coil | 1 | 13,600 [4.0] | 12,000 [3.5] | 35,200 [10.3] | 15.50 | 12.35 | 900 [425] | 71 | 24,200 [7.1] | 3.28 | 15,400 [4.5] | 2.28 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | | |
| | | | 25,200 [7.4] | 10,000 [2.9] | | | 1175 [554] | 72 | 32,000 [9.4] | | 20,200 [5.9] | | 24,200 [7.1] | | 15,400 [4.5] | 2.28 | 15,400 [4.5] | 9.00 | | |
| RCFL-H*3621+RXMD-C06 | Coil Only | 1 | 18,350 [5.4] | 6,450 [1.9] | 34,400 [10.1] | 14.50 | 11.70 | 875 [413] | 71 | 24,800 [7.3] | 3.16 | 16,000 [4.7] | 2.20 | 24,800 [7.3] | 16,000 [4.7] | 8.55 | | | | |
| | | | 24,800 [7.3] | 9,600 [2.8] | | | 1150 [543] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,800 [7.3] | | 16,000 [4.7] | 2.20 | 16,000 [4.7] | 8.55 | | |
| RCFM-H*3617 | ID Coil | 1 | 13,950 [4.1] | 11,650 [3.4] | 35,000 [10.3] | 15.50 | 12.00 | 875 [413] | 71 | 24,200 [7.1] | 3.24 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | | |
| | | | 25,350 [7.4] | 9,650 [2.8] | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,400 [6.0] | | 24,200 [7.1] | | 15,400 [4.5] | 2.22 | 15,400 [4.5] | 8.90 | | |
| RGPE-05?BMK? | ID Coil | 1 | 13,950 [4.1] | 11,450 [3.4] | 34,800 [10.2] | 15.50 | 11.75 | 900 [425] | 71 | 24,400 [7.1] | 3.20 | 15,500 [4.5] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | | |
| | | | 25,250 [7.4] | 9,550 [2.8] | | | 1200 [566] | 72 | 32,400 [9.5] | | 20,600 [6.0] | | 24,400 [7.1] | | 15,500 [4.5] | 2.22 | 15,500 [4.5] | 8.90 | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPR-L | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | | | |
|-----------------------|---------------|--------------|-------|--|--------------|----------------------------|--------------------------|-------------------|------------|---|-----------------------|--|--------------|--|--------------|--------------------------|------|------------|-----|------------|
| | | | | ID Coil | ID Air Mover | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | AHRI Ratings | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | COP | BTU/H [kW] | COP | BTU/H [kW] |
| | | | | | | | | Total Capacity | SEER | | | EER | BTU/H [kW] | COP | BTU/H [kW] | | | | | |
| Rev. 6/30/10 | RCFM-H*3617 | RGPE-07?AMK? | 1 | 13,950 [4.1] | 11,650 [3.4] | 34,800 [10.2] | 15.50 | 11.80 | 900 [425] | 71 | 24,200 [7.1] | 3.20 | 15,400 [4.5] | 2.22 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | | 2 | 25,250 [7.4] | 9,550 [2.8] | | | | 1225 [578] | 72 | 32,400 [9.5] | 3.16 | 20,400 [6.0] | 2.20 | 24,600 [7.2] | 15,800 [4.6] | 8.60 | | | |
| | | RGTM-06?MAE? | 1 | 14,350 [4.2] | 11,850 [3.5] | 34,600 [10.1] | 15.00 | 11.45 | 1075 [507] | 71 | 24,600 [7.2] | 3.24 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | | 2 | 25,050 [7.3] | 9,550 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | 3.28 | 20,000 [5.9] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.05 | | | |
| | | RGL-07?BRQ? | 1 | 14,000 [4.1] | 11,600 [3.4] | 35,000 [10.3] | 16.00 | 12.05 | 875 [413] | 71 | 24,200 [7.1] | 3.32 | 15,200 [4.5] | 2.30 | 24,000 [7.0] | 15,200 [4.5] | 9.10 | | | |
| | | | 2 | 25,350 [7.4] | 9,650 [2.8] | | | | 1225 [578] | 72 | 32,000 [9.4] | 3.20 | 20,400 [6.0] | 2.22 | 24,400 [7.1] | 15,500 [4.5] | 8.95 | | | |
| | | RGL-10?BRM? | 1 | 14,050 [4.1] | 11,750 [3.4] | 35,200 [10.3] | 16.50 | 12.60 | 875 [413] | 71 | 24,000 [7.0] | 3.22 | 15,400 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | | 2 | 25,600 [7.5] | 9,600 [2.8] | | | | 1200 [566] | 72 | 32,000 [9.4] | 3.30 | 20,000 [5.9] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.05 | | | |
| | | RGPE-05?BMK? | 1 | 13,950 [4.1] | 11,650 [3.4] | 34,800 [10.2] | 15.50 | 11.80 | 900 [425] | 71 | 24,400 [7.1] | 3.20 | 15,500 [4.5] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | | 2 | 25,250 [7.4] | 9,550 [2.8] | | | | 1225 [578] | 72 | 32,400 [9.5] | 3.30 | 20,000 [5.9] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.05 | | | |
| 036JEZ | RCFM-H*3621 | RGPE-07?AMK? | 1 | 14,050 [4.1] | 11,550 [3.4] | 35,200 [10.3] | 16.00 | 12.45 | 900 [425] | 71 | 24,200 [7.1] | 3.30 | 15,300 [4.5] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.10 | | | |
| | | | 2 | 25,550 [7.5] | 9,650 [2.8] | | | | 1225 [578] | 72 | 32,000 [9.4] | 3.22 | 20,400 [6.0] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | RGPE-07?BRQ? | 1 | 14,050 [4.1] | 11,550 [3.4] | 35,200 [10.3] | 16.00 | 12.50 | 900 [425] | 71 | 24,200 [7.1] | 3.30 | 15,300 [4.5] | 2.28 | 24,200 [7.1] | 15,300 [4.5] | 9.10 | | | |
| | | | 2 | 25,550 [7.5] | 9,650 [2.8] | | | | 1225 [578] | 72 | 32,000 [9.4] | 3.22 | 20,400 [6.0] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | RGTM-06?MAE? | 1 | 14,350 [4.2] | 11,850 [3.5] | 34,600 [10.1] | 15.00 | 11.50 | 1075 [507] | 71 | 24,600 [7.2] | 3.16 | 15,800 [4.6] | 2.20 | 24,600 [7.2] | 15,800 [4.6] | 8.60 | | | |
| | | | 2 | 25,100 [7.4] | 9,500 [2.8] | | | | 1225 [578] | 72 | 32,600 [9.6] | 3.24 | 20,600 [6.0] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | RGTM-07?RBG? | 1 | 14,200 [4.2] | 11,800 [3.5] | 35,400 [10.4] | 16.00 | 12.20 | 950 [448] | 71 | 24,200 [7.1] | 3.26 | 15,400 [4.5] | 2.26 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | | 2 | 25,650 [7.5] | 9,750 [2.9] | | | | 1275 [602] | 72 | 32,200 [9.4] | 3.26 | 20,200 [5.9] | 2.24 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | RGTM-09?ZAJ? | 1 | 14,250 [4.2] | 11,750 [3.4] | 35,000 [10.3] | 16.00 | 12.15 | 975 [460] | 71 | 24,200 [7.1] | 3.26 | 15,400 [4.5] | 2.26 | 24,200 [7.1] | 15,400 [4.5] | 8.95 | | | |
| | | | 2 | 25,400 [7.4] | 9,600 [2.8] | | | | 1225 [578] | 72 | 32,200 [9.4] | 3.24 | 20,200 [5.9] | 2.24 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | | ROCA-070E03 | 1 | 13,600 [4.0] | 12,400 [3.6] | 35,000 [10.3] | 15.00 | 12.00 | 1000 [472] | 71 | 24,400 [7.1] | 3.24 | 15,500 [4.5] | 2.24 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | | | 2 | 25,200 [7.4] | 9,800 [2.9] | | | | 1200 [566] | 72 | 32,400 [9.5] | 3.24 | 20,400 [6.0] | 2.24 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | | ROCA-070E04 | 1 | 13,600 [4.0] | 12,400 [3.6] | 35,000 [10.3] | 15.00 | 12.00 | 1000 [472] | 71 | 24,400 [7.1] | 3.24 | 15,500 [4.5] | 2.24 | 24,400 [7.1] | 15,500 [4.5] | 8.90 | | | |
| | | | 2 | 25,200 [7.4] | 9,800 [2.9] | | | | 1200 [566] | 72 | 32,400 [9.5] | 3.28 | 20,400 [6.0] | 2.28 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | ROLA-070E03 | 1 | 13,600 [4.0] | 12,000 [3.5] | 35,200 [10.3] | 15.50 | 12.35 | 900 [425] | 71 | 24,200 [7.1] | 3.28 | 15,400 [4.5] | 2.28 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | | 2 | 25,200 [7.4] | 10,000 [2.9] | | | | 1175 [554] | 72 | 32,000 [9.4] | 3.28 | 20,200 [5.9] | 2.28 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | ROLA-070E04 | 1 | 13,600 [4.0] | 12,000 [3.5] | 35,200 [10.3] | 15.50 | 12.35 | 900 [425] | 71 | 24,200 [7.1] | 3.28 | 15,400 [4.5] | 2.28 | 24,200 [7.1] | 15,400 [4.5] | 9.00 | | | |
| | | | 2 | 25,200 [7.4] | 10,000 [2.9] | | | | 1175 [554] | 72 | 32,000 [9.4] | 3.60 | 20,000 [5.9] | 2.64 | 24,200 [7.1] | 15,300 [4.5] | 9.40 | | | |
| | RCSL-H*3621 | RHPL-HM3621 | 1 | 19,350 [5.7] | 6,450 [1.9] | 85,400 [10.4] | 16.50 | 12.75 | 875 [413] | 71 | 24,200 [7.1] | 3.60 | 15,300 [4.5] | 2.64 | 24,200 [7.1] | 15,300 [4.5] | 9.40 | | | |
| | | | 2 | 25,700 [7.5] | 9,700 [2.8] | | | | 1200 [566] | 72 | 32,000 [9.4] | | 20,000 [5.9] | | | | | | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance 70°F [21°C] Indoor | | | | | | DOE Region IV HSPF | | | | | | | | | | |
|-----------------------|---------------|---------|--------------|--|--------------------------|-------------------|-----------------------------|-----------------------|--|--|------------|--|------------|--------------|-----------------------------------|--------------------------|------|---------------------------------------|------|--------------|------|--------------|------|--------------|------|--------------|
| | | | | AHRI Ratings | | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | | | | | | |
| | | | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | Total Capacity | | | SEER | EER | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | | COP | BTU/H [kW] | COP | BTU/H [kW] | COP | | | | | |
| Rev. 6/30/10 | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,000 [13.5] | 14.50 | 11.15 | 1150 [543] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 19,000 [5.6] | 2.48 | 19,000 [5.6] | 2.48 | 19,000 [5.6] | 2.48 | 19,000 [5.6] | 2.48 | 9.30 |
| | | | | 2 | 34,450 [10.1] | 11,550 [3.4] | 46,000 [13.5] | 14.50 | 11.15 | 1600 [755] | 72 | 49,000 [14.4] | 3.84 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 10.85 | 1175 [554] | 71 | 33,800 [9.9] | 3.78 | 19,100 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 19,100 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 19,100 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 9.25 |
| | | | | 2 | 34,400 [10.1] | 11,600 [3.4] | 46,000 [13.5] | 14.00 | 10.85 | 1625 [767] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 10.95 | 1200 [566] | 71 | 33,800 [9.9] | 3.80 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 9.25 |
| | | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 46,000 [13.5] | 14.00 | 10.95 | 1600 [755] | 72 | 49,000 [14.4] | 3.80 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.10 | 1225 [578] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 9.30 |
| | | | | 2 | 34,400 [10.1] | 11,600 [3.4] | 46,000 [13.5] | 14.00 | 11.10 | 1600 [755] | 72 | 49,000 [14.4] | 3.84 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] |
| 048JEZ | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.00 | 1200 [566] | 71 | 33,800 [9.9] | 3.80 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 9.25 |
| | | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 46,000 [13.5] | 14.00 | 11.00 | 1600 [755] | 72 | 49,000 [14.4] | 3.80 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] | 2.46 | 31,400 [9.2] |
| | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,000 [13.5] | 14.00 | 10.95 | 1175 [554] | 71 | 33,800 [9.9] | 3.78 | 19,000 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 19,000 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 19,000 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 9.30 |
| | | | | 2 | 34,400 [10.1] | 11,600 [3.4] | 46,000 [13.5] | 14.00 | 10.95 | 1675 [790] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] |
| | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,000 [13.5] | 14.00 | 11.10 | 1225 [578] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 9.30 |
| | | | | 2 | 34,400 [10.1] | 11,600 [3.4] | 46,000 [13.5] | 14.00 | 11.10 | 1600 [755] | 72 | 49,000 [14.4] | 3.84 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] |
| | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,000 [13.5] | 14.00 | 11.00 | 1175 [554] | 71 | 33,800 [9.9] | 3.78 | 19,000 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 19,000 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 19,000 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 9.30 |
| | | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 46,000 [13.5] | 14.00 | 11.00 | 1675 [790] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] | 2.44 | 31,400 [9.2] |
| | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,000 [13.5] | 14.50 | 11.00 | 1175 [554] | 71 | 33,800 [9.9] | 3.82 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 9.30 |
| | | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 46,000 [13.5] | 14.50 | 11.00 | 1625 [767] | 72 | 49,000 [14.4] | 3.82 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.15 | 1225 [578] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 9.30 |
| | | | | 2 | 34,450 [10.1] | 11,550 [3.4] | 46,000 [13.5] | 14.00 | 11.15 | 1600 [755] | 72 | 49,000 [14.4] | 3.84 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] | 2.48 | 31,200 [9.1] |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.00 | 1200 [566] | 71 | 33,800 [9.9] | 3.82 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 9.25 |
| | | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 46,000 [13.5] | 14.00 | 11.00 | 1600 [755] | 72 | 49,000 [14.4] | 3.82 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] | 2.46 | 31,200 [9.1] |
| | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,500 [13.6] | 14.50 | 11.35 | 1225 [578] | 71 | 33,600 [9.8] | 3.90 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 9.35 |
| | | | | 2 | 34,700 [10.2] | 11,800 [3.5] | 46,500 [13.6] | 14.50 | 11.35 | 1600 [755] | 72 | 49,000 [14.4] | 3.90 | 31,000 [9.1] | 2.50 | 31,000 [9.1] | 2.50 | 31,000 [9.1] | 2.50 | 31,000 [9.1] | 2.50 | 31,000 [9.1] | 2.50 | 31,000 [9.1] | 2.50 | 31,000 [9.1] |
| | | ID Coil | ID Air Mover | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1200 [566] | 71 | 33,600 [9.8] | 3.96 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 9.45 |
| | | | | 2 | 34,700 [10.2] | 11,800 [3.5] | 46,500 [13.6] | 14.50 | 11.65 | 1600 [755] | 72 | 48,500 [14.2] | 3.96 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] |
| | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,500 [13.6] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 9.35 |
| | | | | 2 | 34,750 [10.2] | 11,750 [3.4] | 46,500 [13.6] | 14.50 | 11.45 | 1625 [767] | 72 | 49,000 [14.4] | 3.92 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,000 [13.5] | 14.50 | 11.50 | 1200 [566] | 71 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 9.40 |
| | | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 46,000 [13.5] | 14.50 | 11.50 | 1575 [743] | 72 | 48,500 [14.2] | 3.94 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] | 2.52 | 30,800 [9.0] |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 9.35 |
| | | | | 2 | 34,750 [10.2] | 11,750 [3.4] | 46,500 [13.6] | 14.50 | 11.45 | 1600 [755] | 72 | 49,000 [14.4] | 3.92 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] | 2.50 | 30,800 [9.0] |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Rev. 6/30/10 | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance 70°F [21°C] Indoor | | | | | | DOE Region IV HSPF | | |
|-----------------------|-----------------|---------------|--------------|---------------|--|--------------------------|-------------------|---------------|-----------------------------|-----------------------|--|--------------|--|---------------|-----------------------------------|--------------|--------------------------|---------------------------------------|------------|
| | | ID Coil | ID Air Mover | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | AHRI Ratings | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | |
| | | | | | | | Total Capacity | SEER | | | EER | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | | COP | BTU/H [kW] |
| 048JEZ | RCFL-H*4821 | RGPE-107BRM? | 1 | 19,850 [5.8] | 15,150 [4.4] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 9.40 | | |
| | | | 2 | 34,750 [10.2] | 11,750 [3.4] | 14.50 | 11.55 | 1625 [767] | 72 | 49,000 [14.4] | 3.92 | 30,800 [9.0] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | | |
| | | RGPR-077BRQ? | 1 | 19,850 [5.8] | 15,150 [4.4] | 14.50 | 11.30 | 1225 [578] | 71 | 33,600 [9.8] | 3.88 | 19,000 [5.6] | 2.50 | 19,000 [5.6] | 2.42 | 19,200 [5.6] | 9.15 | | |
| | | | 2 | 34,800 [10.2] | 11,700 [3.4] | 14.50 | 10.75 | 1625 [767] | 72 | 48,500 [14.2] | 3.74 | 31,000 [9.1] | 2.42 | 34,000 [10.0] | 2.42 | 19,200 [5.6] | 9.15 | | |
| | | RGPR-107BRM? | 1 | 19,800 [5.8] | 15,200 [4.5] | 14.00 | 10.80 | 1150 [543] | 71 | 33,800 [9.9] | 3.74 | 19,100 [5.6] | 2.42 | 19,100 [5.6] | 2.46 | 19,200 [5.6] | 9.20 | | |
| | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 14.00 | 11.05 | 1600 [755] | 72 | 49,500 [14.5] | 3.82 | 31,600 [9.3] | 2.46 | 34,000 [10.0] | 2.46 | 19,200 [5.6] | 9.20 | | |
| | | RGRM-097ZAU? | 1 | 19,650 [5.8] | 14,950 [4.4] | 14.00 | 11.05 | 1250 [590] | 71 | 33,800 [9.9] | 3.82 | 19,100 [5.6] | 2.46 | 19,100 [5.6] | 2.46 | 19,100 [5.6] | 9.25 | | |
| | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 14.00 | 11.15 | 1600 [755] | 72 | 49,000 [14.4] | 3.84 | 31,200 [9.1] | 2.46 | 18,900 [5.5] | 2.46 | 18,900 [5.5] | 9.30 | | |
| | | RGRM-107ZAU? | 1 | 19,700 [5.8] | 15,100 [4.4] | 14.00 | 11.15 | 1175 [554] | 71 | 33,600 [9.8] | 3.88 | 19,600 [5.7] | 2.50 | 19,600 [5.7] | 2.48 | 19,000 [5.6] | 9.30 | | |
| | | | 2 | 34,350 [10.1] | 11,400 [3.3] | 14.00 | 10.85 | 1625 [767] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 19,100 [5.6] | 2.44 | 19,100 [5.6] | 9.25 | | |
| | | RGTIM-077RBG? | 1 | 20,050 [5.9] | 15,350 [4.5] | 14.00 | 11.40 | 1225 [578] | 71 | 33,800 [9.9] | 3.88 | 19,000 [5.6] | 2.50 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 9.30 | | |
| | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 14.00 | 10.95 | 1650 [779] | 72 | 49,000 [14.4] | 3.80 | 31,000 [9.1] | 2.46 | 19,100 [5.6] | 2.46 | 19,100 [5.6] | 9.25 | | |
| RGTIM-097ZAU? | 1 | 19,900 [5.8] | 15,100 [4.4] | 14.00 | 10.95 | 1200 [566] | 71 | 33,800 [9.9] | 3.80 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 2.44 | 19,000 [5.6] | 9.30 | | | | |
| | 2 | 34,350 [10.1] | 11,650 [3.4] | 14.00 | 10.85 | 1625 [767] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 19,100 [5.6] | 2.44 | 19,100 [5.6] | 9.25 | | | | |
| ROLA-070E04 | 1 | 19,200 [5.6] | 15,800 [4.6] | 14.00 | 11.15 | 1175 [554] | 71 | 33,600 [9.8] | 3.84 | 19,600 [5.7] | 2.50 | 19,600 [5.7] | 2.48 | 19,000 [5.6] | 9.30 | | | | |
| | 2 | 34,600 [10.1] | 11,400 [3.3] | 14.00 | 10.85 | 1625 [767] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 19,100 [5.6] | 2.44 | 19,100 [5.6] | 9.25 | | | | |
| RCFL-H*4821+RXMD-C06 | 1 | 25,050 [7.3] | 8,750 [2.6] | 13.50 | 11.45 | 1200 [566] | 71 | 34,400 [10.1] | 3.88 | 19,600 [5.7] | 2.50 | 19,600 [5.7] | 2.48 | 19,000 [5.6] | 9.30 | | | | |
| | 2 | 33,800 [9.9] | 11,700 [3.4] | 13.50 | 10.95 | 1475 [696] | 72 | 48,000 [14.1] | 3.84 | 30,400 [8.9] | 2.48 | 19,000 [5.6] | 2.48 | 19,000 [5.6] | 9.30 | | | | |
| RCFL-H*4824 | 1 | 19,800 [5.8] | 15,200 [4.5] | 14.00 | 10.85 | 1150 [543] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.50 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 9.25 | | | | |
| | 2 | 34,450 [10.1] | 11,550 [3.4] | 14.00 | 10.85 | 1600 [755] | 72 | 49,000 [14.4] | 3.78 | 31,200 [9.1] | 2.44 | 19,100 [5.6] | 2.44 | 19,100 [5.6] | 9.20 | | | | |
| RCFL-H*4824 | 1 | 19,750 [5.8] | 15,050 [4.4] | 14.00 | 11.15 | 1175 [554] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 2.44 | 19,000 [5.6] | 9.30 | | | | |
| | 2 | 34,400 [10.1] | 11,600 [3.4] | 14.00 | 10.85 | 1625 [767] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 19,100 [5.6] | 2.44 | 19,100 [5.6] | 9.20 | | | | |
| RCFL-H*4824 | 1 | 19,800 [5.8] | 15,000 [4.4] | 14.00 | 11.15 | 1225 [578] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 2.48 | 19,000 [5.6] | 9.30 | | | | |
| | 2 | 34,250 [10.0] | 11,750 [3.4] | 14.00 | 10.95 | 1625 [767] | 72 | 49,000 [14.4] | 3.80 | 31,400 [9.2] | 2.46 | 19,100 [5.6] | 2.46 | 19,100 [5.6] | 9.25 | | | | |
| RCFL-H*4824 | 1 | 19,700 [5.8] | 15,100 [4.4] | 14.00 | 10.85 | 1225 [578] | 71 | 33,800 [9.9] | 3.78 | 19,100 [5.6] | 2.46 | 19,100 [5.6] | 2.44 | 19,100 [5.6] | 9.20 | | | | |
| | 2 | 34,400 [10.1] | 11,600 [3.4] | 14.00 | 10.85 | 1600 [755] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 19,100 [5.6] | 2.44 | 19,100 [5.6] | 9.20 | | | | |
| RCFL-H*4824 | 1 | 19,800 [5.8] | 15,000 [4.4] | 14.00 | 11.15 | 1225 [578] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 2.48 | 19,000 [5.6] | 9.30 | | | | |
| | 2 | 34,250 [10.0] | 11,750 [3.4] | 14.00 | 10.95 | 1625 [767] | 72 | 49,000 [14.4] | 3.80 | 31,400 [9.2] | 2.46 | 19,100 [5.6] | 2.46 | 19,100 [5.6] | 9.25 | | | | |
| RCFL-H*4824 | 1 | 19,800 [5.8] | 15,200 [4.5] | 14.00 | 10.90 | 1175 [554] | 71 | 33,800 [9.9] | 3.78 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 2.44 | 19,000 [5.6] | 9.30 | | | | |
| | 2 | 34,400 [10.1] | 11,600 [3.4] | 14.00 | 10.90 | 1675 [790] | 72 | 49,500 [14.5] | 3.78 | 31,400 [9.2] | 2.44 | 19,100 [5.6] | 2.44 | 19,100 [5.6] | 9.30 | | | | |
| RCFL-H*4824 | 1 | 19,800 [5.8] | 15,200 [4.5] | 14.00 | 10.95 | 1175 [554] | 71 | 33,800 [9.9] | 3.80 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 2.46 | 19,000 [5.6] | 9.30 | | | | |
| | 2 | 34,300 [10.0] | 11,700 [3.4] | 14.00 | 10.95 | 1625 [767] | 72 | 49,000 [14.4] | 3.80 | 31,400 [9.2] | 2.46 | 19,100 [5.6] | 2.46 | 19,100 [5.6] | 9.30 | | | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF |
|-----------------------|---------------|---------|--------------|--|---------------|--------------|----------------------------|--------------------------|-----------------------------|-----------------------|--|--------------|--|---|-----------------------------------|--------------|---------------------------------------|--------------|------|--------------------------|
| | | | | AHRI Ratings | | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | |
| | | | | Total Capacity | SEER | EER | | | | | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | COP | | |
| Rev. 6/30/10 | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,000 [13.5] | 14.50 | 11.20 | 1225 [578] | 71 | 33,600 [9.8] | 3.86 | 18,900 [5.5] | 2.48 | 33,600 [9.8] | 2.48 | 18,900 [5.5] | 9.35 | |
| | | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 1650 [779] | 72 | 49,000 [14.4] | 31,200 [9.1] | 2.48 | 33,600 [9.8] | 3.84 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 9.30 | |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.10 | 1225 [578] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 9.25 | |
| | | | | 2 | 34,400 [10.1] | 11,600 [3.4] | 1600 [755] | 72 | 49,000 [14.4] | 31,200 [9.1] | 2.46 | 33,800 [9.9] | 3.80 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 9.25 | |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.00 | 1200 [566] | 71 | 33,800 [9.9] | 3.82 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,000 [5.6] | 9.40 | |
| | | | | 2 | 34,250 [10.0] | 11,750 [3.4] | 1575 [743] | 72 | 49,000 [14.4] | 30,800 [9.0] | 2.52 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,000 [13.5] | 14.00 | 10.95 | 1175 [554] | 71 | 33,800 [9.9] | 3.78 | 19,000 [5.6] | 2.44 | 33,800 [9.9] | 2.44 | 19,000 [5.6] | 9.30 | |
| | | | | 2 | 34,400 [10.1] | 11,600 [3.4] | 1675 [790] | 72 | 49,500 [14.5] | 31,400 [9.2] | 2.44 | 33,800 [9.9] | 3.82 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,000 [5.6] | 9.30 | |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,000 [13.5] | 14.50 | 11.00 | 1175 [554] | 71 | 33,800 [9.9] | 3.82 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,000 [5.6] | 9.30 | |
| | | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 1625 [767] | 72 | 49,000 [14.4] | 31,200 [9.1] | 2.46 | 33,800 [9.9] | 3.86 | 18,900 [5.5] | 2.48 | 33,600 [9.8] | 2.48 | 18,900 [5.5] | 9.35 | |
| 048JEZ | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,000 [13.5] | 14.50 | 11.25 | 1225 [578] | 71 | 33,600 [9.8] | 3.86 | 18,900 [5.5] | 2.48 | 33,600 [9.8] | 2.48 | 18,900 [5.5] | 9.30 | |
| | | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 1650 [779] | 72 | 49,000 [14.4] | 31,000 [9.1] | 2.48 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.48 | 33,800 [9.9] | 2.48 | 19,000 [5.6] | 9.30 | |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.15 | 1225 [578] | 71 | 33,800 [9.9] | 3.84 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 9.25 | |
| | | | | 2 | 34,450 [10.1] | 11,550 [3.4] | 1600 [755] | 72 | 49,000 [14.4] | 31,200 [9.1] | 2.46 | 33,800 [9.9] | 3.82 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,100 [5.6] | 9.25 | |
| | | ID Coil | ID Air Mover | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.00 | 1200 [566] | 71 | 33,800 [9.9] | 3.82 | 19,000 [5.6] | 2.46 | 33,800 [9.9] | 2.46 | 19,000 [5.6] | 9.40 | |
| | | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 1600 [755] | 72 | 49,000 [14.4] | 31,200 [9.1] | 2.46 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.35 | |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,000 [13.5] | 14.50 | 11.50 | 1200 [566] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,800 [5.5] | 9.45 | |
| | | | | 2 | 34,700 [10.2] | 11,800 [3.5] | 1600 [755] | 72 | 49,000 [14.4] | 31,000 [9.1] | 2.50 | 33,600 [9.8] | 3.90 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 9.45 | |
| | | ID Coil | ID Air Mover | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1200 [566] | 71 | 33,600 [9.8] | 3.96 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,800 [5.5] | 9.40 | |
| | | | | 2 | 34,700 [10.2] | 11,800 [3.5] | 1600 [755] | 72 | 48,500 [14.2] | 30,800 [9.0] | 2.52 | 33,600 [9.8] | 3.94 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,800 [5.5] | 9.40 | |
| | | ID Coil | ID Air Mover | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1225 [578] | 71 | 33,600 [9.8] | 3.94 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,800 [5.5] | 9.35 | |
| | | | | 2 | 34,650 [10.2] | 11,850 [3.5] | 1600 [755] | 72 | 48,500 [14.2] | 30,800 [9.0] | 2.50 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 9.35 | |
| | | ID Coil | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,500 [13.6] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | | | 2 | 34,750 [10.2] | 11,750 [3.4] | 1625 [767] | 72 | 49,000 [14.4] | 30,800 [9.0] | 2.50 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,000 [13.5] | 14.50 | 11.50 | 1200 [566] | 71 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 1575 [743] | 72 | 48,500 [14.2] | 30,800 [9.0] | 2.52 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1200 [566] | 71 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.35 | |
| | | | | 2 | 34,650 [10.2] | 11,850 [3.5] | 1625 [767] | 72 | 49,000 [14.4] | 30,800 [9.0] | 2.50 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 9.35 | |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,000 [13.5] | 14.50 | 11.50 | 1200 [566] | 71 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 1575 [743] | 72 | 48,500 [14.2] | 30,800 [9.0] | 2.52 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1200 [566] | 71 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | | | 2 | 34,650 [10.2] | 11,850 [3.5] | 1600 [755] | 72 | 48,500 [14.2] | 30,800 [9.0] | 2.52 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.40 | |
| | | ID Coil | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.52 | 33,600 [9.8] | 2.52 | 18,900 [5.5] | 9.35 | |
| | | | | 2 | 34,750 [10.2] | 11,750 [3.4] | 1600 [755] | 72 | 49,000 [14.4] | 30,800 [9.0] | 2.50 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 2.50 | 18,900 [5.5] | 9.35 | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPR-L | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance 70°F [21°C] Indoor | | | | | | DOE Region IV HSPF | | | |
|-----------------------|---------------|---|--------------|--|---------------|----------------------------|--------------------------|-------------------|------------|--|-----------------------|--|---------------|--|--------------|--------------------------|---------------|-----------------------------------|---------------------------------------|
| | | | | ID Coil | ID Air Mover | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | AHRI Ratings | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | COP | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | COP | 47°F [8.5°C] DB/ 43°F [6°C] WB | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB |
| | | | | | | | | Total Capacity | SEER | | | | | EER | BTU/H [kW] | | | | |
| Rev. 6/30/10 | RGPE-107BRM? | 1 | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 33,600 [9.8] | 18,900 [5.5] | 9.40 | | | |
| | | | | | | | | | | | | | | | | | 2 | 34,750 [10.2] | 11,750 [3.4] |
| | RGPE-127ARM? | 1 | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1200 [566] | 71 | 33,600 [9.8] | 3.94 | 18,800 [5.5] | 33,600 [9.8] | 18,800 [5.5] | 9.45 | | | |
| | | | | | | | | | | | | | | | | | 2 | 34,650 [10.2] | 11,850 [3.5] |
| | RGPR-077BRQ? | 1 | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.55 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 33,600 [9.8] | 18,900 [5.5] | 9.40 | | | |
| | | | | | | | | | | | | | | | | | 2 | 34,800 [10.2] | 11,700 [3.4] |
| | RGPR-107BRM? | 1 | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,000 [13.5] | 14.50 | 11.30 | 1200 [566] | 71 | 33,600 [9.8] | 3.88 | 19,000 [5.6] | 33,600 [9.8] | 19,000 [5.6] | 9.35 | | | |
| | | | | | | | | | | | | | | | | | 2 | 34,350 [10.1] | 11,650 [3.4] |
| | RGPR-127ARM? | 1 | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,000 [13.5] | 14.50 | 11.60 | 1250 [590] | 71 | 33,600 [9.8] | 3.94 | 18,900 [5.5] | 33,600 [9.8] | 18,900 [5.5] | 9.40 | | | |
| | | | | | | | | | | | | | | | | | 2 | 34,350 [10.1] | 11,650 [3.4] |
| RGRM-097ZAJ? | 1 | 1 | 19,650 [5.8] | 14,950 [4.4] | 46,000 [13.5] | 13.50 | 10.75 | 1225 [578] | 71 | 34,000 [10.0] | 3.74 | 19,200 [5.6] | 34,000 [10.0] | 19,200 [5.6] | 9.15 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 1625 [767] |
| RGRM-107ZAJ? | 1 | 1 | 19,700 [5.8] | 15,100 [4.4] | 46,000 [13.5] | 14.00 | 10.80 | 1150 [543] | 71 | 33,800 [9.9] | 3.74 | 19,100 [5.6] | 33,800 [9.9] | 19,100 [5.6] | 9.20 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 1600 [755] |
| RGRM-127RAJ? | 1 | 1 | 19,750 [5.8] | 15,050 [4.4] | 46,000 [13.5] | 14.00 | 11.20 | 1225 [578] | 71 | 33,800 [9.9] | 3.84 | 19,100 [5.6] | 33,800 [9.9] | 19,100 [5.6] | 9.25 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,250 [10.0] | 11,750 [3.4] | 1625 [767] |
| RGTM-077RBG? | 1 | 1 | 20,050 [5.9] | 15,350 [4.5] | 46,000 [13.5] | 14.00 | 11.05 | 1325 [625] | 71 | 34,000 [10.0] | 3.82 | 19,200 [5.6] | 34,000 [10.0] | 19,200 [5.6] | 9.20 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,300 [10.0] | 11,700 [3.4] | 1675 [790] |
| RGTM-097ZAJ? | 1 | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,000 [13.5] | 14.00 | 11.05 | 1250 [590] | 71 | 33,800 [9.9] | 3.82 | 19,100 [5.6] | 33,800 [9.9] | 19,100 [5.6] | 9.25 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,350 [10.1] | 11,650 [3.4] | 1600 [755] |
| RGTM-107RBJ? | 1 | 1 | 19,950 [5.8] | 15,250 [4.5] | 46,500 [13.6] | 14.00 | 11.20 | 1275 [602] | 71 | 33,800 [9.9] | 3.86 | 19,100 [5.6] | 33,800 [9.9] | 19,100 [5.6] | 9.25 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,700 [10.2] | 11,800 [3.5] | 1675 [790] |
| ROLA-070E04 | 1 | 1 | 19,200 [5.6] | 15,800 [4.6] | 46,000 [13.5] | 13.50 | 11.15 | 1175 [554] | 71 | 33,600 [9.8] | 3.84 | 18,900 [5.5] | 33,600 [9.8] | 18,900 [5.5] | 9.30 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,600 [10.1] | 11,400 [3.3] | 1600 [755] |
| ROLA-115E05 | 1 | 1 | 19,200 [5.6] | 15,800 [4.6] | 46,000 [13.5] | 14.00 | 11.35 | 1200 [566] | 71 | 33,600 [9.8] | 3.88 | 18,900 [5.5] | 33,600 [9.8] | 18,900 [5.5] | 9.35 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,400 [10.1] | 11,600 [3.4] | 1600 [755] |
| RCFL-H*4824+RXMID-C06 | Coil Only | 1 | 1 | 25,050 [7.3] | 8,750 [2.6] | 45,500 [13.3] | 13.50 | 11.45 | 1200 [566] | 71 | 34,400 [10.1] | 3.88 | 19,600 [5.7] | 34,400 [10.1] | 19,600 [5.7] | 9.00 | | | |
| | | | | | | | | | | | | | | | | | 2 | 33,800 [9.9] | 11,700 [3.4] |
| RCFM-H*4821 | 1 | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,500 [13.6] | 14.50 | 11.35 | 1225 [578] | 71 | 33,600 [9.8] | 3.90 | 18,900 [5.5] | 33,600 [9.8] | 18,900 [5.5] | 9.35 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,700 [10.2] | 11,800 [3.5] | 1600 [755] |
| RGLE-107BRM? | 1 | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1200 [566] | 71 | 33,600 [9.8] | 3.96 | 18,800 [5.5] | 33,600 [9.8] | 18,800 [5.5] | 9.45 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,700 [10.2] | 11,800 [3.5] | 1600 [755] |
| RGPE-077BRQ? | 1 | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 33,600 [9.8] | 18,900 [5.5] | 9.35 | | | | |
| | | | | | | | | | | | | | | | | 2 | 34,750 [10.2] | 11,750 [3.4] | 1600 [755] |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance 70°F [21°C] Indoor | | | | | | DOE Region IV HSPF | |
|-----------------------|---------------|--------------|---------------|--|---------------|---------------|-----------------------------|-----------------------|--|--|--|---------------|-----------------------------------|---------------|---------------------------------------|--------------------------|------------|
| | | | | AHRI Ratings | | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | 47°F [8.5°C] DB/ 43°F [6°C] WB | | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | |
| | | | | Total Capacity | SEER | EER | | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | | BTU/H [kW] |
| Rev. 6/30/10 | RGPE-107BRM? | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 18,900 [5.5] | 9.40 |
| | | | 2 | 34,750 [10.2] | 11,750 [3.4] | | | | 1625 [767] | 72 | 49,000 [14.4] | | 30,800 [9.0] | | | | |
| | RCFM-H*4821 | ID Air Mover | 1 | 20,050 [5.9] | 15,350 [4.5] | 46,000 [13.5] | 14.00 | 11.05 | 1325 [625] | 71 | 34,000 [10.0] | 3.82 | 19,200 [5.6] | 2.46 | 34,000 [10.0] | 19,200 [5.6] | 9.20 |
| | | | 2 | 34,300 [10.0] | 11,700 [3.4] | | | | 1675 [790] | 72 | 49,000 [14.4] | | 31,400 [9.2] | | | | |
| | RCFM-H*4821 | ID Air Mover | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,000 [13.5] | 14.00 | 11.05 | 1250 [590] | 71 | 33,800 [9.9] | 3.82 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 19,100 [5.6] | 9.25 |
| | | | 2 | 34,350 [10.1] | 11,650 [3.4] | | | | 1600 [755] | 72 | 49,000 [14.4] | | 31,200 [9.1] | | | | |
| | ROLA-070E04 | ID Air Mover | 1 | 19,200 [5.6] | 15,800 [4.6] | 46,000 [13.5] | 13.50 | 11.15 | 1175 [554] | 71 | 33,600 [9.8] | 3.84 | 18,900 [5.5] | 2.46 | 33,600 [9.8] | 18,900 [5.5] | 9.30 |
| | | | 2 | 34,600 [10.1] | 11,400 [3.3] | | | | 1600 [755] | 72 | 49,000 [14.4] | | 31,200 [9.1] | | | | |
| | RGLA-077BRQ? | ID Air Mover | 1 | 19,800 [5.8] | 15,200 [4.5] | 46,500 [13.6] | 14.50 | 11.35 | 1225 [578] | 71 | 33,600 [9.8] | 3.90 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 18,900 [5.5] | 9.35 |
| | | | 2 | 34,700 [10.2] | 11,800 [3.5] | | | | 1600 [755] | 72 | 49,000 [14.4] | | 31,000 [9.1] | | | | |
| RGLA-107BRM? | ID Air Mover | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1200 [566] | 71 | 33,600 [9.8] | 3.96 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 18,800 [5.5] | 9.45 | |
| | | 2 | 34,700 [10.2] | 11,800 [3.5] | | | | 1600 [755] | 72 | 48,500 [14.2] | | 30,800 [9.0] | | | | | |
| RGLA-127ARM? | ID Air Mover | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1225 [578] | 71 | 33,600 [9.8] | 3.94 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 18,800 [5.5] | 9.40 | |
| | | 2 | 34,650 [10.2] | 11,850 [3.5] | | | | 1600 [755] | 72 | 48,500 [14.2] | | 30,800 [9.0] | | | | | |
| 048JEZ | ID Air Mover | 1 | 19,850 [5.8] | 15,150 [4.4] | 46,500 [13.6] | 14.50 | 11.45 | 1225 [578] | 71 | 33,600 [9.8] | 3.92 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 18,900 [5.5] | 9.40 | |
| | | 2 | 34,750 [10.2] | 11,750 [3.4] | | | | 1625 [767] | 72 | 49,000 [14.4] | | 30,800 [9.0] | | | | | |
| RGLA-127ARM? | ID Air Mover | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,500 [13.6] | 14.50 | 11.65 | 1200 [566] | 71 | 33,600 [9.8] | 3.94 | 18,800 [5.5] | 2.52 | 33,600 [9.8] | 18,800 [5.5] | 9.45 | |
| | | 2 | 34,650 [10.2] | 11,850 [3.5] | | | | 1625 [767] | 72 | 48,500 [14.2] | | 30,800 [9.0] | | | | | |
| RGLA-107BRM? | ID Air Mover | 1 | 20,050 [5.9] | 15,350 [4.5] | 46,000 [13.5] | 14.00 | 11.05 | 1325 [625] | 71 | 34,000 [10.0] | 3.82 | 19,200 [5.6] | 2.46 | 34,000 [10.0] | 19,200 [5.6] | 9.20 | |
| | | 2 | 34,300 [10.0] | 11,700 [3.4] | | | | 1675 [790] | 72 | 49,000 [14.4] | | 31,400 [9.2] | | | | | |
| RGLA-107BRM? | ID Air Mover | 1 | 19,900 [5.8] | 15,100 [4.4] | 46,000 [13.5] | 14.00 | 11.05 | 1250 [590] | 71 | 33,800 [9.9] | 3.82 | 19,100 [5.6] | 2.46 | 33,800 [9.9] | 19,100 [5.6] | 9.25 | |
| | | 2 | 34,350 [10.1] | 11,650 [3.4] | | | | 1600 [755] | 72 | 49,000 [14.4] | | 31,200 [9.1] | | | | | |
| RGLA-107BRM? | ID Air Mover | 1 | 19,950 [5.8] | 15,250 [4.5] | 46,500 [13.6] | 14.00 | 11.20 | 1275 [602] | 71 | 33,800 [9.9] | 3.86 | 19,100 [5.6] | 2.48 | 33,800 [9.9] | 19,100 [5.6] | 9.25 | |
| | | 2 | 34,700 [10.2] | 11,800 [3.5] | | | | 1675 [790] | 72 | 49,000 [14.4] | | 31,200 [9.1] | | | | | |
| ROLA-070E04 | ID Air Mover | 1 | 19,200 [5.6] | 15,800 [4.6] | 46,000 [13.5] | 13.50 | 11.15 | 1175 [554] | 71 | 33,600 [9.8] | 3.84 | 18,900 [5.5] | 2.46 | 33,600 [9.8] | 18,900 [5.5] | 9.30 | |
| | | 2 | 34,600 [10.1] | 11,400 [3.3] | | | | 1600 [755] | 72 | 49,000 [14.4] | | 31,200 [9.1] | | | | | |
| ROLA-115E05 | ID Air Mover | 1 | 19,200 [5.6] | 15,800 [4.6] | 46,000 [13.5] | 14.00 | 11.35 | 1200 [566] | 71 | 33,600 [9.8] | 3.88 | 18,900 [5.5] | 2.50 | 33,600 [9.8] | 18,900 [5.5] | 9.35 | |
| | | 2 | 34,400 [10.1] | 11,600 [3.4] | | | | 1600 [755] | 72 | 49,000 [14.4] | | 31,000 [9.1] | | | | | |
| RGLA-107BRM? | ID Air Mover | 1 | 26,650 [7.8] | 8,750 [2.6] | 47,000 [13.8] | 16.00 | 12.25 | 1200 [566] | 71 | 33,400 [9.8] | 4.20 | 18,600 [5.4] | 2.52 | 33,400 [9.8] | 18,600 [5.4] | 9.05 | |
| | | 2 | 35,100 [10.3] | 11,900 [3.5] | | | | 1625 [767] | 72 | 48,000 [14.1] | | 30,200 [8.8] | | | | | |
| 060JEZ | ID Air Mover | 1 | 23,650 [6.9] | 19,350 [5.7] | 57,000 [16.7] | 15.00 | 11.40 | 1150 [543] | 76 | 45,000 [13.2] | 3.56 | 27,800 [8.1] | 2.66 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | |
| | | 2 | 40,350 [11.8] | 16,650 [4.9] | | | | 1600 [755] | 78 | 61,500 [18.0] | | 41,000 [12.0] | | | | | |
| RGLA-107BRM? | ID Air Mover | 1 | 23,550 [6.9] | 19,250 [5.6] | 56,500 [16.6] | 15.00 | 11.15 | 1175 [554] | 76 | 45,000 [13.2] | 3.52 | 27,800 [8.1] | 2.62 | 45,000 [13.2] | 27,800 [8.1] | 9.50 | |
| | | 2 | 39,950 [11.7] | 16,550 [4.8] | | | | 1625 [767] | 78 | 61,500 [18.0] | | 41,500 [12.2] | | | | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | | | |
|-----------------------|---------------|--|-------|--|---------------|----------------------------|--------------------------|-------------------|-------|---|-----------------------|--|------------|--|------------|--------------------------|--------------|------------|-----|------------|
| | | | | ID Coil | ID Air Mover | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | AHRI Ratings | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | COP | BTU/H [kW] | COP | BTU/H [kW] |
| | | | | | | | | Total Capacity | SEER | | | EER | BTU/H [kW] | COP | BTU/H [kW] | | | | | |
| Rev. 6/30/10 | | | 1 | RGFD-127RCM? | 23,600 [6.9] | 19,400 [5.7] | 57,500 [16.8] | 15.00 | 11.65 | 1225 [578] | 76 | 45,000 [13.2] | 3.58 | 27,800 [8.1] | 2.68 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGFE-097ZCM? | 40,550 [11.9] | 16,950 [5.0] | 56,500 [16.6] | 14.50 | 11.20 | 1650 [779] | 78 | 61,000 [17.9] | 3.52 | 41,000 [12.0] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.50 | | |
| | | | 1 | RGFE-107ZCM? | 23,050 [6.8] | 18,750 [5.5] | 56,500 [16.6] | 14.50 | 11.15 | 1200 [566] | 76 | 45,000 [13.2] | 3.52 | 27,800 [8.1] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.50 | | |
| | | | 2 | RGFE-107ZCM? | 39,950 [11.7] | 16,550 [4.8] | 56,500 [16.6] | 14.50 | 11.15 | 1600 [755] | 78 | 61,500 [18.0] | 3.52 | 41,000 [12.0] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.50 | | |
| | | | 1 | RGFE-127RCM? | 23,100 [6.8] | 18,900 [5.5] | 57,000 [16.7] | 14.50 | 11.40 | 1225 [578] | 76 | 44,500 [13.0] | 3.56 | 27,800 [8.1] | 2.66 | 44,500 [13.0] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGFE-127RCM? | 39,850 [11.7] | 16,650 [4.9] | 57,000 [16.7] | 14.50 | 11.40 | 1625 [767] | 78 | 61,500 [18.0] | 3.52 | 41,000 [12.0] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 1 | RGGD-097ZCM? | 23,650 [6.9] | 19,350 [5.7] | 57,000 [16.7] | 15.00 | 11.25 | 1175 [554] | 76 | 45,000 [13.2] | 3.52 | 27,800 [8.1] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGGD-097ZCM? | 40,350 [11.8] | 16,650 [4.9] | 57,000 [16.7] | 15.00 | 11.30 | 1675 [790] | 78 | 61,500 [18.0] | 3.54 | 41,000 [12.0] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 1 | RGGD-107ZCM? | 23,650 [6.9] | 19,350 [5.7] | 57,000 [16.7] | 15.00 | 11.55 | 1175 [554] | 76 | 45,000 [13.2] | 3.56 | 27,800 [8.1] | 2.66 | 44,500 [13.0] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGGD-107ZCM? | 40,400 [11.8] | 16,600 [4.9] | 57,000 [16.8] | 15.00 | 11.55 | 1625 [767] | 78 | 61,000 [17.9] | 3.56 | 41,000 [12.0] | 2.66 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 1 | RGGE-097ZCM? | 23,150 [6.8] | 18,850 [5.5] | 57,000 [16.7] | 14.50 | 11.40 | 1225 [578] | 76 | 45,000 [13.2] | 3.56 | 27,800 [8.1] | 2.66 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGGE-097ZCM? | 40,350 [11.8] | 16,650 [4.9] | 57,000 [16.7] | 14.50 | 11.40 | 1600 [755] | 78 | 61,500 [18.0] | 3.54 | 41,000 [12.0] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| 060JEZ | | | 1 | RGGE-107ZCM? | 23,050 [6.8] | 18,750 [5.5] | 56,500 [16.6] | 14.50 | 11.25 | 1200 [566] | 76 | 45,000 [13.2] | 3.54 | 27,800 [8.1] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.50 | | |
| | | | 2 | RGGE-107ZCM? | 40,000 [11.7] | 16,500 [4.8] | 57,000 [16.7] | 15.00 | 11.65 | 1600 [755] | 78 | 61,500 [18.0] | 3.60 | 40,500 [11.9] | 2.70 | 44,500 [13.0] | 27,600 [8.1] | 9.60 | | |
| | | | 1 | RGGE-127RCM? | 23,150 [6.8] | 19,050 [5.6] | 57,000 [16.7] | 15.00 | 11.65 | 1200 [566] | 76 | 44,500 [13.0] | 3.52 | 27,800 [8.1] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGGE-127RCM? | 40,300 [11.8] | 16,700 [4.9] | 57,000 [16.7] | 15.00 | 11.25 | 1575 [743] | 78 | 61,000 [17.9] | 3.52 | 41,000 [12.0] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 1 | RGJD-097ZCM? | 23,650 [6.9] | 19,350 [5.7] | 57,000 [16.7] | 15.00 | 11.30 | 1175 [554] | 76 | 45,000 [13.2] | 3.54 | 27,800 [8.1] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGJD-097ZCM? | 40,350 [11.8] | 16,650 [4.9] | 57,000 [16.7] | 15.00 | 11.30 | 1675 [790] | 78 | 61,500 [18.0] | 3.54 | 41,000 [12.0] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 1 | RGJD-107ZCM? | 23,650 [6.9] | 19,350 [5.7] | 57,000 [16.7] | 15.00 | 11.55 | 1175 [554] | 76 | 45,000 [13.2] | 3.56 | 27,800 [8.1] | 2.68 | 44,500 [13.0] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGJD-107ZCM? | 40,400 [11.8] | 16,600 [4.9] | 57,000 [16.8] | 15.00 | 11.55 | 1625 [767] | 78 | 61,500 [18.0] | 3.56 | 41,000 [12.0] | 2.68 | 44,500 [13.0] | 27,800 [8.1] | 9.55 | | |
| | | | 1 | RGJF-097ZCM? | 23,150 [6.8] | 18,850 [5.5] | 57,000 [16.7] | 14.50 | 11.40 | 1225 [578] | 76 | 45,000 [13.2] | 3.56 | 27,800 [8.1] | 2.66 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | RGJF-097ZCM? | 40,350 [11.8] | 16,650 [4.9] | 57,000 [16.7] | 14.50 | 11.40 | 1600 [755] | 78 | 61,500 [18.0] | 3.56 | 41,000 [12.0] | 2.66 | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 1 | RGJF-107ZCM? | 23,050 [6.8] | 18,750 [5.5] | 56,500 [16.6] | 14.50 | 11.25 | 1200 [566] | 76 | 45,000 [13.2] | 3.54 | 27,800 [8.1] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.50 | | |
| | | | 2 | RGJF-107ZCM? | 40,000 [11.7] | 16,500 [4.8] | 56,500 [16.6] | 14.50 | 11.25 | 1600 [755] | 78 | 61,500 [18.0] | 3.54 | 41,000 [12.0] | 2.64 | 45,000 [13.2] | 27,800 [8.1] | 9.50 | | |
| | | | 1 | RGJF-127RCM? | 23,150 [6.8] | 19,050 [5.6] | 57,000 [16.7] | 15.00 | 11.65 | 1200 [566] | 76 | 44,500 [13.0] | 3.60 | 27,600 [8.1] | 2.70 | 44,500 [13.0] | 27,600 [8.1] | 9.60 | | |
| | | | 2 | RGJF-127RCM? | 40,300 [11.8] | 16,700 [4.9] | 57,000 [16.7] | 15.00 | 11.65 | 1575 [743] | 78 | 61,000 [17.9] | 3.60 | 40,500 [11.9] | 2.70 | 44,500 [13.0] | 27,600 [8.1] | 9.60 | | |
| | | | 1 | RGLE-077BRQ? | 23,200 [6.8] | 19,000 [5.6] | 57,000 [16.7] | 15.00 | 11.60 | 1225 [578] | 76 | 44,500 [13.0] | 3.60 | 27,600 [8.1] | 2.68 | 44,500 [13.0] | 27,600 [8.1] | 9.60 | | |
| | | | 2 | RGLE-077BRQ? | 40,350 [11.8] | 16,650 [4.9] | 57,000 [16.7] | 15.00 | 11.60 | 1600 [755] | 78 | 61,000 [17.9] | 3.60 | 41,000 [12.0] | 2.68 | 44,500 [13.0] | 27,600 [8.1] | 9.60 | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF |
|-----------------------|---------------|---------|--------------|--|--------------------------|-------------------|---------------|-------|------------------|-----------------------|------------|---------------|------------|--|------------|--|------------|--|------|--------------------------|
| | | | | AHRI Ratings | | | | | Indoor Airflow | | | | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | |
| | | | | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | Total Capacity | SEER | EER | Indoor CFM [L/s] | Sound Rating dB | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | COP | BTU/H [kW] | COP | | |
| Rev. 6/30/10 | | ID Coil | ID Air Mover | 1 | 23,200 [6.8] | 19,000 [5.6] | 57,500 [16.8] | 15.00 | 11.80 | 1200 [566] | 76 | 44,500 [13.0] | 3.62 | 27,600 [8.1] | 2.72 | 44,500 [13.0] | 2.72 | 27,600 [8.1] | 9.65 | |
| | | | | 2 | 40,600 [11.9] | 16,900 [5.0] | | | | 1600 [755] | 78 | 61,000 [17.9] | | 40,500 [11.9] | | | | | | |
| | | | | 1 | 23,250 [6.8] | 18,950 [5.6] | 57,000 [16.7] | 15.00 | 11.80 | 1225 [578] | 76 | 44,500 [13.0] | 3.62 | 27,600 [8.1] | 2.72 | 44,500 [13.0] | 2.72 | 27,600 [8.1] | 9.65 | |
| | | | | 2 | 40,300 [11.8] | 16,700 [4.9] | | | | 1600 [755] | 78 | 61,000 [17.9] | | 40,500 [11.9] | | | | | | |
| | | | | 1 | 23,650 [6.9] | 19,350 [5.7] | 57,500 [16.8] | 15.00 | 11.70 | 1225 [578] | 76 | 44,500 [13.0] | 3.60 | 27,800 [8.1] | 2.70 | 44,500 [13.0] | 2.70 | 27,800 [8.1] | 9.60 | |
| | | | | 2 | 40,600 [11.9] | 16,900 [5.0] | | | | 1625 [767] | 78 | 61,000 [17.9] | | 41,000 [12.0] | | | | | | |
| | | | | 1 | 23,700 [6.9] | 19,300 [5.7] | 57,000 [16.7] | 15.00 | 11.70 | 1200 [566] | 76 | 44,500 [13.0] | 3.62 | 27,600 [8.1] | 2.70 | 44,500 [13.0] | 2.70 | 27,600 [8.1] | 9.60 | |
| | | | | 2 | 40,350 [11.8] | 16,650 [4.9] | | | | 1575 [743] | 78 | 61,000 [17.9] | | 40,500 [11.9] | | | | | | |
| | | | | 1 | 23,700 [6.9] | 19,000 [5.6] | 57,000 [16.7] | 15.00 | 11.65 | 1225 [578] | 76 | 44,500 [13.0] | 3.60 | 27,600 [8.1] | 2.70 | 44,500 [13.0] | 2.70 | 27,600 [8.1] | 9.60 | |
| | | | | 2 | 40,200 [11.8] | 16,800 [4.9] | | | | 1600 [755] | 78 | 61,000 [17.9] | | 41,000 [12.0] | | | | | | |
| | | | | 1 | 23,200 [6.8] | 19,000 [5.6] | 57,000 [16.7] | 15.00 | 11.70 | 1225 [578] | 76 | 44,500 [13.0] | 3.60 | 27,600 [8.1] | 2.70 | 44,500 [13.0] | 2.70 | 27,600 [8.1] | 9.60 | |
| | | | | 2 | 40,300 [11.8] | 16,700 [4.9] | | | | 1625 [767] | 78 | 61,000 [17.9] | | 41,000 [12.0] | | | | | | |
| | | | | 1 | 23,200 [6.8] | 19,000 [5.6] | 57,500 [16.8] | 15.00 | 11.80 | 1200 [566] | 76 | 44,500 [13.0] | 3.62 | 27,600 [8.1] | 2.70 | 44,500 [13.0] | 2.70 | 27,600 [8.1] | 9.65 | |
| | | | | 2 | 40,700 [11.9] | 16,800 [4.9] | | | | 1625 [767] | 78 | 61,000 [17.9] | | 40,500 [11.9] | | | | | | |
| 060JEZ | | | RCFL-H*6024 | 1 | 23,700 [6.9] | 19,300 [5.7] | 57,500 [16.8] | 15.00 | 11.75 | 1225 [578] | 76 | 44,500 [13.0] | 3.62 | 27,600 [8.1] | 2.70 | 44,500 [13.0] | 2.70 | 27,600 [8.1] | 9.60 | |
| | | | | 2 | 40,650 [11.9] | 16,850 [4.9] | | | | 1625 [767] | 78 | 61,000 [17.9] | | 40,500 [11.9] | | | | | | |
| | | | | 1 | 23,650 [6.9] | 19,350 [5.7] | 57,000 [16.7] | 15.00 | 11.55 | 1200 [566] | 76 | 45,000 [13.2] | 3.58 | 27,800 [8.1] | 2.68 | 45,000 [13.2] | 2.68 | 27,800 [8.1] | 9.55 | |
| | | | | 2 | 40,200 [11.8] | 16,800 [4.9] | | | | 1625 [767] | 78 | 61,000 [17.9] | | 41,000 [12.0] | | | | | | |
| | | | | 1 | 23,650 [6.9] | 19,350 [5.7] | 57,000 [16.7] | 15.00 | 11.75 | 1250 [590] | 76 | 44,500 [13.0] | 3.62 | 27,800 [8.1] | 2.70 | 44,500 [13.0] | 2.70 | 27,800 [8.1] | 9.60 | |
| | | | | 2 | 40,200 [11.8] | 16,800 [4.9] | | | | 1575 [743] | 78 | 61,000 [17.9] | | 40,500 [11.9] | | | | | | |
| | | | | 1 | 23,500 [6.9] | 19,100 [5.6] | 56,500 [16.6] | 14.50 | 11.00 | 1225 [578] | 76 | 45,000 [13.2] | 3.48 | 28,000 [8.2] | 2.60 | 45,000 [13.2] | 2.60 | 28,000 [8.2] | 9.40 | |
| | | | | 2 | 39,850 [11.7] | 16,650 [4.9] | | | | 1625 [767] | 78 | 62,000 [18.2] | | 41,500 [12.2] | | | | | | |
| | | | | 1 | 23,550 [6.9] | 19,250 [5.6] | 56,500 [16.6] | 14.50 | 11.00 | 1150 [543] | 76 | 45,000 [13.2] | 3.48 | 28,000 [8.2] | 2.60 | 45,000 [13.2] | 2.60 | 28,000 [8.2] | 9.45 | |
| | | | | 2 | 39,950 [11.7] | 16,550 [4.8] | | | | 1600 [755] | 78 | 62,000 [18.2] | | 41,500 [12.2] | | | | | | |
| | | | | 1 | 23,550 [6.9] | 19,250 [5.6] | 57,000 [16.7] | 15.00 | 11.40 | 1225 [578] | 76 | 45,000 [13.2] | 3.54 | 27,800 [8.1] | 2.66 | 45,000 [13.2] | 2.66 | 27,800 [8.1] | 9.50 | |
| | | | | 2 | 40,250 [11.8] | 16,750 [4.9] | | | | 1625 [767] | 78 | 61,500 [18.0] | | 41,000 [12.0] | | | | | | |
| | | | | 1 | 23,350 [6.8] | 19,050 [5.6] | 57,000 [16.7] | 14.50 | 11.40 | 1325 [625] | 76 | 45,000 [13.2] | 3.54 | 28,000 [8.2] | 2.64 | 45,000 [13.2] | 2.64 | 28,000 [8.2] | 9.45 | |
| | | | | 2 | 40,250 [11.8] | 16,750 [4.9] | | | | 1675 [790] | 78 | 61,500 [18.0] | | 41,000 [12.0] | | | | | | |
| | | | | 1 | 23,300 [6.8] | 19,100 [5.6] | 57,500 [16.8] | 14.50 | 11.55 | 1275 [602] | 76 | 45,000 [13.2] | 3.56 | 27,800 [8.1] | 2.66 | 45,000 [13.2] | 2.66 | 27,800 [8.1] | 9.55 | |
| | | | | 2 | 40,650 [11.9] | 16,850 [4.9] | | | | 1675 [790] | 78 | 61,000 [17.9] | | 41,000 [12.0] | | | | | | |
| | | | | 1 | 30,900 [9.1] | 11,300 [3.3] | 57,000 [16.7] | 14.00 | 11.45 | 1375 [649] | 76 | 45,500 [13.3] | 3.54 | 28,600 [8.4] | 2.64 | 45,500 [13.3] | 2.64 | 28,600 [8.4] | 9.20 | |
| | | | | 2 | 40,000 [11.7] | 17,000 [5.0] | | | | 1675 [790] | 78 | 61,500 [18.0] | | 41,000 [12.0] | | | | | | |

[] Designates Metric Conversions

Performance Data AHRI Standard Conditions (con't.)

Note: Only these combinations of indoor/outdoor units are approved and any other combinations should not be used.

| Outdoor Unit RPRL- | Model Numbers | | Stage | AHRI Cooling Performance 80° [26.5°C] / 67°F [19.5°C] WB Indoor Air 95°F [35°C] DB Outdoor Air | | | | | | AHRI Heating Performance (70°F [21°C] Indoor) | | | | | | DOE Region IV HSPF | | |
|-----------------------|---------------|-------------|-------|--|---------------|----------------------------|--------------------------|-------------------|-------|---|-----------------------|--|---------------|--|--------------|--------------------------|-----------------------------------|---------------------------------------|
| | | | | ID Coil | ID Air Mover | Net Sensible BTU/H [kW] | Net Latent BTU/H [kW] | AHRI Ratings | | Indoor Airflow CFM [L/s] | Sound Rating dB | Outdoor Air 47°F [8.5°C] DB/ 43°F [6°C] WB | | Outdoor Air 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB | | | 47°F [8.5°C] DB/ 43°F [6°C] WB | 17°F [-8.5°C] DB/ 15°F [-9.5°C] WB |
| | | | | | | | | Total Capacity | SEER | | | EER | COP | BTU/H [kW] | COP | | | |
| Rev. 6/30/10 | | | 1 | RGLE-07?BRQ? | 23,200 [6.8] | 19,000 [5.6] | 57,000 [16.7] | 15.00 | 11.60 | 1225 [578] | 76 | 44,500 [13.0] | 27,600 [8.1] | 44,500 [13.0] | 27,600 [8.1] | 9.60 | | |
| | | | 2 | | 40,350 [11.8] | 16,650 [4.9] | | | | 1600 [755] | 78 | 61,000 [17.9] | 41,000 [12.0] | | | | | |
| | | | 1 | RGLE-10?BRM? | 23,200 [6.8] | 19,000 [5.6] | 57,500 [16.8] | 15.00 | 11.80 | 1200 [566] | 76 | 44,500 [13.0] | 27,600 [8.1] | 44,500 [13.0] | 27,600 [8.1] | 9.65 | | |
| | | | 2 | | 40,600 [11.9] | 16,900 [5.0] | | | | 1600 [755] | 78 | 61,000 [17.9] | 40,500 [11.9] | | | | | |
| | | | 1 | RGLE-12?ARM? | 23,250 [6.8] | 18,950 [5.6] | 57,000 [16.7] | 15.00 | 11.80 | 1225 [578] | 76 | 44,500 [13.0] | 27,600 [8.1] | 44,500 [13.0] | 27,600 [8.1] | 9.65 | | |
| | | | 2 | | 40,300 [11.8] | 16,700 [4.9] | | | | 1600 [755] | 78 | 61,000 [17.9] | 40,500 [11.9] | | | | | |
| | | | 1 | RGPE-07?BRQ? | 23,200 [6.8] | 19,000 [5.6] | 57,000 [16.7] | 15.00 | 11.65 | 1225 [578] | 76 | 44,500 [13.0] | 27,600 [8.1] | 44,500 [13.0] | 27,600 [8.1] | 9.60 | | |
| | | | 2 | | 40,200 [11.8] | 16,800 [4.9] | | | | 1600 [755] | 78 | 61,000 [17.9] | 41,000 [12.0] | | | | | |
| 060JEZ | | RCFM-H*6024 | 1 | RGPE-10?BRM? | 23,200 [6.8] | 19,000 [5.6] | 57,000 [16.7] | 15.00 | 11.70 | 1225 [578] | 76 | 44,500 [13.0] | 27,600 [8.1] | 44,500 [13.0] | 27,600 [8.1] | 9.60 | | |
| | | | 2 | | 40,300 [11.8] | 16,700 [4.9] | | | | 1625 [767] | 78 | 61,000 [17.9] | 41,000 [12.0] | | | | | |
| | | | 1 | RGPE-12?ARM? | 23,200 [6.8] | 19,000 [5.6] | 57,500 [16.8] | 15.00 | 11.80 | 1200 [566] | 76 | 44,500 [13.0] | 27,600 [8.1] | 44,500 [13.0] | 27,600 [8.1] | 9.65 | | |
| | | | 2 | | 40,700 [11.9] | 16,800 [4.9] | | | | 1625 [767] | 78 | 61,000 [17.9] | 40,500 [11.9] | | | | | |
| | | | 1 | RGTM-07?RBQ? | 23,350 [6.8] | 19,050 [5.6] | 57,000 [16.7] | 14.50 | 11.40 | 1325 [625] | 76 | 45,000 [13.2] | 28,000 [8.2] | 45,000 [13.2] | 28,000 [8.2] | 9.45 | | |
| | | | 2 | | 40,250 [11.8] | 16,750 [4.9] | | | | 1675 [790] | 78 | 61,500 [18.0] | 41,000 [12.0] | | | | | |
| | | | 1 | RGTM-10?RBU? | 23,300 [6.8] | 19,100 [5.6] | 57,500 [16.8] | 14.50 | 11.55 | 1275 [602] | 76 | 45,000 [13.2] | 27,800 [8.1] | 45,000 [13.2] | 27,800 [8.1] | 9.55 | | |
| | | | 2 | | 40,650 [11.9] | 16,850 [4.9] | | | | 1675 [790] | 78 | 61,000 [17.9] | 41,000 [12.0] | | | | | |
| | | RCSL-H*6024 | 1 | | 31,900 [9.3] | 11,300 [3.3] | 58,000 [17.0] | 15.50 | 12.15 | 1375 [649] | 76 | 44,500 [13.0] | 27,600 [8.1] | 44,500 [13.0] | 27,600 [8.1] | 9.15 | | |
| | | | 2 | | 41,000 [12.0] | 17,000 [5.0] | | | | 1675 [790] | 78 | 61,000 [17.9] | 40,500 [11.9] | | | | | |


[] Designates Metric Conversions

Electrical and Physical Data

| Model Number RPRL- | ELECTRICAL | | | | | | PHYSICAL | | | | | | |
|-----------------------|--|--------------------------------|----------------------------------|--|---|---------------------------------|--------------------|--|-------------|--------------------------|-------------------|------------------|-----------------------|
| | Phase Frequency (Hz) Voltage (Volts) | Compressor | | Fan Motor Full Load Amperes (FLA) | Minimum Circuit Capacity Amperes | Fuse or HACR Circuit Breaker | | Outdoor Coil | | | R-410A Oz. [g] | Weight | |
| | | Rated Load Amperes (RLA) | Locked Rotor Amperes (LRA) | | | Minimum Amperes | Maximum Amperes | Face Area Sq. Ft. [m ²] | No. Rows | CFM [L/s] | | Net Lbs. [kg] | Shipping Lbs. [kg] |
| Rev. 6/30/2010 | | | | | | | | | | | | | |
| 024JEZ | 1-60-208/230 | 10.3/10.3 | 52 | 1 | 14/14 | 20/20 | 20/20 | 23.00 [2.14] | 1 | 2300/2800 [1085/1321] | 152 [4309] | 257 [116.6] | 264 [119.8] |
| 036JEZ | 1-60-208/230 | 16.7/16.7 | 82 | 1.7 | 23/23 | 30/30 | 35/35 | 22.22 [2.06] | 2 | 2800/3700 [1321/1746] | 245 [6946] | 310 [140.6] | 315 [142.9] |
| 048JEZ | 1-60-208/230 | 21.2/21.2 | 96 | 2 | 29/29 | 40/40 | 45/45 | 22.22 [2.06] | 2 | 2800/3500 [1321/1652] | 256 [7258] | 308 [139.7] | 322 [146.1] |
| 060JEZ | 1-60-208/230 | 25.6/25.6 | 118 | 2.2 | 35/35 | 45/45 | 50/50 | 22.22 [2.06] | 2 | 3800 [1793] | 284 [8051] | 335 [152] | 343 [155.6] |


NOTES: *HS = High Speed
*LS = Low Speed

Unit Dimensions

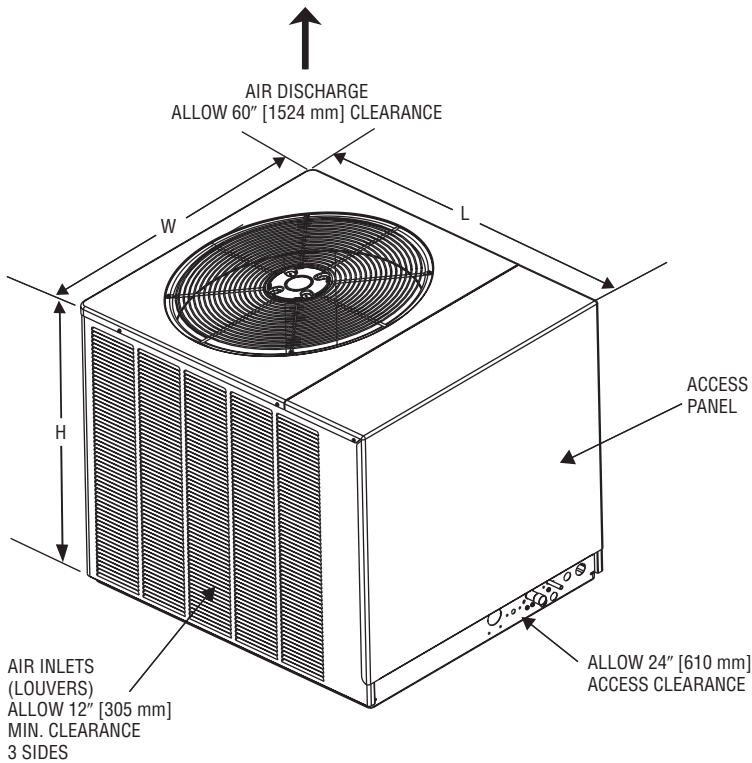

| Model Number RPRL- | Height "H" (Inches) [mm] | Length "L" (Inches) [mm] | Width "W" (Inches) [mm] |
|---------------------------------|-----------------------------|---------------------------------------|--------------------------------------|
| 024JEZ/036JEZ/ 048JEZ/060JEZ | 33 [838] | 44 ³ / ₈ [1127] | 31 ¹ / ₂ [800] |

[] Designates Metric Conversions

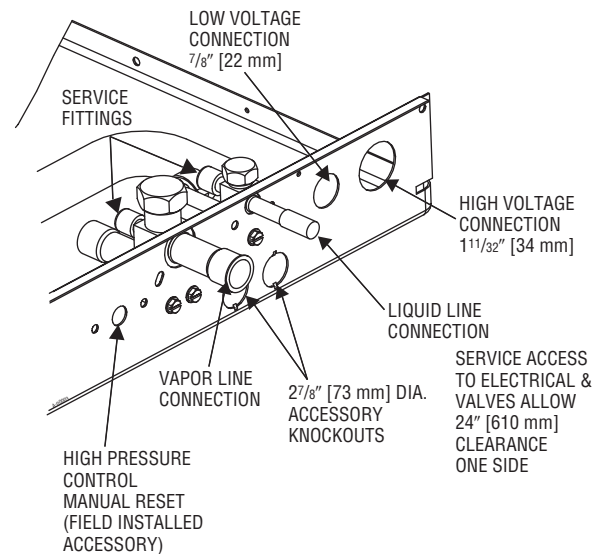

NOTES

NOTES

Heat Pump Refrigerant Line Size Information

| 2-Stage R-410A System Capacity Model | Liquid Line Connection Size (Inch I.D.) | Liquid Line Connection Size (Inch O.D.) [mm] | Liquid Line Size Outdoor Unit Above or Below Indoor Coil | | | | | |
|--------------------------------------|---|--|--|------------|------------|-------------|-------------|-------------|
| | | | Total Equivalent Length—Feet [m] | | | | | |
| | | | 25 [7.62] | 50 [15.24] | 75 [22.86] | 100 [30.48] | 125 [38.10] | 150 [45.72] |
| | | | Maximum Vertical Separation—Feet [m] | | | | | |
| 2 Ton | 5/16" | 1/4* [6.35] | 25 [7.62] | 10 [3.05] | N/A | N/A | N/A | N/A |
| | | 5/16 [7.94] | 25 [7.62] | 50 [15.24] | 40 [12.19] | 35 [10.67] | 29 [8.84] | 22 [6.71] |
| | | 3/8 [9.53] | 25 [7.62] | 50 [15.24] | 45 [13.72] | 42 [12.80] | 39 [11.89] | 37 [11.28] |
| 3 Ton | 5/16" | 5/16* [7.94] | 25 [7.62] | 39 [11.89] | 28 [8.53] | 16 [4.88] | 5 [1.52] | N/A |
| | | 3/8 [9.53] | 25 [7.62] | 50 [15.24] | 51 [15.54] | 48 [14.63] | 44 [13.41] | 40 [12.19] |
| 4 Ton | 3/8" | 5/16* [7.94] | 25 [7.62] | 15 [4.57] | N/A | N/A | N/A | N/A |
| | | 3/8 [9.53] | 25 [7.62] | 47 [14.33] | 40 [12.19] | 32 [9.75] | 24 [7.32] | 17 [5.18] |
| 5 Ton | 3/8" | 3/8* [9.53] | 25 [7.62] | 41 [12.50] | 30 [9.14] | 20 [6.10] | 10 [3.05] | 0 [0.00] |
| | | 1/2 [12.7] | 25 [7.62] | 50 [15.24] | 56 [17.07] | 54 [16.46] | 52 [15.85] | 50 [15.24] |

NOTES: N/A – Application not recommended.

*Standard line size.

| Suction Line Length/Size vs. Capacity Multiplier (2-Stage R-410A) | | | | | |
|---|----------------------------------|---|---|---|---|
| Unit Size | | 2 Ton | 3 Ton | 4 Ton | 5 Ton |
| Suction Line Connection Size | | 3/4" I.D. | 3/4" I.D. | 7/8" I.D. | 7/8" I.D. |
| Suction Line Run—Feet [m] | | 5/8" [15.88 mm] O.D. Standard* 3/4" [19.05 mm] O.D. Optional | 5/8" [15.88 mm] O.D. Optional 3/4" [19.05 mm] O.D. Standard* | 3/4" [19.05 mm] O.D. Optional 7/8" [22.23 mm] O.D. Standard* | 3/4" [19.05 mm] O.D. Optional 7/8" [22.23 mm] O.D. Standard* |
| 25' [7.62] | Optional Standard Optional | — 1.00 1.00 | .99 1.00 — | 1.00 1.00 — | .99 1.00 — |
| 50' [15.24] | Optional Standard Optional | — .99 1.00 | .98 .99 — | .98 .99 — | .98 .99 — |
| 100' [30.48] | Optional Standard Optional | — .97 .98 | .95 .97 — | .95 .97 — | .94 .97 — |
| 150' [45.72] | Optional Standard Optional | — .95 .97 | .91 .95 — | .93 .95 — | .91 .95 — |

NOTES: Using suction line larger than shown in chart will result in poor oil return and is not recommended.

*Standard line size.

[] Designates Metric Conversions

GENERAL TERMS OF LIMITED WARRANTY

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

For Complete Details of the Limited Warranty, Including Applicable Terms and Conditions, See Your Local Installer or Contact the Manufacturer for a Copy.

Limited Parts Warranty:

Rheem *Prestige Series™* equipment features a 10-year limited parts warranty.*

*This ten-year limited parts warranty is applicable only to single-phase products installed in residential applications.

RPRL- JEZ Conditional Replacement Warranty:

Rheem will provide a replacement RPRL-JEZ Heat Pump to the original purchaser if the compressor fails within 10 years (providing the unit is installed with a new Rheem *Prestige Series™* Air Handler OR Rheem Indoor Coil with a Rheem *Prestige Series™* Gas Furnace, and is properly matched according to Rheem specifications), and if additional conditions are satisfied. See product warranty card for additional information.

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

**Rheem Heating,
Cooling and
Water Heating**

P.O. Box 17010, Fort Smith, AR 72917



"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."