



The new degree of comfort.™



Residential Gas
Warrior DVX Water Heaters

Warrior DVX are direct vent co-axial gas water heaters for manufactured housing that are FVIR compliant

Efficiency


- .59 EF

Performance

- FHR: 78-gallons for 50-gallon model and 66-gallons for 40-gallon model
- Recovery rates: 36.4 for 40 and 50-gallon natural gas models at a 90 degree rise

Flexibility

- Field convertible controls and burner assembly for natural gas or LP operation included
- Roof jack flange adjustment range available up to 34° (8 - 12)
- New smaller foot print – no external air tube
- Can be installed anywhere in the home
- 3/4" hot and cold top connections
- Easily fits into a standard drain pan

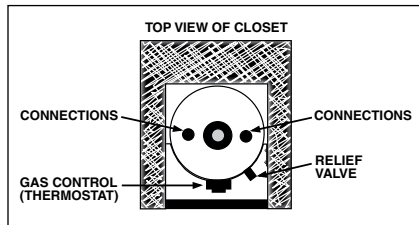

Self Cleaning

- EverKleen™ patented system fights sediment build-up

Plus...


- Certified for manufactured (HUD) and modular construction
- Factory installed temperature and pressure relief valve – side location
- Piezo ignition – easy light pilot, no matches required

Warranty

- 5-Year limited tank, 1-year limited parts warranty*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.

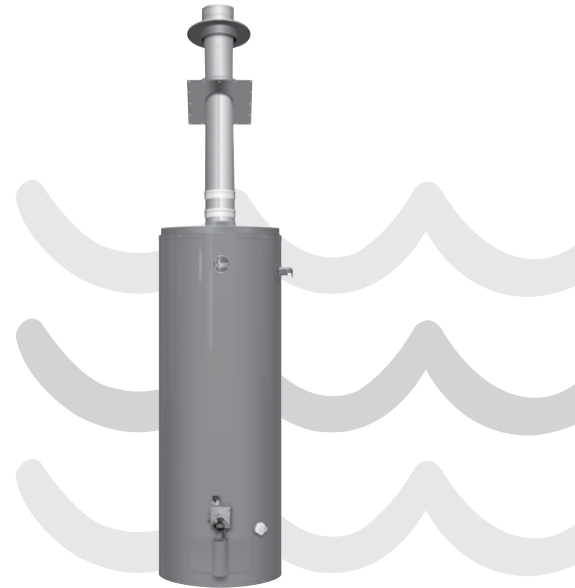

Warrior DVX
40 and 50-Gallon Capacities
Up to 36,000 Btu/h




CO-AXIAL ROOF JACK SIZING TABLE

34° MAX. (8-12 PITCH) ROOF JACK KIT PART NUMBER	ROOF JACK ADJUSTMENT RANGE (SEE X)
AP14363A	24 - 37 Inches
AP14363B	33 - 68 Inches
AP14363C	45 - 97 Inches
AP14363D	60 - 130 Inches
AP14363E	72 - 160 Inches

NOTE: 42° Max. adjustment roof jacks available.

Roof Jacks must be ordered separately with this direct vent water heater and installed in accordance with the instructions furnished with the heater. No other roof jack or vertical vent kit is approved for installation with this heater.

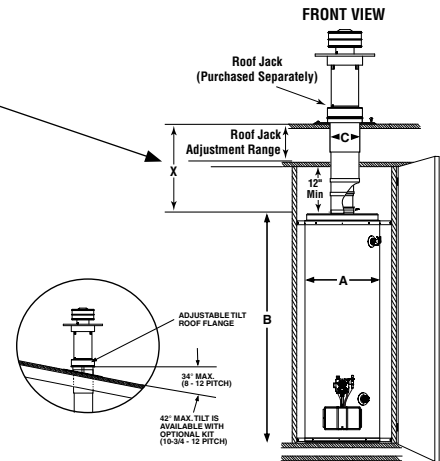

Altitude Certification

- All models certified up to 7,700 ft. above sea level

Longer Life

- Patented magnesium anode rod with resistor protects the tank from rust

TYPE	DESCRIPTION		FEATURES				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFORMATION				
	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE	FIRST HOUR DEL. G.P.H. NAT.	DIAM. A	TANK HEIGHT B	VENT SIZE C	WATER CONNECTION	SHIP. WT. (LBS)	ENERGY FACTOR NAT/LP	AVG. ANN. OPER. COSTS		
			NAT.	LP									NAT.	LP	NAT.
TALL	40	22V40FDVX	36	30	36.4	30.3	66	19-3/4	59-3/4	5	3/4	155	0.59	\$309	\$520
	50	22V50FDVX	36	32	36.4	32.3	78	21-3/4	59-1/2	5	3/4	165	0.59	\$309	\$520

Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures. D.O.E. national average fuel rate natural gas \$1.218/therm; LP \$1.87/gallon.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT