


# RUUD SALES FACT SHEET



Featuring  
New Industry Standard  
R-410A Refrigerant **R-410A**

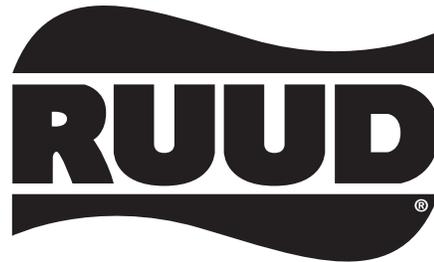

## 13PJL SERIES

### Features

- Coils constructed with copper tubing and enhanced aluminum fins
- Includes factory installed low pressure controls.
- Strong, attractive cabinet—louvered design protects the coil from damage
- Expansion Valves with Internal Check Valve—provides for quieter refrigerant metering
- Demand Defrost Control
- Non-Cycling Reversing Valve
- Hot Gas Muffler
- Service Valves
- Grille/motor mount for quiet fan operation
- Easily accessible control box
- Bi-Directional Filter Drier (shipped – not installed)
- Certified and rated under ARI Standard 240
- U.L. listed

### GENERAL TERMS OF LIMITED WARRANTY

Ruud will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

Conditional Parts Warranty* (Registration Required) .....	Ten (10) Years
Conditional Compressor* (Registration Required) .....	Ten (10) Years
Limited Parts .....	Five (5) Years

\*See Product Warranty Card for Details.

<b>13</b>	<b>P</b>	<b>J</b>	<b>L</b>	<b>18</b>	<b>A</b>	<b>01</b>
13 SEER	P = HEAT PUMP	VOLTAGE	DESIGN SERIES	NOMINAL COOLING CAPACITY	CABINET	RUUD VALUE SERIES
		J = 208-230 SINGLE PHASE	L = R-410A	18 = 18,000 BTU/HR [5.28 kW] 24 = 24,000 BTU/HR [7.03 kW] 30 = 30,000 BTU/HR [8.79 kW] 36 = 36,000 BTU/HR [10.55 kW] 42 = 42,000 BTU/HR [12.31 kW] 48 = 48,000 BTU/HR [14.07 kW] 60 = 60,000 BTU/HR [17.58 kW]	A = FULL METAL JACKET	

Price	Starting at: \$
-------	--------------------

