Heavy Duty Water Heaters

Professional Achiever Plus™ Heavy Duty gas water heaters exceed ANSI standards for flammable vapor ignition resistance

Efficiency
- .49 - .58 EF

Performance
- FHR: Up to 135 gallons for natural gas, up to 125 gallons for LP gas
- Recovery: Up to 75.8 gallons for natural gas, up to 65.7 gallons for LP gas at a 90 degree rise

Guardian System™ & Sensor
- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation

Combustion Shut-off System


Flame Arrestor Plate

Maintenance Free

Self-Cleaning
- 48, 60 & 63 gallon models only
- EverKleen™ patented system fights sediment build-up

- Reduces fuel costs
- Fights sediment build-up

Easy to Light
- Piezo Ignitor - no matches required

Low Emissions
- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

Longer Life
- Ruud exclusive R-Tech (resistored) anode rod provides long-lasting tank protection

High Altitude Compliant
- All models are certified for applications up to 7,700 feet above sea level
- Some models are certified up to 10,200 feet above sea level (check factory for listings)

Plus…
- Enhanced-flow brass drain valve
- Temperature and pressure relief valve included
- Low lead compliant
- Side water connections for space heating applications for 48, 63, 75 and 98-gallon models
- Standard replacement parts

Warranty
- 8-Year limited tank and parts warranty*
- With ProtectionPlus™ the 8-year limited tank warranty becomes 12-year

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.

2 ProClub POINTS

Professional Achiever Plus Heavy Duty

48, 60, 63, 75 and 98-Gallon Capacities
Up to 75,100 Btu/h
Natural and LP Gas

myruud.com/proclub

See dimensions chart on back.

PRINTED IN U.S.A. 09/13 WP FORM NO. PRO+G RUHD

Heavy Duty Water Heaters

Specifications

DESCRIPTION			FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)									ENERGY INFO.	
TYPE	GAL. CAP.	MODEL NUMBER	GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.		HT. TO VENT A	TANK HT. B	DIAM. C	HT. TO GAS CONN. D	VENT SIZE E	WATER CONN. CNTR. F	HT. TO SIDE T&P VALVE G	WATER CONN. SIZE H	SHIP. WT. (LBS)	ENERGY FACTOR	
			NAT.	LP	NAT.	LP	NAT.	LP										NAT.	LP
Tall	48	PRO+G48-65N RU58	65		65.7		98		62-1/2	58-1/2	21-3/4	14	4	11	51-3/4	3/4	180	0.58	
Tall	48	PRO+G48-48P RU58		48		48.5		88	62-1/2	58-1/2	21-3/4	14	4	11	51-3/4	3/4	180		0.58
Tall	60	PRO+G60-50N RU56	50		50.5		107		62	58	23	13-1/4	4	8	48-1/2	3/4	180	0.56	
Tall	60	PRO+G60-45P RU56		45		45.5		107	62	58	23	13-1/4	4	8	48-1/2	3/4	180		0.56
Tall	63	PRO+G63-65N RU55	65		65.7		115		65	61-1/4	23	14	4	11	54-3/4	3/4	225	0.55	
Tall	63	PRO+G63-50P RU55		50		50.5		110	65	61-1/4	23	14	4	11	54-3/4	3/4	225		0.55
Tall	75	PRO+G75-75N RU	75.1		75.8		141		64	60	26-1/4	14-3/4	4	11	53-1/4	1	320		
Tall	75	PRO+G75-65P RU53		65		65.7		109	64	60	26-1/4	14-3/4	4	11	53-1/4	1	320		0.53
Tall	98	PRO+G98-75N RU49	75		75.8		135		67-3/4	64	27-1/4	14-3/8	4	11	57-3/16	1	350	0.49	
Tall	98	PRO+G98-65P RU49		65		65.7		125	67-3/4	64	27-1/4	14-3/8	4	11	57-3/16	1	350		0.49

Energy Factor based on D.O.E. (Department of Energy) test procedures.

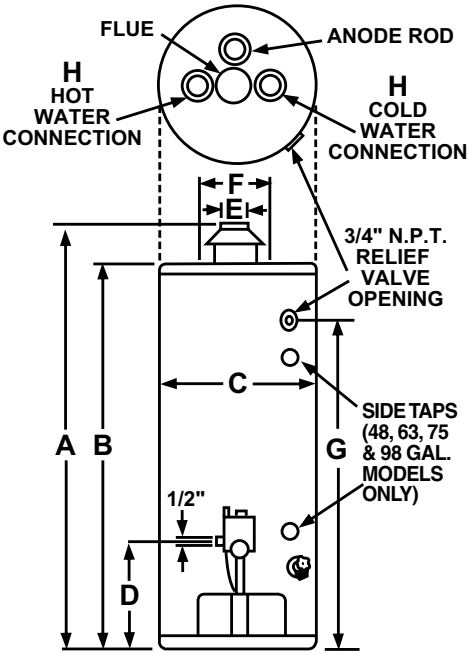

In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.