

# PERFORMANCE PLATINUM™



The new degree of comfort.™

## The PERFORMANCE PLATINUM™ atmospheric gas water heaters feature a diagnostic gas valve and a 12-year warranty

### Performance

- FHR: 94 gallons
- Recovery: 51 GPH at a 90° F rise

### Diagnostic Valve

- Self powered diagnostic gas control valve for improved monitoring and service



### Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

### Maintenance Free Burner System

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation



Combustion Shut-off System



Flame Arrestor Plate



Maintenance Free

### Longer Life

- Premium grade anode rod provides long-lasting tank protection

### Plus...


- Enhanced flow brass drain valve
- Easy to light – no matches required
- Temperature and pressure relief valve included
- Low lead compliant
- Standard replacement parts

### Warranty

- 12-Year limited warranty for tank and parts, 3-year full in-home labor warranty\*

\*See written warranty for complete details

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.

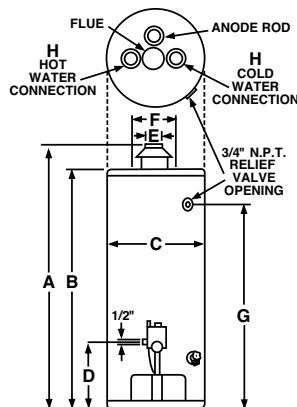

**PERFORMANCE PLATINUM**  
**Atmospheric**  
55-Gallon Capacity  
50,000 Btu/h



LEED Point = 1

## PERFORMANCE PLATINUM™ Atmospheric Gas Specifications

Fuel Type	Description	Nominal Gallon Capacity	Rated Gallon Capacity	Model Number	Gas Input in Thous. Btu/h	Recovery in G.P.H. 90° F Rise	First Hour Delivery G.P.H.	Ht. to Vent A	Tank Height B	Diam. C	Ht. to Gas Conn. D	Vent Size E	Water Conn. Center F	Ht. to Side T&P Valve G	Water Conn. Size H	Ship Weight (LBS)	Energy Factor	Uniform Energy Factor (UEF)
<b>Performance Platinum - Self Powered Diagnostic Control - High Efficiency</b>																		
Natural Gas	Tall	55	55	XG55T12EC50U0	50	51	94	59-1/4	55-7/8	23-3/4	14-1/4	3 or 4	8	48-3/4	3/4	175	0.59	0.62

Uniform Energy Factor, Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Water Heating • 101 Bell Road  
Montgomery, Alabama 36117-4305 • [www.rheem.com](http://www.rheem.com)