



Air

Package Air Conditioner
RSPM Series

The new degree of comfort.™

Rheem *Commercial Classic*® Series Package Air Conditioner



RSPM- 14-SEER Series
Nominal Sizes 2-5 Tons [7-17.6 kW]




INTEGRATED AIR & WATER

FORM NO. S11-950 REV. 4

TABLE OF CONTENTS


Unit Features & Benefits.....	3-6
Model Identification Options	7
General Data	
RSPM- Series	8-10
Performance Data	
RSPM- Cooling Series	11-14
Indoor Airflow Performance	
RSPM- Series	15-16
Electrical Data	
RSPM- Series.....	17
Electric Heater Kits	
RSPM- Series	18-19
Dimensional Data	20-21
Accessories	22
Typical Wiring	23-25
Limited Warranty	26

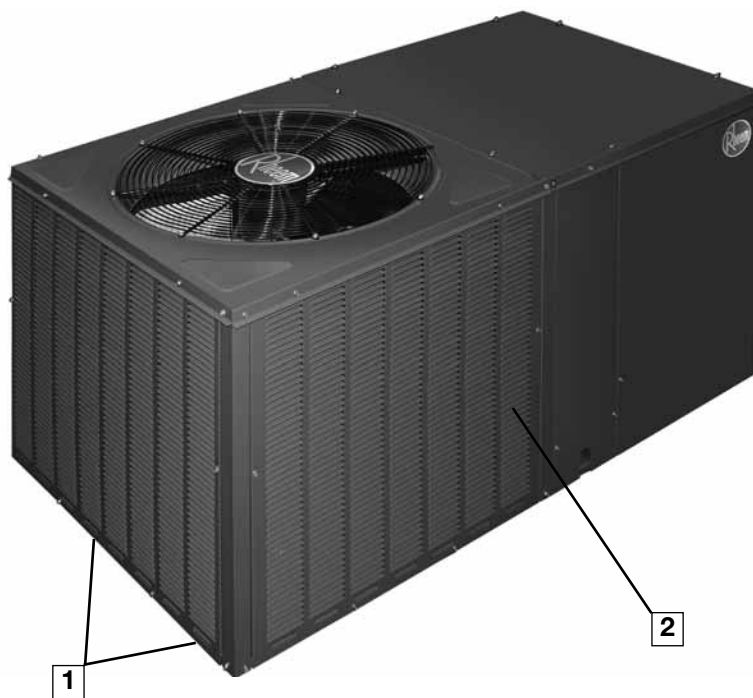


The RSPM series of Package Air Conditioners are designed to be the most efficient, quickest to install, easiest to service, and most reliable units in the industry - while still maintaining an affordable price. This platform provides you with a full line of nominal capacities from 2 through 5 tons utilizing earth-friendly R-410A refrigerant. This unit is suitable for use in mobile homes, manufactured housing and conventionally constructed residential and commercial buildings where horizontally-ducted systems are preferred. RSPM models are 14 SEER, each AHRI-certified.

Starting at the bottom, the base rails (1) allow for separation between the unit base and the ground level, protecting the base from ground moisture and providing air circulation around the unit. Constructed from sturdy 14-gauge G-90 sheet metal, the base rails also allow for easier maneuverability during installation.

As with all units offered by Rheem, we started our design process with input from the customer. From fan grille to the base rails, Rheem has combined 30 years worth of package unit design experience with input from Dealers to meet the latest application requirements.

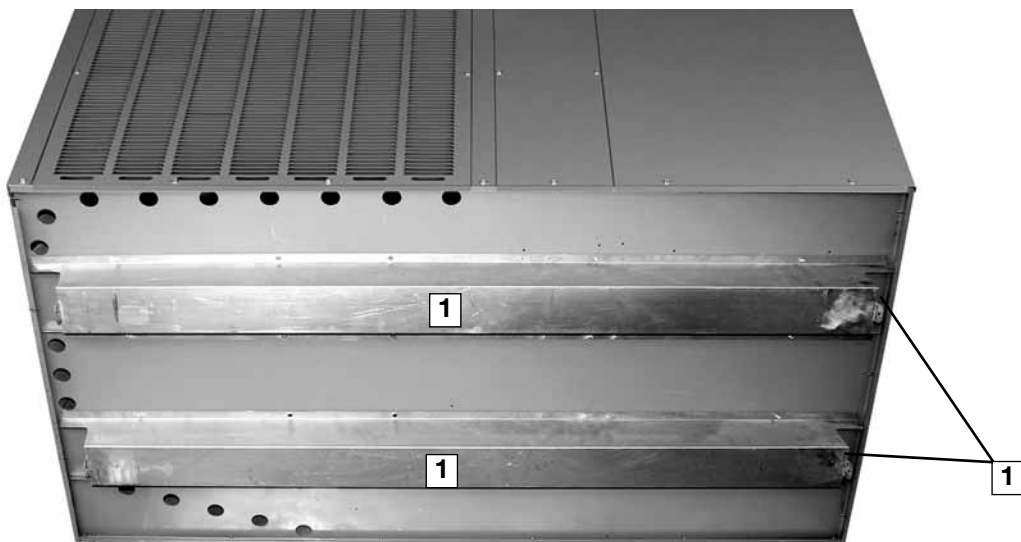

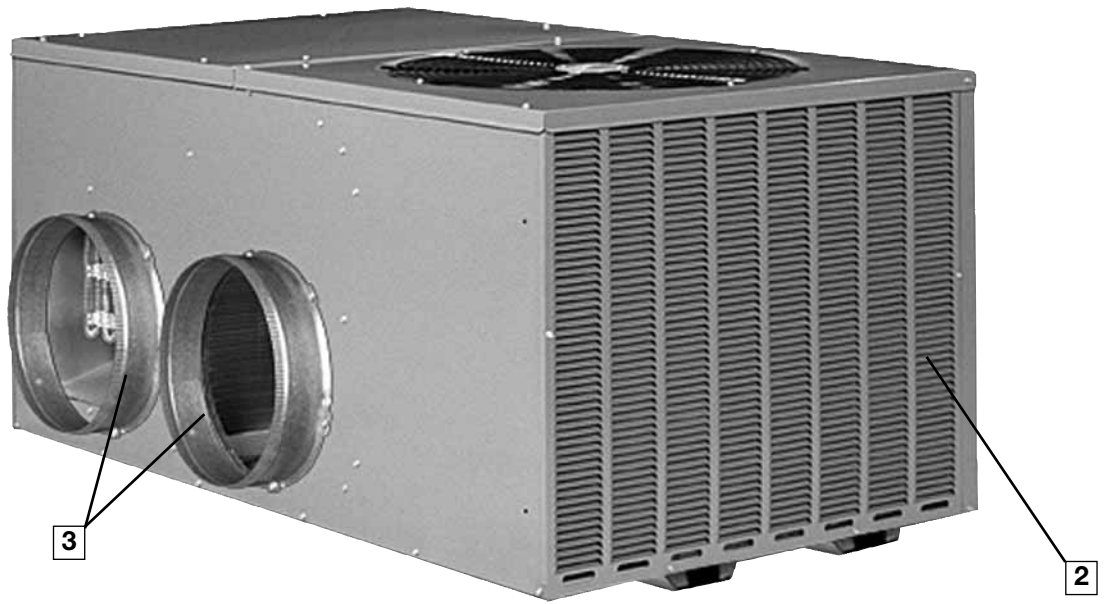


To provide flexibility in space-limited installations, the unit can be installed flush to the structure without blocking airflow over the outdoor coil or making any screws inaccessible for maintenance. Furthermore, the cabinet is a slim 33" wide. Full-louver coil protection (2) makes Rheem unique in the industry and also totally protects the outdoor coil from vandalism and weather extremes.

Two round 14" duct collar (3) are included with the unit, which makes attaching duct a snap. The collar is crimped around the leading edge, making it easier to install duct onto the collar. A metal bead around the circumference prevents the attached ducting from sliding off after installation.

Keeping service technicians in mind, Rheem takes pride providing easy access to internal components. The outdoor-section top cover (4) is easily removed to allow access to the scroll compressor (5), outdoor fan motor (6), and refrigerant tubing (7).




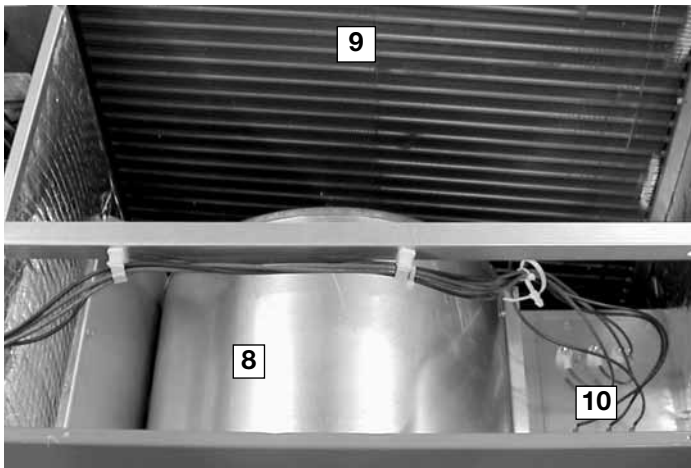


The indoor-section top cover also easily opens to access the removable blower housing and motor (8). This also gains total access to the indoor coil for cleaning and service (9).

The indoor motor and blower system will achieve nominal 400 CFM per ton up to a minimum of .8 inches of static pressure, which helps to eliminate customer dissatisfaction over poor airflow brought about by high-static duct designs.


Optional electric heat (10) can be specified as factory installed, or can be easily installed in the field, with either dual- or single-point power connections.

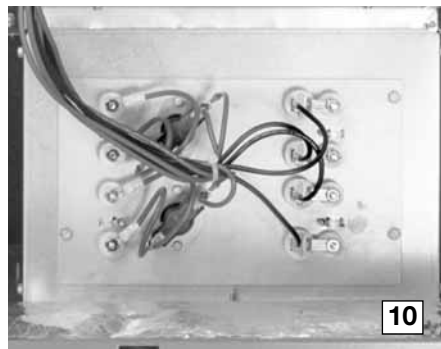

The controls are located in a large, easy-to-access control box (11), which provides plenty of space in which to troubleshoot. The transformer (12) is protected by an in-line fuse, which protects the transformer during a low-voltage electrical short. The low-voltage (13) and high-voltage (14) wiring connections are easily accessed and have ample room around which to maneuver. Troubleshooting is further aided with number- and color-coded wiring, which corresponds with the large, easy-to-read wiring diagram located on the inside of the control box access panel.

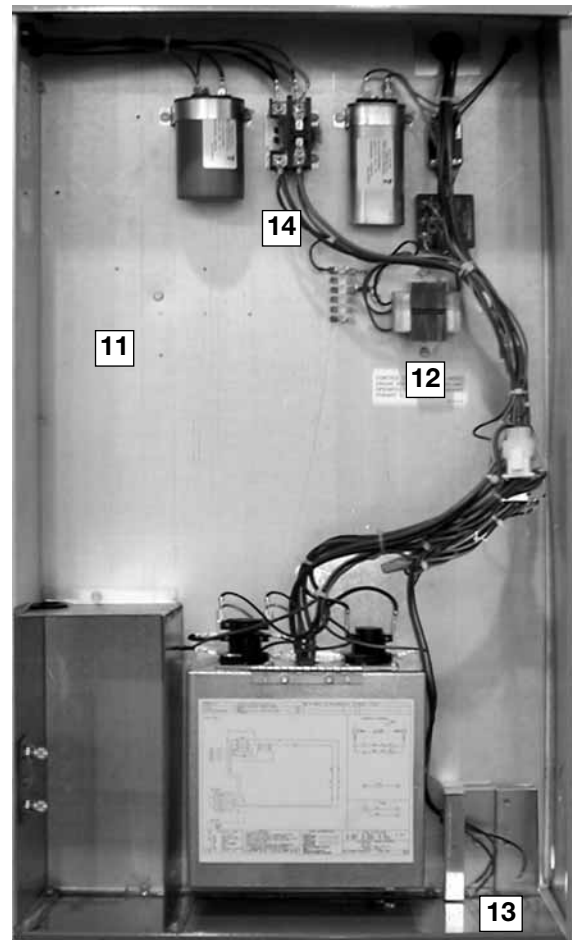

High and low refrigerant pressure can easily and accurately be measured using the two gauge ports (15) located inside the control box.



Foil-faced insulation is securely glued and captured to the cabinet. On the base of the unit, closed-cell insulation is used to prevent moisture from being absorbed and help reduce mold content to provide better indoor air quality.

For reliability and long-lasting operation, Rheem uses 100% scroll compressor technology (18) on all package platforms. With over 12 years of history, the scroll compressor has proven to be reliable, efficient, and quiet during operation.




A small side panel grants access to a removable, sloped drain pan (16), which helps to ensure indoor air quality (IAQ) throughout the life of the unit. A 3/4" drain trap (17) assembly is provided for convenience.



“Patent 7,430,877”



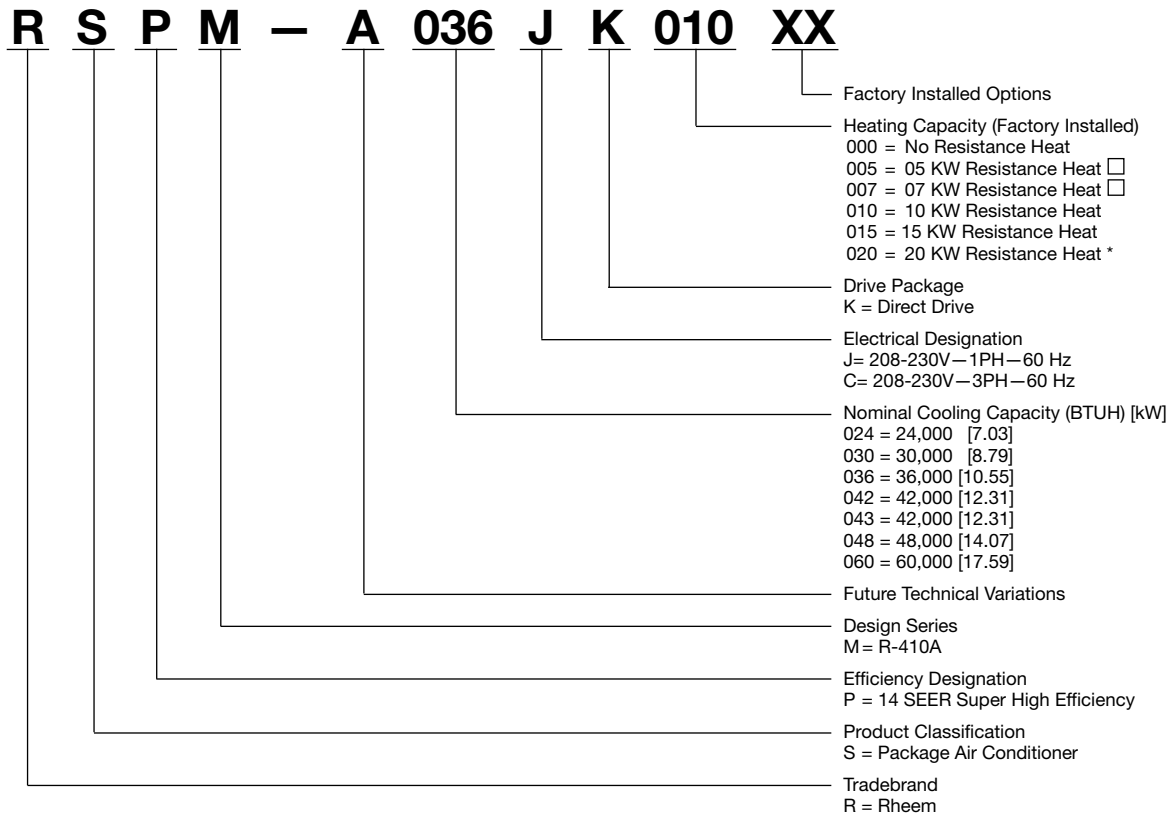

Not available in 3 phase models.
 *Available in 3¹/₂, 4 and 5 ton models.

[] Designates Metric Conversions

Instructions for Factory Installed Option(s) Selection

Note: Three characters following the model number will be utilized to designate a factory-installed option or combination of options. If no factory option(s) is required, nothing follows the model number.

Step 1. After a basic rooftop model is selected, choose a *three-character* option code from the **FACTORY INSTALLED OPTION SELECTION TABLE**.

FACTORY INSTALLED OPTION CODES

Option Codes	Description
AU	Tin Plated Hairpin Coil
115	For Export Only

"x" indicates factory installed option.

Example: No Option

RSPM-A036JK010

Example: Option with Stainless Steel Heat Exchanger

RSPM-A036JK010AU

Note: Factory installed economizer is not available on these models.

NOMINAL SIZES 2-5 TON [7-17.6 kW]

Model RSPM- Series	A024JK	A030JK	A036CK	A036JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	25,200 [7.38]	30,400 [8.91]	37,600 [11.02]	37,600 [11.02]
EER/SEER ²	12.4/14	12.25/14	12.2/14	12.2/14
Nominal CFM/AHRI Rated CFM [L/s]	800/800 [378/378]	1000/1000 [472/472]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	24,200 [7.09]	29,200 [8.56]	36,200 [10.61]	36,200 [10.61]
Net Sensible Capacity Btu [kW]	18,800 [5.51]	23,000 [6.74]	27,700 [8.12]	27,700 [8.12]
Net Latent Capacity Btu [kW]	5,400 [1.58]	6,200 [1.82]	8,500 [2.49]	8,500 [2.49]
Net System Power kW	1.95	2.38	2.97	2.97
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	10.44 [0.97]	12.64 [1.17]	12.65 [1.18]	12.65 [1.18]
Rows / FPI [FPcm]	1 / 20 [8]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	4.33 [0.4]	4.33 [0.4]	4.33 [0.4]	4.33 [0.4]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3400 [1604]	3400 [1604]	3400 [1604]	3400 [1604]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	875	875	875	875
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	1/4	1/3	1/2	1/2
Motor RPM (Nominal)	1050	1050	1050	1050
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x20x16 [25x508x406]	(1)1x20x20 [25x508x508]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)	70 [1984]	78 [2211]	78 [2211]	78 [2211]
Weights				
Net Weight lbs. [kg]	304 [138]	306 [139]	309 [140]	309 [140]
Ship Weight lbs. [kg]	328 [149]	330 [150]	333 [151]	333 [151]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.

NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RSPM- Series	A042CK	A042JK	A043CK	A043JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	43,500 [12.75]	43,500 [12.75]	43,000 [12.6]	43,000 [12.6]
EER/SEER ²	11.85/14	11.85/14	12/14	12/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1400 [661/661]	1400/1400 [661/661]	1400/1400 [661/661]	1400/1400 [661/661]
AHRI Net Cooling Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Sensible Capacity Btu [kW]	32,500 [9.52]	32,500 [9.52]	32,000 [9.38]	32,000 [9.38]
Net Latent Capacity Btu [kW]	9,500 [2.78]	9,500 [2.78]	10,000 [2.93]	10,000 [2.93]
Net System Power kW	3.53	3.53	3.5	3.5
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	12.65 [1.18]	12.65 [1.18]	12.65 [1.18]	12.65 [1.18]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3400 [1604]	3400 [1604]	3400 [1604]	3400 [1604]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	875	875	850	850
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279x229]	1/11x9 [279x229]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM (Nominal)	1050	1050	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)	86 [2438]	86 [2438]	86 [2438]	86 [2438]
Weights				
Net Weight lbs. [kg]	333 [151]	333 [151]	333 [151]	333 [151]
Ship Weight lbs. [kg]	357 [162]	357 [162]	357 [162]	357 [162]

[] Designates Metric Conversions

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
- Standard 3/4" PVC P-Trap provided.

NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RSPM- Series	A048CK	A048JK	A060CK	A060JK
Cooling Performance¹				
Gross Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	64,000 [18.75]	64,000 [18.75]
EER/SEER ²	12.6/14	12.6/14	12.35/14	12.35/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	47,000 [13.77]	47,000 [13.77]	61,000 [17.87]	61,000 [17.87]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	45,500 [13.33]	45,500 [13.33]
Net Latent Capacity Btu [kW]	10,600 [3.11]	10,600 [3.11]	15,500 [4.54]	15,500 [4.54]
Net System Power kW	3.61	3.61	4.94	4.94
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³				
	78	78	78	78
Outdoor Coil—Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
Tube Size in. [mm] OD	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.54 [1.54]	16.54 [1.54]	16.54 [1.54]	16.54 [1.54]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	4 / 13 [5]	4 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type				
Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	4200 [1982]	4200 [1982]	4000 [1888]	4000 [1888]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type				
Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM (Nominal)	1050	1050	1050	1050
Motor Frame Size	48	48	48	48
Filter—Type				
Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)				
	114 [3232]	114 [3232]	178 [5046]	178 [5046]
Weights				
Net Weight lbs. [kg]	349 [158]	349 [158]	364 [165]	364 [165]
Ship Weight lbs. [kg]	375 [170]	375 [170]	390 [177]	390 [177]

[] Designates Metric Conversions

NOTES:

- Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
- EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
- Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
- Standard 3/4" PVC P-Trap provided.



GROSS SYSTEMS PERFORMANCE DATA—RSPM-A024

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		960 [453]	800 [378]	640 [302]	960 [453]	800 [378]	640 [302]	960 [453]	800 [378]	640 [302]	
DR ①		.10	.06	.01	.10	.06	.01	.10	.06	.01	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	30.9 [9.06] 19.4 [5.69] 1.4	29.8 [8.73] 17.8 [5.22] 1.3	28.7 [8.41] 16.1 [4.72] 1.3	29.0 [8.50] 22.9 [6.71] 1.4	28.0 [8.21] 20.9 [6.13] 1.3	26.9 [7.88] 19.0 [5.57] 1.3	27.3 [8.00] 26.3 [7.71] 1.4	26.4 [7.74] 24.0 [7.03] 1.3	25.4 [7.44] 21.8 [6.39] 1.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	30.2 [8.85] 19.1 [5.60] 1.4	29.2 [8.56] 17.5 [5.13] 1.4	28.1 [8.24] 15.9 [4.66] 1.4	28.3 [8.29] 22.6 [6.62] 1.4	27.3 [8.00] 20.7 [6.07] 1.4	26.3 [7.71] 18.7 [5.48] 1.4	26.7 [7.83] 26.0 [7.62] 1.4	25.7 [7.53] 23.7 [6.95] 1.4	24.8 [7.27] 21.5 [6.30] 1.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	29.5 [8.65] 18.8 [5.51] 1.5	28.5 [8.35] 17.2 [5.04] 1.5	27.4 [8.03] 15.6 [4.57] 1.5	27.6 [8.09] 22.3 [6.54] 1.5	26.6 [7.80] 20.4 [5.98] 1.5	25.7 [7.53] 18.5 [5.42] 1.5	26.0 [7.62] 25.6 [7.50] 1.5	25.1 [7.36] 23.5 [6.89] 1.5	24.1 [7.06] 21.3 [6.24] 1.5
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	28.8 [8.44] 18.5 [5.42] 1.6	27.7 [8.12] 16.9 [4.95] 1.6	26.7 [7.83] 15.3 [4.48] 1.6	26.8 [7.85] 21.9 [6.42] 1.6	25.9 [7.59] 20.1 [5.89] 1.6	25.0 [7.33] 18.2 [5.33] 1.6	25.2 [7.39] 25.2 [7.39] 1.6	24.3 [7.12] 23.1 [6.77] 1.6	23.4 [6.86] 21.0 [6.15] 1.6
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	27.9 [8.18] 18.1 [5.30] 1.7	27.0 [7.91] 16.6 [4.86] 1.7	26.0 [7.62] 15.0 [4.40] 1.7	26.0 [7.62] 21.6 [6.33] 1.7	25.1 [7.36] 19.7 [5.77] 1.7	24.2 [7.09] 17.9 [5.25] 1.7	24.4 [7.15] 24.4 [7.15] 1.7	23.5 [6.89] 22.9 [6.71] 1.7	22.7 [6.65] 20.7 [6.07] 1.7
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	27.1 [7.94] 17.7 [5.19] 1.8	26.1 [7.65] 16.2 [4.75] 1.8	25.2 [7.39] 14.7 [4.31] 1.7	25.2 [7.39] 21.1 [6.18] 1.8	24.3 [7.12] 19.3 [5.66] 1.8	23.4 [6.86] 17.5 [5.13] 1.7	23.5 [6.89] 23.5 [6.89] 1.8	22.7 [6.65] 22.4 [6.56] 1.8	21.9 [6.42] 20.3 [5.95] 1.7
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	26.1 [7.65] 17.2 [5.04] 1.9	25.2 [7.39] 15.7 [4.60] 1.9	24.3 [7.12] 14.3 [4.19] 1.8	24.2 [7.09] 20.7 [6.07] 1.9	23.4 [6.86] 18.9 [5.54] 1.9	22.5 [6.59] 17.2 [5.04] 1.8	22.6 [6.62] 22.6 [6.62] 1.9	21.8 [6.39] 21.8 [6.39] 1.9	21.0 [6.15] 19.9 [5.83] 1.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	25.1 [7.36] 16.7 [4.89] 2.0	24.2 [7.09] 15.3 [4.48] 1.9	23.4 [6.86] 13.8 [4.04] 1.9	23.2 [6.80] 20.2 [5.92] 2.0	22.4 [6.56] 18.4 [5.39] 1.9	21.6 [6.33] 16.7 [4.89] 1.9	21.6 [6.33] 21.6 [6.33] 2.0	20.8 [6.10] 20.8 [6.10] 1.9	20.1 [5.89] 19.5 [5.71] 1.9
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	24.0 [7.03] 16.1 [4.72] 2.1	23.2 [6.80] 14.7 [4.31] 2.0	22.3 [6.54] 13.3 [3.90] 2.0	22.1 [6.48] 19.6 [5.74] 2.1	21.4 [6.27] 17.9 [5.25] 2.0	20.6 [6.04] 16.2 [4.75] 2.0	20.5 [6.01] 20.5 [6.01] 2.1	19.8 [5.80] 19.8 [5.80] 2.0	19.1 [5.60] 19.0 [5.57] 2.0

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A030

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1200 [566]	1000 [472]	800 [378]	1200 [566]	1000 [472]	800 [378]	1200 [566]	1000 [472]	800 [378]	
DR ①		.11	.07	.02	.11	.07	.02	.11	.07	.02	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	37.8 [11.08] 23.5 [6.89] 1.7	36.5 [10.70] 21.5 [6.30] 1.6	35.1 [10.29] 19.5 [5.71] 1.6	35.0 [10.26] 27.8 [8.15] 1.7	33.8 [9.91] 25.4 [7.44] 1.6	32.6 [9.55] 23.1 [6.77] 1.6	33.1 [9.70] 31.0 [9.09] 1.7	31.9 [9.35] 28.4 [8.32] 1.6	30.7 [9.00] 25.8 [7.56] 1.6
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	37.2 [10.90] 23.3 [6.83] 1.8	35.9 [10.52] 21.3 [6.24] 1.7	34.6 [10.14] 19.3 [5.66] 1.7	34.4 [10.08] 27.7 [8.12] 1.8	33.2 [9.73] 25.3 [7.41] 1.7	32.0 [9.38] 22.9 [6.71] 1.7	32.5 [9.52] 31.0 [9.09] 1.8	31.4 [9.20] 28.3 [8.29] 1.7	30.2 [8.85] 25.6 [7.50] 1.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	36.4 [10.67] 23.0 [6.74] 1.9	35.1 [10.29] 21.0 [6.15] 1.8	33.8 [9.91] 19.1 [5.60] 1.8	33.6 [9.85] 27.3 [8.00] 1.9	32.4 [9.50] 25.0 [7.33] 1.8	31.2 [9.14] 22.7 [6.65] 1.8	31.7 [9.29] 30.7 [9.00] 1.9	30.6 [8.97] 28.0 [8.21] 1.8	29.4 [8.62] 25.4 [7.44] 1.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	35.3 [10.35] 22.5 [6.59] 2.0	34.1 [9.99] 20.6 [6.04] 2.0	32.9 [9.64] 18.7 [5.48] 1.9	32.6 [9.55] 26.9 [7.88] 2.0	31.4 [9.20] 24.6 [7.21] 2.0	30.3 [8.88] 22.3 [6.54] 1.9	30.6 [8.97] 30.1 [8.82] 2.0	29.6 [8.67] 27.6 [8.09] 2.0	28.5 [8.35] 25.0 [7.33] 1.9
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	34.2 [10.02] 22.0 [6.45] 2.1	33.0 [9.67] 20.1 [5.89] 2.1	31.8 [9.32] 18.2 [5.33] 2.0	31.4 [9.20] 26.4 [7.74] 2.1	30.3 [8.88] 24.1 [7.06] 2.1	29.2 [8.56] 21.9 [6.42] 2.0	29.5 [8.65] 29.5 [8.65] 2.1	28.4 [8.32] 27.1 [7.94] 2.1	27.4 [8.03] 24.5 [7.18] 2.0
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	33.0 [9.67] 21.4 [6.27] 2.2	31.8 [9.32] 19.6 [5.74] 2.2	30.7 [9.00] 17.8 [5.22] 2.1	30.2 [8.85] 25.8 [7.56] 2.2	29.1 [8.53] 23.6 [6.92] 2.2	28.1 [8.24] 21.4 [6.27] 2.1	28.3 [8.29] 28.3 [8.29] 2.2	27.3 [8.00] 26.5 [7.77] 2.2	26.3 [7.71] 24.1 [7.06] 2.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	31.8 [9.32] 20.8 [6.10] 2.3	30.7 [9.00] 19.1 [5.60] 2.3	29.6 [8.67] 17.3 [5.07] 2.2	29.0 [8.50] 25.2 [7.39] 2.3	28.0 [8.21] 23.0 [6.74] 2.3	27.0 [7.91] 20.9 [6.13] 2.3	27.1 [7.94] 27.1 [7.94] 2.3	26.1 [7.65] 26.0 [7.62] 2.3	25.2 [7.39] 23.6 [6.92] 2.2
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	30.7 [9.00] 20.3 [5.95] 2.4	29.7 [8.70] 18.6 [5.45] 2.4	28.6 [8.38] 16.8 [4.92] 2.3	28.0 [8.21] 24.6 [7.21] 2.4	27.0 [7.91] 22.5 [6.59] 2.4	26.0 [7.62] 20.4 [5.98] 2.3	26.0 [7.62] 26.0 [7.62] 2.4	25.1 [7.36] 25.1 [7.36] 2.4	24.2 [7.09] 23.1 [6.77] 2.3
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	29.8 [8.73] 19.8 [5.80] 2.5	28.8 [8.44] 18.1 [5.30] 2.5	27.8 [8.15] 16.4 [4.81] 2.4	27.1 [7.94] 24.2 [7.09] 2.5	26.1 [7.65] 22.1 [6.48] 2.5	25.2 [7.39] 20.0 [5.86] 2.4	25.1 [7.36] 25.1 [7.36] 2.5	24.3 [7.12] 24.3 [7.12] 2.5	23.4 [6.86] 22.7 [6.65] 2.4

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions





GROSS SYSTEMS PERFORMANCE DATA—RSPM-A036

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1440 [680]	1200 [566]	960 [453]	1440 [680]	1200 [566]	960 [453]	1440 [680]	1200 [566]	960 [453]	
DR ①		.12	.09	.04	.12	.09	.04	.12	.09	.04	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	34.5 [10.11] 21.1 [6.18] 2.1	33.3 [9.76] 19.3 [5.66] 2.0	32.0 [9.38] 17.5 [5.13] 2.0	31.6 [9.26] 26.6 [7.80] 2.1	30.5 [8.94] 24.3 [7.12] 2.0	29.4 [8.62] 22.1 [6.48] 2.0	29.1 [8.53] 29.1 [8.53] 2.0	28.1 [8.24] 28.1 [8.24] 2.0	27.1 [7.94] 26.1 [7.65] 2.0
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	43.1 [12.63] 26.6 [7.80] 2.2	41.6 [12.19] 24.3 [7.12] 2.2	40.1 [11.75] 22.0 [6.45] 2.1	40.3 [11.81] 32.1 [9.41] 2.2	38.9 [11.40] 29.3 [8.59] 2.2	37.5 [10.99] 26.6 [7.80] 2.1	37.8 [11.08] 37.8 [11.08] 2.2	36.4 [10.67] 36.4 [10.67] 2.1	35.1 [10.29] 30.6 [8.97] 2.1
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	46.1 [13.51] 28.6 [8.38] 2.3	44.5 [13.04] 26.2 [7.68] 2.3	42.9 [12.57] 23.7 [6.95] 2.3	43.3 [12.69] 34.1 [9.99] 2.3	41.8 [12.25] 31.2 [9.14] 2.3	40.3 [11.81] 28.3 [8.29] 2.3	40.8 [11.96] 40.8 [11.96] 2.3	39.4 [11.55] 39.4 [11.55] 2.3	37.9 [11.11] 32.3 [9.47] 2.2
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	45.1 [13.22] 28.2 [8.26] 2.5	43.6 [12.78] 25.8 [7.56] 2.4	42.0 [12.31] 23.4 [6.86] 2.4	42.3 [12.40] 33.7 [9.88] 2.5	40.8 [11.96] 30.8 [9.03] 2.4	39.4 [11.55] 27.9 [8.18] 2.4	39.8 [11.66] 39.8 [11.66] 2.5	38.4 [11.25] 38.4 [11.25] 2.4	37.0 [10.84] 31.9 [9.35] 2.4
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	41.7 [12.22] 26.3 [7.71] 2.6	40.3 [11.81] 24.0 [7.03] 2.6	38.8 [11.37] 21.8 [6.39] 2.5	38.9 [11.40] 31.8 [9.32] 2.6	37.6 [11.02] 29.1 [8.53] 2.6	36.2 [10.61] 26.4 [7.74] 2.5	36.4 [10.67] 36.4 [10.67] 2.6	35.1 [10.29] 35.1 [10.29] 2.5	33.8 [9.91] 30.4 [8.91] 2.5
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	37.6 [11.02] 23.9 [7.00] 2.8	36.3 [10.64] 21.9 [6.42] 2.7	34.9 [10.23] 19.8 [5.80] 2.7	34.8 [10.20] 29.4 [8.62] 2.7	33.5 [9.82] 26.9 [7.88] 2.7	32.3 [9.47] 24.4 [7.15] 2.7	32.2 [9.44] 32.2 [9.44] 2.7	31.1 [9.11] 31.1 [9.11] 2.7	30.0 [8.79] 28.4 [8.32] 2.6
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	34.3 [10.05] 22.1 [6.48] 2.9	33.1 [9.70] 20.2 [5.92] 2.8	31.9 [9.35] 18.3 [5.36] 2.8	31.5 [9.23] 27.6 [8.09] 2.9	30.4 [8.91] 25.2 [7.39] 2.8	29.3 [8.59] 22.9 [6.71] 2.8	28.9 [8.47] 28.9 [8.47] 2.9	27.9 [8.18] 27.9 [8.18] 2.8	26.9 [7.88] 26.9 [7.88] 2.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	33.5 [9.82] 21.8 [6.39] 3.0	32.3 [9.47] 19.9 [5.83] 3.0	31.1 [9.11] 18.0 [5.28] 2.9	30.7 [9.00] 27.3 [8.00] 3.0	29.6 [8.67] 24.9 [7.30] 3.0	28.5 [8.35] 22.6 [6.62] 2.9	28.1 [8.24] 28.1 [8.24] 3.0	27.1 [7.94] 27.1 [7.94] 3.0	26.1 [7.65] 26.1 [7.65] 2.9
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	36.8 [10.79] 23.9 [7.00] 3.2	35.5 [10.40] 21.9 [6.42] 3.1	34.2 [10.02] 19.9 [5.83] 3.1	34.0 [9.96] 29.4 [8.62] 3.2	32.8 [9.61] 26.9 [7.88] 3.1	31.6 [9.26] 24.4 [7.15] 3.1	31.4 [9.20] 31.4 [9.20] 3.1	30.3 [8.88] 30.3 [8.88] 3.1	29.2 [8.56] 29.2 [8.56] 3.0

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A042

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	
DR ①		.11	.07	.03	.11	.07	.03	.11	.07	.03	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	54.2 [15.88] 34.3 [10.05] 2.4	52.3 [15.33] 31.3 [9.17] 2.3	50.4 [14.77] 28.4 [8.32] 2.3	51.1 [14.98] 40.5 [11.87] 2.4	49.3 [14.45] 37.1 [10.87] 2.3	47.5 [13.92] 33.6 [9.85] 2.3	48.6 [14.24] 46.7 [13.69] 2.3	46.9 [13.75] 42.7 [12.51] 2.3	45.2 [13.25] 38.7 [11.34] 2.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	52.6 [15.42] 33.3 [9.76] 2.6	50.7 [14.86] 30.4 [8.91] 2.5	48.9 [14.33] 27.6 [8.09] 2.5	49.5 [14.51] 39.5 [11.58] 2.5	47.8 [14.01] 36.2 [10.61] 2.5	46.1 [13.51] 32.8 [9.61] 2.5	47.0 [13.77] 45.8 [13.42] 2.5	45.3 [13.28] 41.8 [12.25] 2.5	43.7 [12.81] 37.9 [11.11] 2.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	51.1 [14.98] 32.4 [9.50] 2.7	49.3 [14.45] 29.7 [8.70] 2.7	47.5 [13.92] 26.9 [7.88] 2.7	48.0 [14.07] 38.7 [11.34] 2.7	46.4 [13.60] 35.4 [10.37] 2.7	44.7 [13.10] 32.1 [9.41] 2.6	45.5 [13.33] 44.9 [13.16] 2.7	43.9 [12.87] 41.0 [12.02] 2.7	42.3 [12.40] 37.2 [10.90] 2.6
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	49.7 [14.57] 31.7 [9.29] 2.9	47.9 [14.04] 29.0 [8.50] 2.9	46.2 [13.54] 26.3 [7.71] 2.8	46.6 [13.66] 38.0 [11.14] 2.9	45.0 [13.19] 34.7 [10.17] 2.9	43.3 [12.69] 31.5 [9.23] 2.8	44.1 [12.92] 44.1 [12.92] 2.9	42.5 [12.46] 40.4 [11.84] 2.8	41.0 [12.02] 36.6 [10.73] 2.8
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	48.3 [14.16] 31.1 [9.11] 3.1	46.6 [13.66] 28.4 [8.32] 3.1	44.9 [13.16] 25.8 [7.56] 3.0	45.2 [13.25] 37.3 [10.93] 3.1	43.6 [12.78] 34.1 [9.99] 3.0	42.1 [12.34] 31.0 [9.09] 3.0	42.7 [12.51] 42.7 [12.51] 3.1	41.2 [12.07] 39.9 [11.69] 3.0	39.7 [11.63] 36.1 [10.58] 3.0
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	46.9 [13.75] 30.4 [8.91] 3.3	45.2 [13.25] 27.8 [8.15] 3.2	43.6 [12.78] 25.2 [7.39] 3.2	43.8 [12.84] 36.7 [10.76] 3.3	42.3 [12.40] 33.6 [9.85] 3.2	40.8 [11.96] 30.4 [8.91] 3.2	41.3 [12.10] 41.3 [12.10] 3.3	39.8 [11.66] 39.2 [11.49] 3.2	38.4 [11.25] 35.6 [10.43] 3.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	45.4 [13.31] 29.8 [8.73] 3.5	43.8 [12.84] 27.3 [8.00] 3.4	42.2 [12.37] 24.7 [7.24] 3.4	42.4 [12.43] 36.1 [10.58] 3.5	40.9 [11.99] 33.0 [9.67] 3.4	39.4 [11.55] 29.9 [8.76] 3.4	39.8 [11.66] 39.8 [11.66] 3.4	38.4 [11.25] 38.4 [11.25] 3.4	37.0 [10.84] 35.1 [10.29] 3.3
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	43.9 [12.87] 29.2 [8.56] 3.7	42.4 [12.43] 26.7 [7.83] 3.6	40.8 [11.96] 24.2 [7.09] 3.5	40.9 [11.99] 35.4 [10.37] 3.7	39.4 [11.55] 32.4 [9.50] 3.6	38.0 [11.14] 29.4 [8.62] 3.5	38.3 [11.22] 38.3 [11.22] 3.6	37.0 [10.84] 37.0 [10.84] 3.6	35.6 [10.43] 34.5 [10.11] 3.5
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	42.3 [12.40] 28.5 [8.35] 3.8	40.8 [11.96] 26.0 [7.62] 3.8	39.3 [11.52] 23.6 [6.92] 3.7	39.3 [11.52] 34.7 [10.17] 3.8	37.9 [11.11] 31.8 [9.32] 3.8	36.5 [10.70] 28.8 [8.44] 3.7	36.7 [10.76] 36.7 [10.76] 3.8	35.4 [10.37] 35.4 [10.37] 3.7	34.1 [9.99] 33.9 [9.94] 3.7

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions





GROSS SYSTEMS PERFORMANCE DATA—RSPM-A043CK

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	51.7 [15.2] 31.5 [9.2] 2.6	49.9 [14.6] 27.0 [7.9] 2.6	48.1 [14.1] 22.8 [6.7] 2.5	49.5 [14.5] 39.5 [11.6] 2.6	47.7 [14.0] 34.3 [10.1] 2.6	46.0 [13.5] 29.6 [8.7] 2.5	46.4 [13.6] 43.4 [12.7] 2.6	44.8 [13.1] 38.1 [11.2] 2.5	43.2 [12.7] 33.1 [9.7] 2.5
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.6 [14.8] 31.3 [9.2] 2.8	48.8 [14.3] 26.8 [7.9] 2.7	47.0 [13.8] 22.7 [6.7] 2.7	48.4 [14.2] 39.3 [11.5] 2.8	46.7 [13.7] 34.2 [10.0] 2.7	45.0 [13.2] 29.5 [8.7] 2.7	45.4 [13.3] 43.3 [12.7] 2.7	43.8 [12.8] 38.0 [11.1] 2.7	42.2 [12.4] 33.0 [9.7] 2.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	49.4 [14.5] 30.9 [9.1] 3.0	47.7 [14.0] 26.6 [7.8] 2.9	45.9 [13.5] 22.5 [6.6] 2.9	47.2 [13.8] 38.9 [11.4] 2.9	45.5 [13.3] 33.9 [9.9] 2.9	43.9 [12.9] 29.3 [8.6] 2.8	44.2 [13.0] 43.0 [12.6] 2.9	42.6 [12.5] 37.7 [11.1] 2.9	41.1 [12.0] 32.8 [9.6] 2.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	48.1 [14.1] 30.4 [8.9] 3.1	46.4 [13.6] 26.1 [7.7] 3.1	44.7 [13.1] 22.1 [6.5] 3.0	45.9 [13.5] 38.4 [11.3] 3.1	44.2 [13.0] 33.4 [9.8] 3.1	42.6 [12.5] 28.8 [8.5] 3.0	42.8 [12.5] 42.3 [12.4] 3.1	41.3 [12.1] 37.2 [10.9] 3.0	39.8 [11.7] 32.4 [9.5] 3.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	46.6 [13.7] 29.6 [8.7] 3.3	45.0 [13.2] 25.5 [7.5] 3.3	43.3 [12.7] 21.6 [6.3] 3.2	44.4 [13.0] 37.6 [11.0] 3.3	42.8 [12.5] 32.8 [9.6] 3.3	41.3 [12.1] 28.4 [8.3] 3.2	41.4 [12.1] 41.4 [12.1] 3.3	39.9 [11.7] 36.6 [10.7] 3.2	38.5 [11.3] 31.9 [9.4] 3.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.0 [13.2] 28.8 [8.5] 3.5	43.5 [12.7] 24.8 [7.3] 3.5	41.9 [12.3] 21.0 [6.2] 3.4	42.8 [12.5] 36.7 [10.8] 3.5	41.3 [12.1] 32.1 [9.4] 3.4	39.8 [11.7] 27.7 [8.1] 3.4	39.8 [11.7] 39.8 [11.7] 3.5	38.4 [11.3] 35.9 [10.5] 3.4	37.0 [10.8] 31.3 [9.2] 3.4
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	43.4 [12.7] 27.9 [8.2] 3.7	41.8 [12.3] 23.9 [7.0] 3.7	40.3 [11.8] 20.3 [6.0] 3.6	41.1 [12.0] 35.6 [10.4] 3.7	39.7 [11.6] 31.2 [9.2] 3.7	38.3 [11.2] 27.0 [7.9] 3.6	38.1 [11.2] 38.1 [11.2] 3.7	36.8 [10.8] 35.0 [10.3] 3.6	35.4 [10.4] 30.5 [8.9] 3.6
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	41.5 [12.2] 26.6 [7.8] 4.0	40.1 [11.8] 22.9 [6.7] 3.9	38.6 [11.3] 19.4 [5.7] 3.8	39.3 [11.5] 34.4 [10.1] 3.9	38.0 [11.1] 30.2 [8.9] 3.9	36.6 [10.7] 26.1 [7.7] 3.8	36.3 [10.6] 36.3 [10.6] 3.9	35.0 [10.3] 33.9 [9.9] 3.9	33.8 [9.9] 29.6 [8.7] 3.8
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	39.6 [11.6] 25.1 [7.4] 4.2	38.2 [11.2] 21.6 [6.3] 4.1	36.8 [10.8] 18.3 [5.4] 4.0	37.4 [11.0] 33.1 [9.7] 4.2	36.1 [10.6] 29.0 [8.5] 4.1	34.8 [10.2] 25.1 [7.4] 4.0	34.4 [10.1] 34.4 [10.1] 4.2	33.2 [9.7] 32.8 [9.6] 4.1	32.0 [9.4] 28.7 [8.4] 4.0

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A043JK

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	51.7 [15.2] 31.5 [9.2] 2.6	49.9 [14.6] 27.0 [7.9] 2.6	48.1 [14.1] 22.8 [6.7] 2.5	49.5 [14.5] 39.5 [11.6] 2.6	47.7 [14.0] 34.3 [10.1] 2.6	46.0 [13.5] 29.6 [8.7] 2.5	46.4 [13.6] 43.4 [12.7] 2.6	44.8 [13.1] 38.1 [11.2] 2.5	43.2 [12.7] 33.1 [9.7] 2.5
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.6 [14.8] 31.3 [9.2] 2.8	48.8 [14.3] 26.8 [7.9] 2.7	47.0 [13.8] 22.7 [6.7] 2.7	48.4 [14.2] 39.3 [11.5] 2.8	46.7 [13.7] 34.2 [10.0] 2.7	45.0 [13.2] 29.5 [8.7] 2.7	45.4 [13.3] 43.3 [12.7] 2.7	43.8 [12.8] 38.0 [11.1] 2.7	42.2 [12.4] 33.0 [9.7] 2.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	49.4 [14.5] 30.9 [9.1] 3.0	47.7 [14.0] 26.6 [7.8] 2.9	45.9 [13.5] 22.5 [6.6] 2.9	47.2 [13.8] 38.9 [11.4] 2.9	45.5 [13.3] 33.9 [9.9] 2.9	43.9 [12.9] 29.3 [8.6] 2.8	44.2 [13.0] 43.0 [12.6] 2.9	42.6 [12.5] 37.7 [11.1] 2.9	41.1 [12.0] 32.8 [9.6] 2.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	48.1 [14.1] 30.4 [8.9] 3.1	46.4 [13.6] 26.1 [7.7] 3.1	44.7 [13.1] 22.1 [6.5] 3.0	45.9 [13.5] 38.4 [11.3] 3.1	44.2 [13.0] 33.4 [9.8] 3.1	42.6 [12.5] 28.8 [8.5] 3.0	42.8 [12.5] 42.3 [12.4] 3.1	41.3 [12.1] 37.2 [10.9] 3.0	39.8 [11.7] 32.4 [9.5] 3.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	46.6 [13.7] 29.6 [8.7] 3.3	45.0 [13.2] 25.5 [7.5] 3.3	43.3 [12.7] 21.6 [6.3] 3.2	44.4 [13.0] 37.6 [11.0] 3.3	42.8 [12.5] 32.8 [9.6] 3.3	41.3 [12.1] 28.4 [8.3] 3.2	41.4 [12.1] 41.4 [12.1] 3.3	39.9 [11.7] 36.6 [10.7] 3.2	38.5 [11.3] 31.9 [9.4] 3.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.0 [13.2] 28.8 [8.5] 3.5	43.5 [12.7] 24.8 [7.3] 3.5	41.9 [12.3] 21.0 [6.2] 3.4	42.8 [12.5] 36.7 [10.8] 3.5	41.3 [12.1] 32.1 [9.4] 3.4	39.8 [11.7] 27.7 [8.1] 3.4	39.8 [11.7] 39.8 [11.7] 3.5	38.4 [11.3] 35.9 [10.5] 3.4	37.0 [10.8] 31.3 [9.2] 3.4
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	43.4 [12.7] 27.9 [8.2] 3.7	41.8 [12.3] 23.9 [7.0] 3.7	40.3 [11.8] 20.3 [6.0] 3.6	41.1 [12.0] 35.6 [10.4] 3.7	39.7 [11.6] 31.2 [9.2] 3.7	38.3 [11.2] 27.0 [7.9] 3.6	38.1 [11.2] 38.1 [11.2] 3.7	36.8 [10.8] 35.0 [10.3] 3.6	35.4 [10.4] 30.5 [8.9] 3.6
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	41.5 [12.2] 26.6 [7.8] 4.0	40.1 [11.8] 22.9 [6.7] 3.9	38.6 [11.3] 19.4 [5.7] 3.8	39.3 [11.5] 34.4 [10.1] 3.9	38.0 [11.1] 30.2 [8.9] 3.9	36.6 [10.7] 26.1 [7.7] 3.8	36.3 [10.6] 36.3 [10.6] 3.9	35.0 [10.3] 33.9 [9.9] 3.9	33.8 [9.9] 29.6 [8.7] 3.8
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	39.6 [11.6] 25.1 [7.4] 4.2	38.2 [11.2] 21.6 [6.3] 4.1	36.8 [10.8] 18.3 [5.4] 4.0	37.4 [11.0] 33.1 [9.7] 4.2	36.1 [10.6] 29.0 [8.5] 4.1	34.8 [10.2] 25.1 [7.4] 4.0	34.4 [10.1] 34.4 [10.1] 4.2	33.2 [9.7] 32.8 [9.6] 4.1	32.0 [9.4] 28.7 [8.4] 4.0

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions





GROSS SYSTEMS PERFORMANCE DATA—RSPM-A048

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1920 [906]	1600 [755]	1280 [604]	1920 [906]	1600 [755]	1280 [604]	1920 [906]	1600 [755]	1280 [604]
DR ①			.12	.09	.04	.12	.09	.04	.12	.09	.04
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	61.1 [17.91]	59.0 [17.29]	56.8 [16.65]	57.3 [16.79]	55.3 [16.21]	53.3 [15.62]	54.4 [15.94]	52.5 [15.39]	50.6 [14.83]
		Sens BTUH [kW]	37.7 [11.05]	34.5 [10.11]	31.2 [9.14]	44.7 [13.10]	40.9 [11.99]	37.1 [10.87]	50.4 [14.77]	46.1 [13.51]	41.8 [12.25]
		Power	2.5	2.4	2.4	2.4	2.4	2.4	2.4	2.5	2.4
	80 [26.7]	Total BTUH [kW]	59.3 [17.38]	57.2 [16.76]	55.1 [16.15]	55.5 [16.27]	53.5 [15.68]	51.6 [15.12]	52.6 [15.42]	50.7 [14.86]	48.9 [14.33]
		Sens BTUH [kW]	37.0 [10.84]	33.9 [9.94]	30.7 [9.00]	44.1 [12.92]	40.3 [11.81]	36.5 [10.70]	49.7 [14.57]	45.5 [13.33]	41.2 [12.07]
		Power	2.6	2.6	2.6	2.6	2.6	2.5	2.6	2.6	2.5
	85 [29.4]	Total BTUH [kW]	57.6 [16.88]	55.6 [16.29]	53.5 [15.68]	53.8 [15.77]	51.9 [15.21]	50.0 [14.65]	50.9 [14.92]	49.1 [14.39]	47.3 [13.86]
		Sens BTUH [kW]	36.3 [10.64]	33.2 [9.73]	30.1 [8.82]	43.4 [12.72]	39.7 [11.63]	36.0 [10.55]	49.1 [14.39]	44.8 [13.13]	40.6 [11.90]
		Power	2.8	2.8	2.7	2.8	2.7	2.7	2.8	2.7	2.7
	90 [32.2]	Total BTUH [kW]	56.0 [16.41]	54.0 [15.83]	52.1 [15.27]	52.2 [15.30]	50.4 [14.77]	48.5 [14.21]	49.3 [14.45]	47.6 [13.95]	45.9 [13.45]
Sens BTUH [kW]		35.6 [10.43]	32.6 [9.55]	29.5 [8.65]	42.7 [12.51]	39.0 [11.43]	35.4 [10.37]	48.4 [14.18]	44.2 [12.95]	40.1 [11.75]	
Power		3.0	2.9	2.9	2.9	2.9	2.8	2.9	2.9	2.8	2.8
95 [35]	Total BTUH [kW]	54.5 [15.97]	52.6 [15.42]	50.7 [14.86]	50.7 [14.86]	48.9 [14.33]	47.2 [13.83]	47.8 [14.01]	46.2 [13.54]	44.5 [13.04]	
	Sens BTUH [kW]	34.9 [10.23]	31.9 [9.35]	28.9 [8.47]	41.9 [12.28]	38.3 [11.22]	34.8 [10.20]	47.4 [13.89]	43.5 [12.75]	39.4 [11.55]	
	Power	3.1	3.1	3.0	3.1	3.0	3.0	3.1	3.1	3.0	3.0
100 [37.8]	Total BTUH [kW]	53.1 [15.56]	51.2 [15.01]	49.4 [14.48]	49.3 [14.45]	47.6 [13.95]	45.8 [13.42]	46.4 [13.60]	44.8 [13.13]	43.1 [12.63]	
	Sens BTUH [kW]	34.1 [9.99]	31.2 [9.14]	28.3 [8.29]	41.2 [12.07]	37.7 [11.05]	34.1 [9.99]	46.4 [13.60]	42.8 [12.54]	38.8 [11.37]	
	Power	3.3	3.2	3.2	3.2	3.2	3.1	3.3	3.2	3.2	3.2
105 [40.6]	Total BTUH [kW]	51.7 [15.15]	49.8 [14.59]	48.0 [14.07]	47.8 [14.01]	46.2 [13.54]	44.5 [13.04]	45.0 [13.19]	43.4 [12.72]	41.8 [12.25]	
	Sens BTUH [kW]	33.4 [9.79]	30.5 [8.94]	27.7 [8.12]	40.4 [11.84]	37.0 [10.84]	33.5 [9.82]	45.0 [13.19]	42.1 [12.34]	38.2 [11.20]	
	Power	3.5	3.4	3.3	3.4	3.4	3.3	3.4	3.4	3.3	3.3
110 [43.3]	Total BTUH [kW]	50.2 [14.71]	48.4 [14.18]	46.7 [13.69]	46.4 [13.60]	44.8 [13.13]	43.1 [12.63]	43.5 [12.75]	42.0 [12.31]	40.5 [11.87]	
	Sens BTUH [kW]	32.6 [9.55]	29.8 [8.73]	27.0 [7.91]	39.6 [11.61]	36.2 [10.61]	32.9 [9.64]	43.5 [12.75]	41.4 [12.13]	37.5 [10.99]	
	Power	3.6	3.6	3.5	3.6	3.5	3.5	3.6	3.5	3.5	3.5
115 [46.1]	Total BTUH [kW]	48.7 [14.27]	46.9 [13.75]	45.2 [13.25]	44.9 [13.16]	43.3 [12.69]	41.7 [12.22]	42.0 [12.31]	40.5 [11.87]	39.0 [11.43]	
	Sens BTUH [kW]	31.8 [9.32]	29.1 [8.53]	26.4 [7.74]	38.9 [11.40]	35.5 [10.40]	32.2 [9.44]	42.0 [12.31]	40.5 [11.87]	36.9 [10.81]	
	Power	3.8	3.7	3.6	3.7	3.7	3.6	3.8	3.7	3.6	3.6

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A060

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			2280 [1076]	1900 [897]	1520 [717]	2280 [1076]	1900 [897]	1520 [717]	2280 [1076]	1900 [897]	1520 [717]
DR ①			.10	.07	.02	.10	.07	.02	.10	.07	.02
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	76.2 [22.33]	73.5 [21.54]	70.8 [20.75]	73.5 [21.54]	70.9 [20.78]	68.4 [20.05]	69.2 [20.28]	66.8 [19.58]	64.3 [18.84]
		Sens BTUH [kW]	46.2 [13.54]	42.2 [12.37]	38.3 [11.22]	56.0 [16.41]	51.3 [15.03]	46.5 [13.63]	63.3 [18.55]	57.9 [16.97]	52.5 [15.39]
		Power	3.4	3.3	3.3	3.3	3.2	3.2	3.3	3.3	3.2
	80 [26.7]	Total BTUH [kW]	74.6 [21.86]	71.9 [21.07]	69.3 [20.31]	71.9 [21.07]	69.4 [20.34]	66.8 [19.58]	67.6 [19.81]	65.2 [19.11]	62.8 [18.40]
		Sens BTUH [kW]	45.4 [13.31]	41.5 [12.16]	37.6 [11.02]	55.2 [16.18]	50.5 [14.80]	45.8 [13.42]	62.5 [18.32]	57.2 [16.76]	51.9 [15.21]
		Power	3.6	3.5	3.5	3.5	3.4	3.4	3.5	3.4	3.4
	85 [29.4]	Total BTUH [kW]	72.8 [21.34]	70.3 [20.60]	67.7 [19.84]	70.1 [20.54]	67.7 [19.84]	65.2 [19.11]	65.8 [19.28]	63.5 [18.61]	61.2 [17.94]
		Sens BTUH [kW]	44.6 [13.07]	40.8 [11.96]	37.0 [10.84]	54.5 [15.97]	49.8 [14.59]	45.2 [13.25]	61.8 [18.11]	56.5 [16.56]	51.2 [15.01]
		Power	3.8	3.8	3.7	3.7	3.7	3.6	3.7	3.6	3.6
	90 [32.2]	Total BTUH [kW]	70.9 [20.78]	68.4 [20.05]	65.9 [19.31]	68.2 [19.99]	65.9 [19.31]	63.5 [18.61]	63.9 [18.73]	61.7 [18.08]	59.4 [17.41]
Sens BTUH [kW]		43.8 [12.84]	40.1 [11.75]	36.4 [10.67]	53.7 [15.74]	49.1 [14.39]	44.5 [13.04]	61.0 [17.88]	55.8 [16.35]	50.6 [14.83]	
Power		4.0	4.0	3.9	3.9	3.9	3.8	3.9	3.9	3.8	3.8
95 [35]	Total BTUH [kW]	68.9 [20.19]	66.5 [19.49]	64.1 [18.79]	66.2 [19.40]	63.9 [18.73]	61.6 [18.05]	61.9 [18.14]	59.7 [17.50]	57.6 [16.88]	
	Sens BTUH [kW]	43.0 [12.60]	39.4 [11.55]	35.7 [10.46]	52.9 [15.50]	48.4 [14.18]	43.9 [12.87]	60.4 [17.70]	55.1 [16.15]	49.9 [14.62]	
	Power	4.3	4.2	4.1	4.2	4.1	4.0	4.1	4.1	4.0	4.0
100 [37.8]	Total BTUH [kW]	66.7 [19.55]	64.4 [18.87]	62.1 [18.20]	64.1 [18.79]	61.8 [18.11]	59.6 [17.47]	59.8 [17.53]	57.7 [16.91]	55.6 [16.29]	
	Sens BTUH [kW]	42.1 [12.34]	38.6 [11.31]	35.0 [10.26]	52.0 [15.24]	47.6 [13.95]	43.1 [12.63]	59.2 [17.35]	54.3 [15.91]	49.2 [14.42]	
	Power	4.5	4.4	4.3	4.4	4.3	4.2	4.4	4.3	4.2	4.2
105 [40.6]	Total BTUH [kW]	64.5 [18.90]	62.2 [18.23]	59.9 [17.55]	61.8 [18.11]	59.6 [17.47]	57.4 [16.82]	57.5 [16.85]	55.5 [16.27]	53.4 [15.65]	
	Sens BTUH [kW]	41.1 [12.05]	37.6 [11.02]	34.1 [9.99]	51.0 [14.95]	46.6 [13.66]	42.3 [12.40]	57.5 [16.85]	53.3 [15.62]	48.3 [14.16]	
	Power	4.7	4.6	4.5	4.6	4.5	4.4	4.6	4.5	4.4	4.4
110 [43.3]	Total BTUH [kW]	62.0 [18.17]	59.9 [17.55]	57.7 [16.91]	59.4 [17.41]	57.3 [16.79]	55.2 [16.18]	55.0 [16.12]	53.1 [15.56]	51.2 [15.01]	
	Sens BTUH [kW]	39.9 [11.69]	36.5 [10.70]	33.1 [9.70]	49.8 [14.59]	45.5 [13.33]	41.3 [12.10]	55.0 [16.12]	52.2 [15.30]	47.3 [13.86]	
	Power	4.9	4.8	4.8	4.8	4.7	4.7	4.8	4.7	4.6	4.6
115 [46.1]	Total BTUH [kW]	59.5 [17.44]	57.4 [16.82]	55.3 [16.21]	56.8 [16.65]	54.8 [16.06]	52.8 [15.47]	52.5 [15.39]	50.7 [14.86]	48.8 [14.30]	
	Sens BTUH [kW]	38.4 [11.25]	35.2 [10.32]	31.9 [9.35]	48.3 [14.16]	44.2 [12.95]	40.1 [11.75]	52.5 [15.39]	50.7 [14.86]	46.1 [13.51]	
	Power	5.1	5.1	5.0	5.0	5.0	4.9	5.0	4.9	4.9	4.9

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions





Air

Indoor Airflow Performance
RSPM Series

INDOOR AIRFLOW PERFORMANCE — 230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—230 Volts Side Discharge—Wet Coil										
					External Static Pressure—Inches W.C. [kPa]										
					0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	
2.0 [7.03]	Low (Tap 2)	700/900	10x9 1/4 HP [186] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	939 [443]	877 [414]	816 [385]	754 [356]	693 [327]	631 [298]	570 [269]	508 [240]	447 [211]	—
					RPM	585	601	655	744	809	860	915	1001	1043	—
	Watts		131	116	97	110	121	126	136	149	152	—			
	High (Tap 1)		CFM	1240 [585]	1184 [559]	1127 [532]	1071 [505]	1014 [479]	958 [452]	901 [425]	845 [399]	788 [372]	732 [345]	—	
2.5 [8.79]	Low (Tap 2)	875/1125	10x9 1/3 HP [249] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	607	634	698	761	815	880	946	989	1038	1091
					RPM	161	145	159	173	182	196	210	220	231	237
	Watts		1169 [552]	1109 [523]	1049 [495]	988 [466]	928 [438]	868 [410]	807 [381]	747 [353]	687 [324]	626 [295]	—		
	High (Tap 1)		CFM	603	619	693	756	809	893	942	989	1034	1076	—	
3.0 [10.55]	Low (Tap 2)	1050/1350	10x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	144	130	138	151	159	174	185	195	199	209
					RPM	1365 [644]	1316 [621]	1266 [597]	1217 [574]	1168 [551]	1119 [528]	1069 [505]	1020 [481]	971 [458]	922 [435]
	Watts		631	677	732	784	843	894	942	1035	1077	1118	—		
	High (Tap 1)		CFM	177	190	204	218	234	247	256	279	289	294	—	
3.5 [12.31]	Low (Tap 2)	1225/1575	11x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1328 [627]	1280 [604]	1231 [581]	1183 [558]	1135 [536]	1086 [513]	1038 [490]	990 [467]	941 [444]	893 [421]
					RPM	648	697	752	807	857	903	989	1036	1077	1114
	Watts		178	191	206	220	233	246	265	277	286	291	—		
	High (Tap 1)		CFM	248	261	277	292	307	322	334	348	366	358	—	
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1510 [713]	1464 [691]	1418 [669]	1373 [648]	1327 [626]	1281 [605]	1235 [583]	1190 [562]	1144 [540]	1098 [518]
					RPM	707	743	792	841	890	942	1031	1077	1114	1151
	Watts		248	261	277	292	307	322	334	348	366	358	—		
	High (Tap 1)		CFM	1542 [728]	1490 [703]	1438 [679]	1386 [654]	1335 [630]	1283 [606]	1231 [581]	1180 [557]	1128 [532]	1076 [508]	—	
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	598	617	662	714	758	800	849	876	913	951
					RPM	244	231	237	254	270	285	304	313	326	340
	Watts		1740 [821]	1695 [800]	1649 [778]	1604 [757]	1558 [735]	1513 [714]	1467 [692]	1422 [671]	1376 [649]	1331 [628]	—		
	High (Tap 1)		CFM	632	665	709	749	797	833	879	917	951	981	—	
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	295	311	331	350	371	386	409	426	440	454
					RPM	1701 [803]	1655 [781]	1609 [759]	1563 [738]	1517 [716]	1471 [694]	1425 [673]	1379 [651]	1333 [629]	1287 [607]
	Watts		624	648	696	743	787	826	863	895	934	970	—		
	High (Tap 1)		CFM	280	287	309	328	347	363	380	392	410	426	—	
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1921 [907]	1878 [886]	1835 [866]	1792 [846]	1749 [825]	1706 [805]	1663 [785]	1620 [765]	1577 [744]	1534 [724]
					RPM	678	706	738	776	816	865	899	932	967	994
	Watts		385	400	416	439	458	484	501	517	537	550	—		
	High (Tap 1)		CFM	1986 [937]	1945 [918]	1905 [899]	1864 [880]	1823 [860]	1782 [841]	1741 [822]	1700 [802]	1659 [783]	1618 [764]	—	
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	731	759	792	832	871	909	943	979	1014	1055
					RPM	446	458	477	499	521	543	562	582	600	621
	Watts		2229 [1052]	2190 [1034]	2152 [1016]	2114 [998]	2075 [979]	2037 [961]	1999 [943]	1960 [925]	1922 [907]	1884 [889]	—		
	High (Tap 1)		CFM	795	824	851	882	919	952	983	1013	1045	1077	—	
Watts	619	638	658	680	703	724	745	764	784	804	—				

[] Designates Metric Conversions



INTEGRATED AIR & WATER



INDOOR AIRFLOW PERFORMANCE — 208 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—208 Volts Side Discharge—Wet Coil										
					External Static Pressure—Inches W.C. [kPa]										
					0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [1.10]	0.5 [1.12]	0.6 [1.15]	0.7 [1.17]	0.8 [1.20]	0.9 [1.22]	1.0 [1.25]	
2.0 [7.03]	Low (Tap 2)	700/900	10x9 1/4 HP [186] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	959 [453]	892 [421]	825 [389]	758 [358]	691 [326]	624 [294]	557 [263]	491 [232]	—	—
					RPM	582	606	655	723	808	851	906	996	—	—
					Watts	132	110	96	106	119	123	132	144	—	—
2.5 [8.79]	Low (Tap 2)	875/1125	10x9 1/3 HP [249] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1229 [580]	1170 [552]	1112 [525]	1054 [497]	996 [470]	938 [443]	879 [415]	821 [387]	763 [360]	705 [333]
					RPM	607	634	698	761	815	880	946	989	1038	1091
					Watts	161	145	159	173	182	196	210	220	231	237
3.0 [10.55]	Low (Tap 2)	1050/1350	10x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1162 [548]	1099 [519]	1035 [488]	972 [459]	908 [429]	844 [398]	781 [369]	717 [338]	654 [309]	590 [278]
					RPM	603	626	690	752	815	906	941	984	1027	1096
					Watts	143	124	136	148	157	175	180	188	192	202
3.5 [12.31]	Low (Tap 2)	1225/1575	11x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1306 [616]	1253 [591]	1200 [566]	1147 [541]	1095 [517]	1042 [492]	989 [467]	937 [442]	884 [417]	831 [392]
					RPM	632	679	733	787	841	883	941	1035	1067	1099
					Watts	174	187	201	215	227	235	248	266	273	277
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1328 [627]	1276 [602]	1223 [577]	1171 [553]	1118 [528]	1066 [503]	1013 [478]	961 [454]	—	—
					RPM	642	693	747	803	852	903	988	1031	—	—
					Watts	173	187	200	214	226	238	254	263	—	—
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1508 [712]	1459 [689]	1409 [665]	1359 [641]	1310 [618]	1260 [595]	1210 [571]	1160 [547]	1111 [524]	1061 [501]
					RPM	698	738	789	839	888	933	983	1035	1103	1137
					Watts	243	255	271	285	299	310	322	332	343	343
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1531 [723]	1477 [697]	1423 [672]	1370 [647]	1316 [621]	1262 [596]	1208 [570]	1154 [545]	1101 [520]	1047 [494]
					RPM	602	619	668	715	757	801	844	878	918	954
					Watts	238	227	236	251	266	281	296	307	320	333
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1724 [814]	1678 [792]	1632 [770]	1586 [749]	1540 [727]	1495 [706]	1449 [684]	1403 [662]	1357 [640]	1311 [619]
					RPM	639	671	715	759	794	834	875	911	948	977
					Watts	295	309	330	348	363	380	397	414	429	440
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1708 [806]	1658 [782]	1609 [759]	1559 [736]	1510 [713]	1460 [689]	1410 [665]	1361 [642]	1311 [619]	1262 [596]
					RPM	619	651	686	741	783	822	859	894	937	971
					Watts	280	284	298	323	339	355	370	385	402	415
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1917 [905]	1872 [883]	1827 [862]	1782 [841]	1736 [819]	1691 [798]	1646 [777]	1601 [756]	1556 [734]	1510 [713]
					RPM	673	702	736	769	818	860	898	928	960	989
					Watts	377	392	409	426	451	473	490	504	518	531
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1954 [922]	1914 [903]	1874 [884]	1833 [865]	1793 [846]	1753 [827]	1713 [808]	1673 [790]	1632 [770]	1592 [751]
					RPM	719	747	779	818	857	894	928	963	998	1038
					Watts	439	451	469	491	512	534	553	573	590	611
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	2173 [1026]	2136 [1008]	2098 [990]	2061 [973]	2024 [955]	1986 [937]	1949 [920]	1911 [902]	1874 [884]	1837 [867]
					RPM	775	803	830	860	896	928	959	988	1019	1050
					Watts	604	622	642	663	686	706	727	745	765	784

[] Designates Metric Conversions



ELECTRICAL DATA – RSPM SERIES													
		-A024JK	-A030JK	-A036CK	-A036JK	-A042CK	-A042JK	A043CK	A043JK	-A048CK	-A048JK	-A060CK	-A060JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	23/23	24/24	22/22	27/27	25/25	30/30	25/25	30/30	27/27	35/35	30/30	43/43
	Minimum Overcurrent Protection Device Size	30/30	30/30	25/25	35/35	30/30	35/35	30/30	35/35	30/30	40/40	35/35	50/50
	Maximum Overcurrent Protection Device Size	35/35	35/35	30/30	40/40	35/35	45/45	35/35	45/45	40/40	50/50	45/45	60/60
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3	1	3	1	3	1	3	1
	HP	2	2.5	3	3	3.5	3.5	3450	3450	4	4	4.5	4.5
	RPM	3450	3450	3450	3450	3450	3450	3 1/2	3.5	3450	3450	3450	3450
	Amps (RLA)	13.5/13.5	14.1/14.1	12.8/12.8	17/17	13.5/13.5	17.9/17.9	13.5/13.5	17.9/17.9	14.7/14.7	21.2/21.2	16/16	26.4/26.4
	Amps (LRA)	58.3/58.3	73/73	95/95	96.7/96.7	88/88	112/112	88/88	112/112	115/115	115/115	110/110	134/134
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	1.5/1.5	1.5/1.5	1.9	1.9	1.9	1.9
	Amps (LRA)	3	3	3	3	3	3	3/3	3/3	4	4	4	4
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1	1	1
	HP	1/4	1/3	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4	3/4
	Amps (FLA)	4.1	4.1	4.1	4.1	6	6	6/6	6/6	6	6	7.6	7.6



208-240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

Single Power Supply For Both Unit and Heater Kit										Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RSPM-	Heater Kit									Heater Kit					Heat Pump	
	RXQJ-C Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208-240 V	Heater KBTU/Hr @ 208-240 V	Heater Amp. @ 208-240 V	Unit Min. Ckt. Ampacity @ 208-240 V	Over Current Protective Device Size		Min. Circuit Ampacity 208-240 V	Max. Fuse Size	Min. Ckt. Ampacity	Protective Device Size		Min./Max. @ 240 V	
								Min./Max. @ 208 V	Min./Max. @ 240 V				Min./Max. @ 208 V	Min./Max. @ 240 V		
A024J	No Heat	—	—	—	—	—	23/23	30/35	30/35	23/23	—	—	30/35	30/35	30/35	
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/31	30/35	35/35	—	22/25	25/25	—	—	—	
	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	—	33/38	35/40	—	—	—	
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	—	44/50	45/50	—	—	—	
A030J	No Heat	—	—	—	—	—	24/24	30/35	30/35	24/24	—	—	30/35	30/35	30/35	
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/31	30/35	35/35	—	22/25	25/25	—	—	—	
	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	—	33/38	35/40	—	—	—	
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	—	44/50	45/50	—	—	—	
A036J	No Heat	—	—	—	—	—	71/81	80/80	80/80	71/81	—	—	—	—	—	
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/27	35/40	35/40	—	22/25	25/25	—	—	—	
	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	—	33/38	35/40	—	—	—	
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	—	44/50	45/50	—	—	—	
A042J A043J	No Heat	—	—	—	—	—	71/81	80/80	80/80	71/81	—	—	—	—	—	
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	30/30	35/45	35/45	—	22/25	25/25	—	—	—	
	07J	1	1	5.4/7.2	18.42/24.56	26/30	40/45	40/40	45/45	—	33/38	35/40	—	—	—	
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	51/58	60/60	60/60	—	44/50	45/50	—	—	—	
A048J	No Heat	—	—	—	—	—	95/108	100/100	100/100	95/108	—	—	—	—	—	
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	35/35	40/50	40/50	—	22/25	25/25	—	—	—	
	07J	1	1	5.4/7.2	18.42/24.56	26/30	40/45	40/40	45/45	—	33/38	35/40	—	—	—	
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	51/58	60/60	60/60	—	44/50	45/50	—	—	—	
A060J	No Heat	—	—	—	—	—	95/108	100/100	100/100	95/108	—	—	—	—	—	
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	43/43	50/60	50/60	—	22/25	25/25	—	—	—	
	07J	1	1	5.4/7.2	18.42/24.56	26/30	43/47	50/60	50/60	—	33/38	35/40	—	—	—	
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	53/60	60/60	60/60	—	44/50	45/50	—	—	—	
	No Heat	—	—	—	—	—	75/85	80/80	80/80	75/85	—	—	—	—	—	
	15J	3	2	10.8/14.4	36.85/49.13	52/60	75/85	80/80	80/80	—	65/75	70/80	—	—	—	
	20J	4	2	14.4/19.2	49.12/65.52	69.33/80	97/110	100/100	110/110	—	87/100	90/100	—	—	—	
	20J	4	2	14.4/19.2	49.12/65.52	69.33/80	97/110	100/100	110/110	—	87/100	90/100	—	—	—	




208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

Single Power Supply For Both Unit and Heater Kit												Separate Power Supply For Both Unit and Heater Kit					
Unit Model No. RSPM-	Heater Kit											Heater Kit			Heat Pump		
	RXQJ-C Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208-240 V	Heater KBTU/Hr @ 208-240 V	Heater Amp. @ 208-240 V	Unit Min. Ckt. Ampacity @ 208-240 V	Over Current Protective Device Size		Min. Ckt. Ampacity 208-240 V	Max. Fuse Size	Min. Circuit Ampacity 208-240 V	Over Current Protective Device Size				
								Min./Max. @ 208 V	Min./Max. @ 240 V				Min./Max. @ 208 V	Min./Max. @ 240 V			
A036C	No Heat	—	—	—	—	—	22/22	25/30	25/30	—	—	22/22	25/30	25/30			
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	31/34	35/35	35/35	25/29	25/30	—	—	—			
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	43/49	45/45	50/50	38/44	40/45	—	—	—			
A042C A043C	No Heat	—	—	—	—	—	25/25	30/35	30/35	—	—	25/25	30/35	30/35			
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	33/37	35/35	40/40	25/29	25/30	—	—	—			
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	46/51	50/50	60/60	38/44	40/45	—	—	—			
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	58/66	60/60	70/70	50/58	50/60	—	—	—			
A048C	No Heat	—	—	—	—	—	27/27	30/40	30/40	—	—	27/27	30/40	30/40			
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	33/37	35/35	40/40	25/29	25/30	—	—	—			
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	46/51	50/50	60/60	38/44	40/45	—	—	—			
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	58/66	60/60	70/70	50/58	50/60	—	—	—			
A060C	No Heat	—	—	—	—	—	30/30	35/45	35/45	—	—	30/30	35/45	35/45			
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	35/39	35/35	40/40	25/29	25/30	—	—	—			
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	48/53	50/50	60/60	38/44	40/45	—	—	—			
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	60/68	60/60	70/70	50/58	50/60	—	—	—			


DIMENSIONS

Model	Height "A"
024, 030, 036, 042, 043	29 1/8"
048, 060	37 1/8"

FRONT VIEW

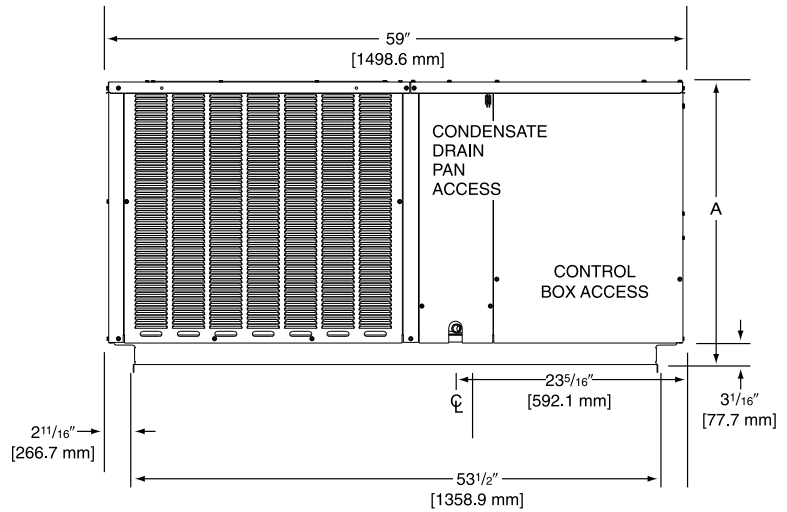


REAR VIEW


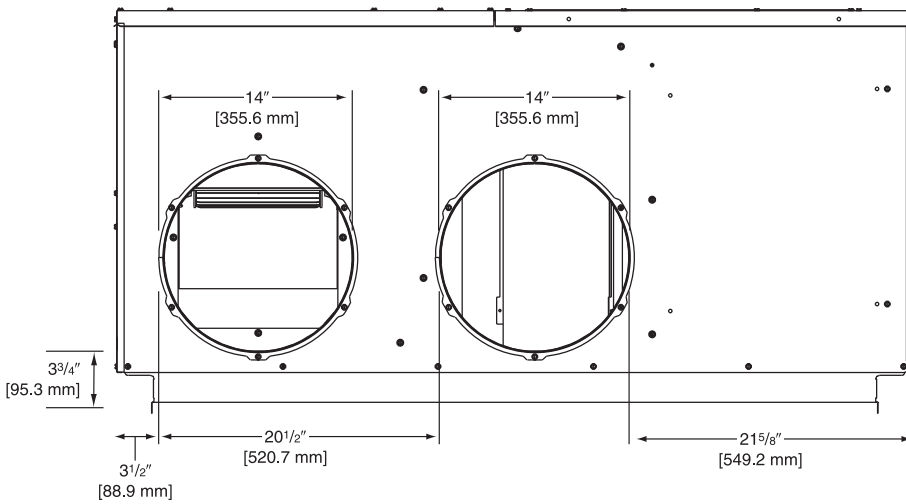


BOTTOM VIEW

ELECTRICAL CONNECTIONS

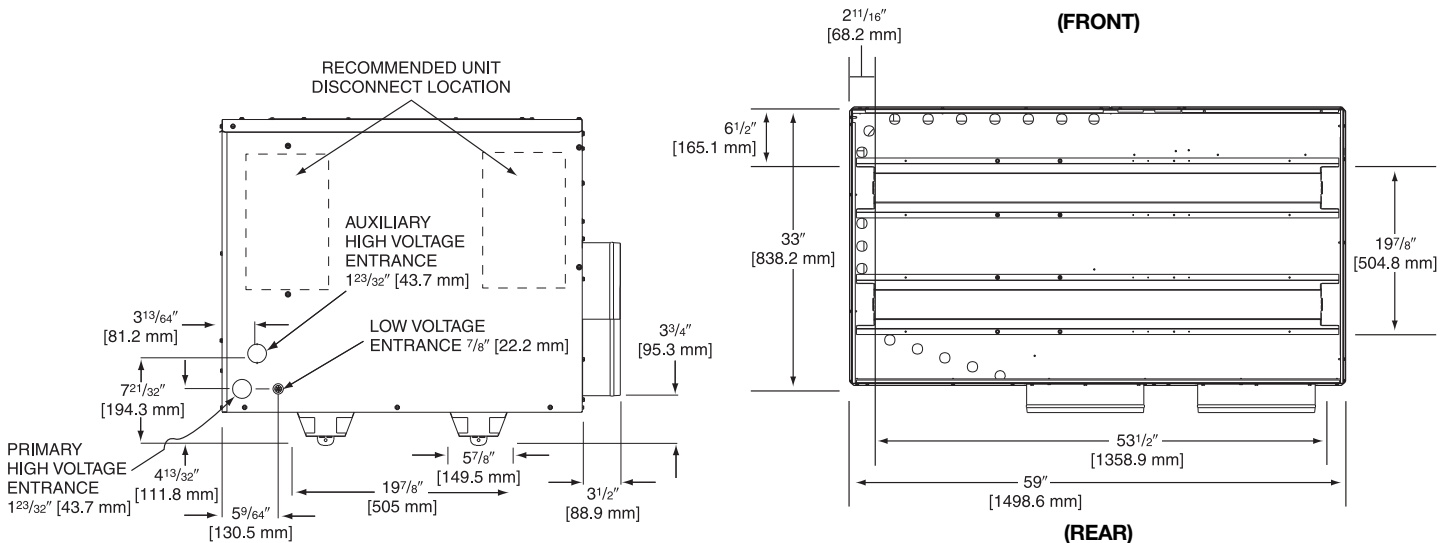

[] Designates Metric Conversions

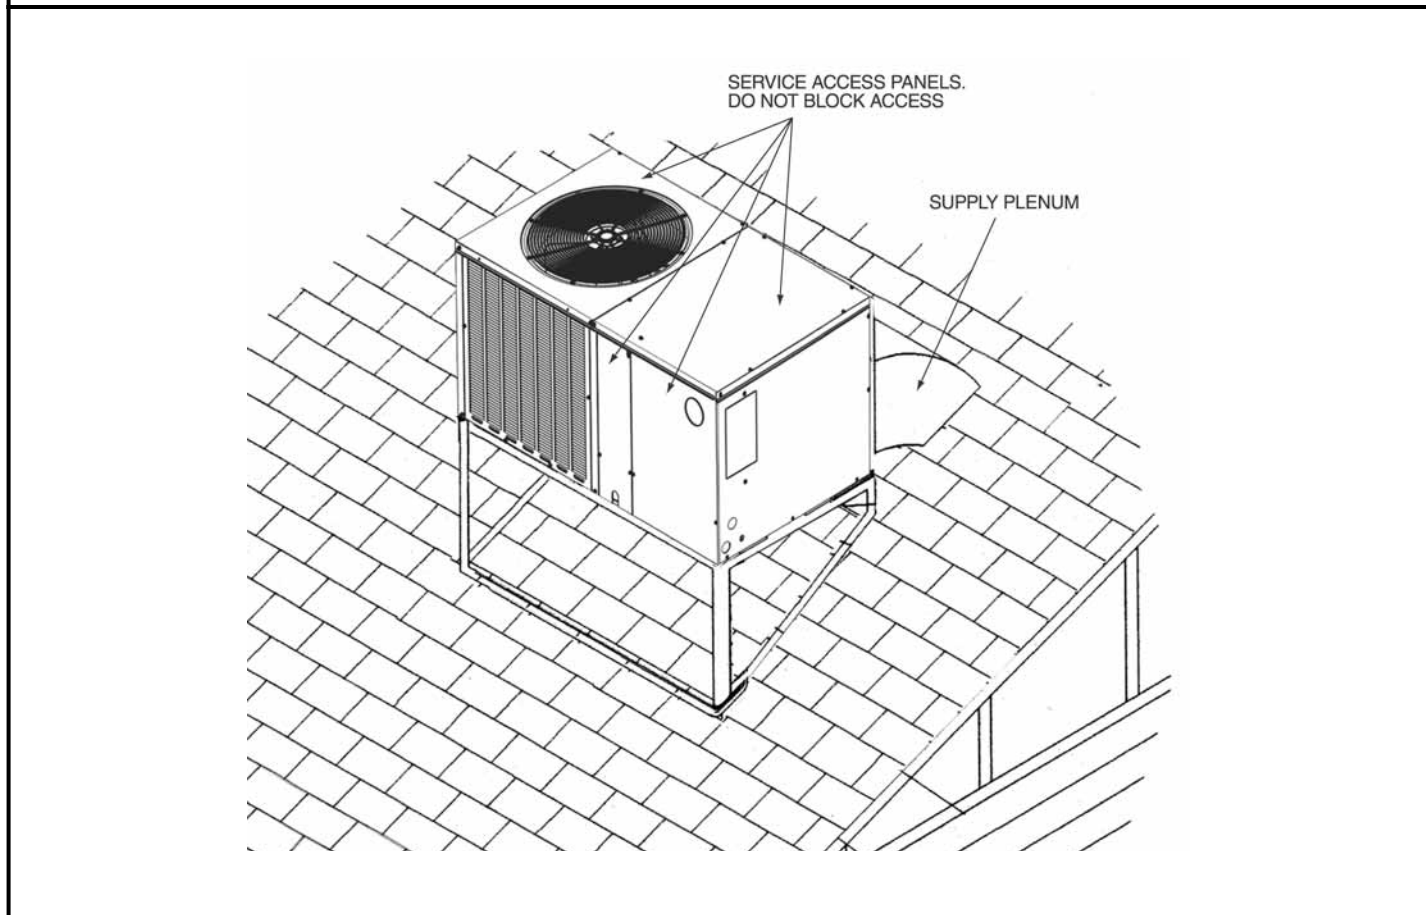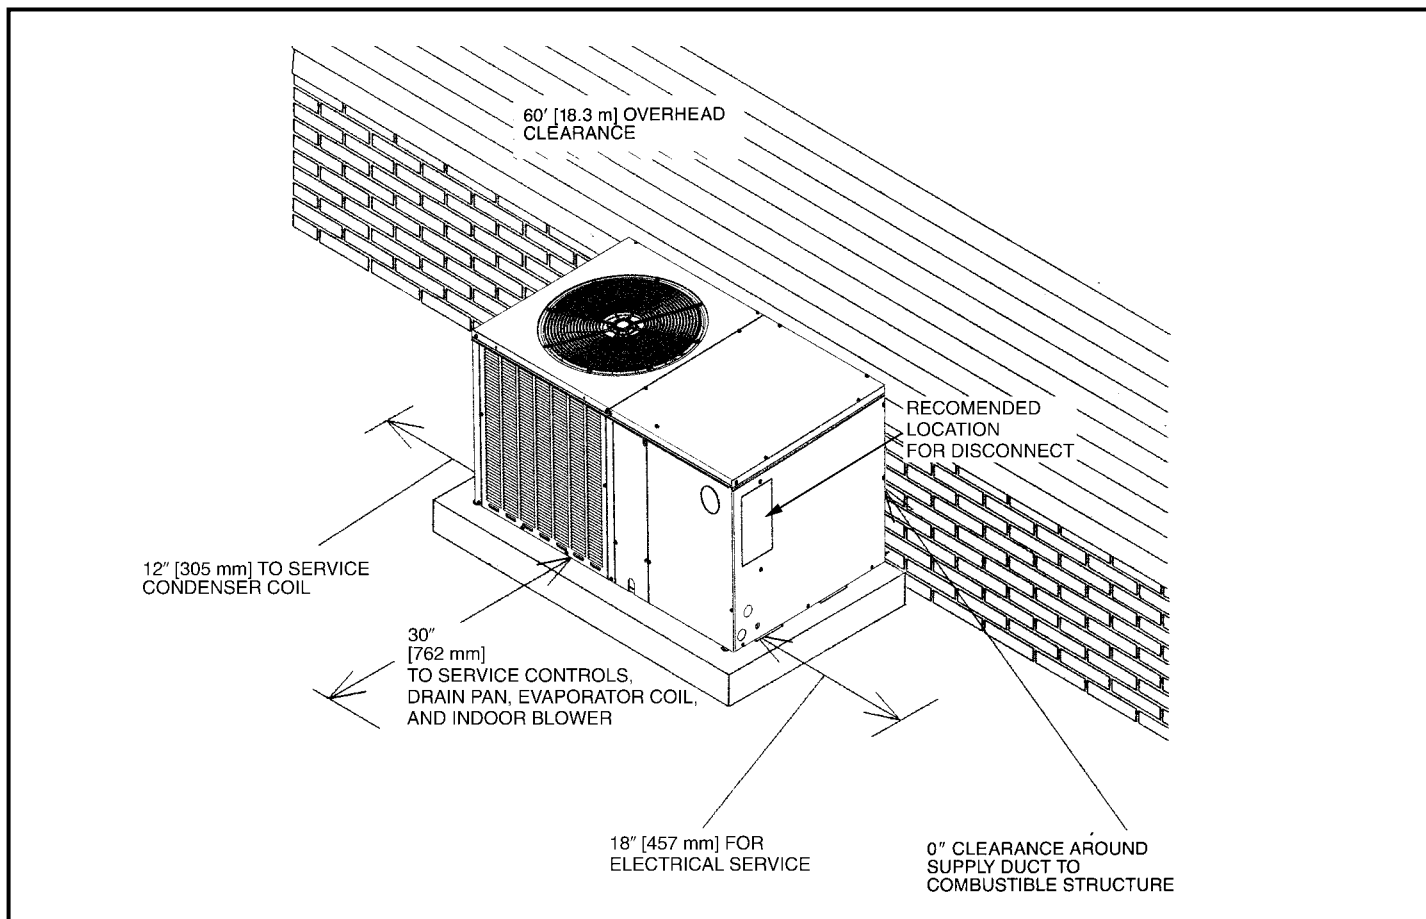

[] Designates Metric Conversions

ACCESSORY EQUIPMENT

Accessory Description	Model Application	Accessory Model No.
Outdoor Thermostat	RSPM	RXPT-A01
Thermostat	RSPM	See Thermostat Specification Sheet (T11-001)

THERMOSTATS



200-Series *
Programmable



300-Series *
Deluxe
Programmable

400-Series *
Special Applications/
Programmable




500-Series *
Communicating/
Programmable

Brand	Descriptor (3 Characters)	Series (3 Characters)	System (2 Characters)	Type (2 Characters)
RHC	- TST	213	UN	MS
RHC=Rheem	TST=Thermostat	200=Programmable 300=Deluxe Programmable 400=Special Applications/ Programmable 500=Communicating/ Programmable	GE=Gas/Electric UN=Universal (AC/HP/GE) MD=Modulating Furnace DF=Dual Fuel CM=Communicating	SS=Single-Stage MS=Multi-Stage

* Photos are representative. Actual models may vary.

For detailed thermostat match-up information,
see specification sheet form number T11-001.

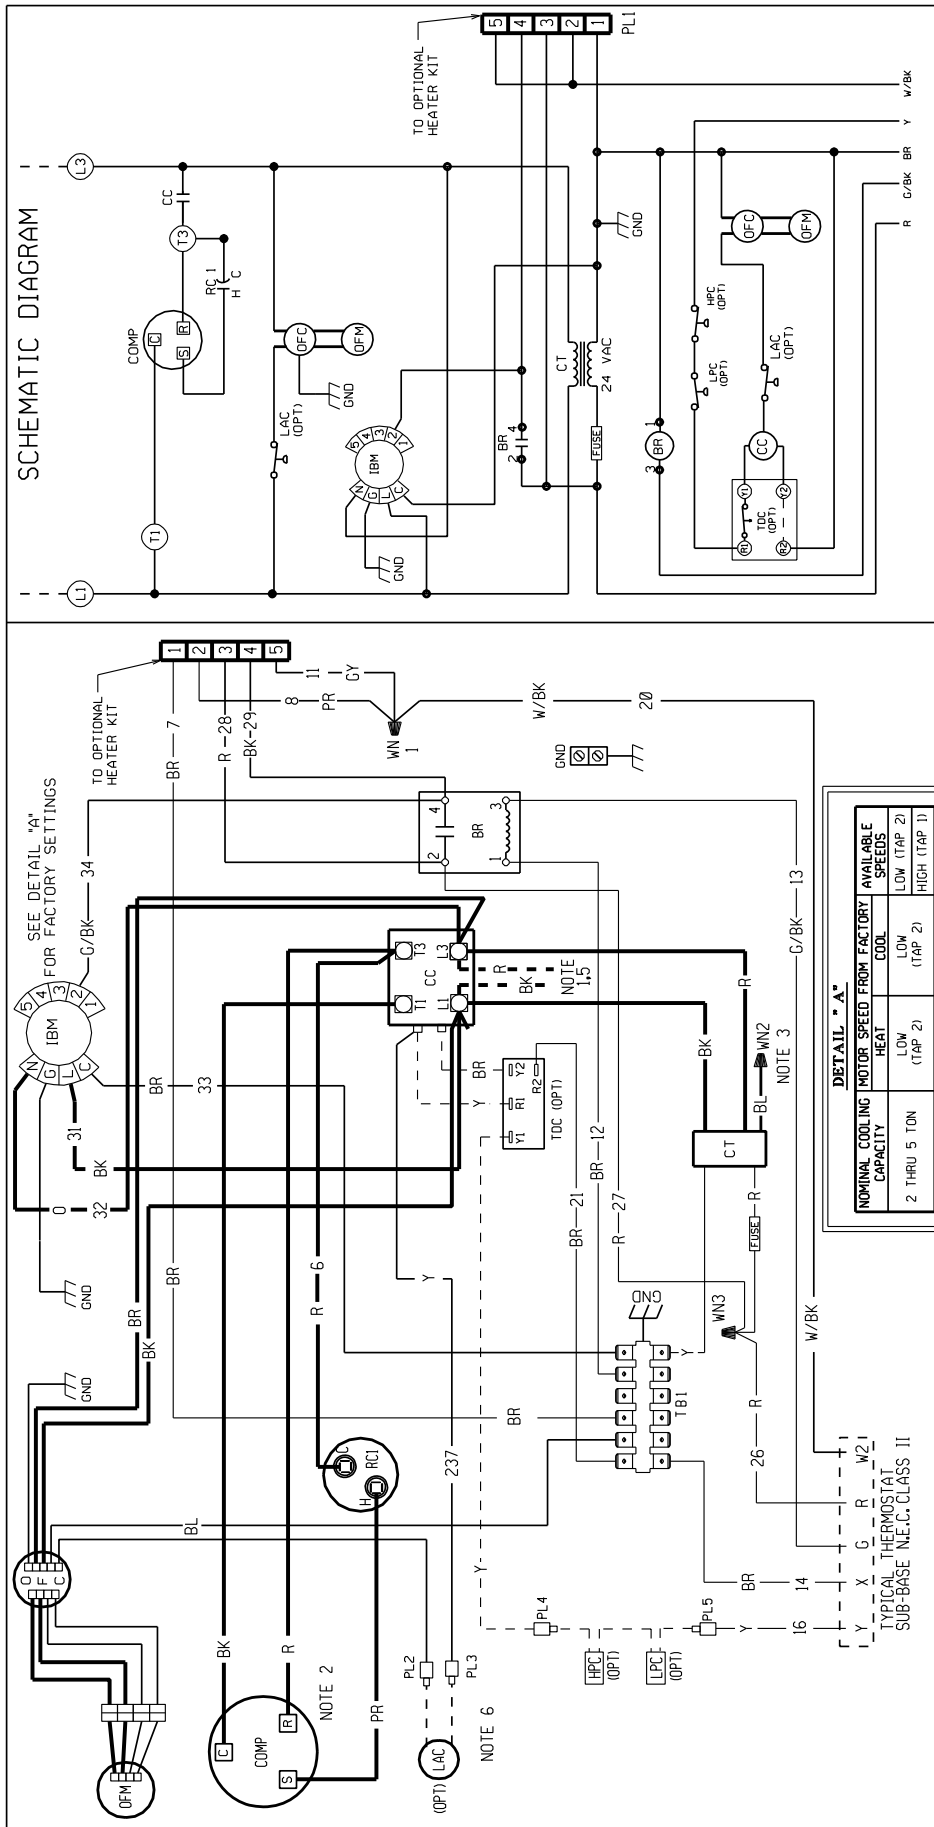

SCHEMATIC DIAGRAM

COMPONENT CODE

ALC AUX. LIMIT CONTROL
 BR BLOWER RELAY CONTACTOR
 CCH CRANKCASE HEATER
 COMP COMPRESSOR MOTOR
 CT CONTROL TRANSFORMER
 GND GROUND
 HPC HIGH PRESSURE CONTROL
 IBM INDOOR BLOWER MOTOR

LAC LOW AMBIENT COOLING CONTROL
 LFC LOW FAN CONTROL
 OFM OUTDOOR FAN MOTOR
 OPT OPTIONAL
 PL1 PLUG
 RC RUN CAPACITOR
 TB TERMINAL BLOCK
 TDC TIME DELAY CONTROL
 WIRE NUT

WIRING INFORMATION

LINE VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED

LOW VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED

REPLACEMENT WIRE
 -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C° MIN.)
 -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

WIRE COLOR CODE

BK BLACK
 BR BROWN
 BL BLUE
 G GREEN
 GR GRAY
 O ORANGE
 PK PINK
 PR PURPLE
 R RED
 W WHITE
 Y YELLOW
 CL CLEAR

ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER
 WITH INDOOR X-MOTOR AND OUTDOOR REMOTE CONTROL ECM

1 PH, 208-230 VOLT - 60 HZ

DR. BY JHB APP. BY DATE 9-03-09 DWG. NO. **90-23637-17** REV **01**

BEFORE PURCHASING THIS APPLIANCE, READ IMPORTANT ENERGY COST AND EFFICIENCY INFORMATION AVAILABLE FROM YOUR RETAILER.

GENERAL TERMS OF LIMITED WARRANTY*

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Conditional Parts (Registration Required)

(1 Phase, Residential Applications).....Ten (10) Years

Compressor

(1 Phase, Residential Applications).....Ten (10) Years

(1 & 3 Phase, Commercial Applications).....Five (5) Years

Parts

(3 Phase, Commercial Applications).....One (1) Year



The new degree of comfort.™

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Heating, Cooling & Water Heating • P.O. Box 17010
Fort Smith, Arkansas 72917 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5



INTEGRATED AIR & WATER