



SUBMITTAL COVER SHEET

PROJECT NAME _____						
LOCATION _____						
ARCHITECT _____						
ENGINEER _____						
CONTRACTOR _____						
SUBMITTED BY _____ DATE _____						
UNIT SUMMARY						
Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						
ACCESSORIES:				NOTES:		

SUBMITTAL SHEET FOR MLA13

1 $\frac{1}{2}$ TO 5 NOMINAL TON [5.28 TO 17.6 kW], EFFICIENCIES UP TO 15.1 SEER/12.5 EER AIR CONDITIONER

JOB NAME _____ LOCATION _____

CONTRACTOR _____ ORDER NO. _____

ENGINEER _____ UNIT MODEL NO. _____

SUBMITTED FOR ☐ APPROVAL ☐ RECORD COIL MODEL NO. _____

DATE _____ AIR HANDLER MODEL NO. _____

UNIT DATA

COOLING PERFORMANCE

EFFICIENCY SEER

TOTAL CAPACITY* MBH [kW]

SENSIBLE CAPACITY* MBH [kW]

OUTDOOR DESIGN TEMP °F [°C] DB

TEMP. OF AIR ENTERING
EVAPORATOR COIL °F [°C] DB
..... °F [°C] WB

POWER INPUT REQUIREMENT kW
(*uses blower motor heat)

HEATING PERFORMANCE

EFFICIENCY HSPF

TOTAL CAPACITY* MBH [kW]

OUTDOOR DESIGN TEMP °F [°C] DB

TEMP. OF AIR ENTERING
EVAPORATOR COIL °F [°C] DB

SUPPLY AIR BLOWER PERFORMANCE

TOTAL AIR SUPPLY CFM [L/s]

TOTAL RESISTANCE EXTERNAL
TO UNIT IWG

BLOWER SPEED RPM

POWER OUTPUT REQUIREMENT BHP

MOTOR RATING HP [W]

POWER INPUT REQUIREMENT kW

ELECTRICAL DATA

POWER SUPPLY Hz

TOTAL UNIT AMPACITY AMPS

MINIMUM WIRE SIZE AWG

MAXIMUM OVERCURRENT DEVICE
FUSES/HACR BREAKER AMPS

CLEARANCES

ACCESS SIDE 24" [609.6 mm]

AIR INLETS 12" [304.8 mm]

ABOVE UNIT 60" [1524 mm]

FEATURES FOR MLA13 AIR CONDITIONER UNITS

- New composite base pan – dampens sound, captures wire grille, eliminates corrosion and reduces number of fasteners needed
- Powder coat paint finish – for a long lasting professional finish
- Scroll compressor – uses 70% fewer moving parts for higher efficiency and increased reliability
- Modern cabinet aesthetics – increased curb appeal with visually appealing design
- Wire Grille – provides ultimate coil protection, enhance cabinet strength, and increased cabinet rigidity
- Optimized fan orifice – optimizes airflow and reduces unit sound
- Rust resistant screws – confirmed through 1500-hour salt spray testing
- 3"-4"-5" service valve space – provides a minimum working area of 27-square inches for easier access
- 15" wide, industry leading corner service access – makes repairs easier and faster.
- External gauge port access – allows easy connection of "low-loss" gauge ports
- Single-row condenser coil – makes unit lighter and allows thorough coil cleaning to maintain "out of the box" performance
- Fewer cabinet fasteners – allow for faster access to internal components and hassle-free panel removal
- Service trays – hold fasteners or caps during service calls
- QR code – provides technical information on demand for faster service calls
- Fan motor harness with extra long wires allows unit top to be removed without disconnecting fan wire.

ACCESSORIES/OPTIONS

Compressor Crankcase Heater ☐


Low Ambient Control (Model No. RXAD-A08) ☐

Compressor Sound Cover ☐

Compressor Hard Start Kit ☐




(IN CERTAIN MATCHED SYSTEMS)



"Proper sizing and installation of equipment is critical to achieve optimal performance. Split system air conditioners and heat pumps must be matched with appropriate coil components to meet ENERGY STAR criteria. Ask your Contractor for details or visit www.energystar.gov."

MLA13 18, 24, 30,
36, 42, 48, 60

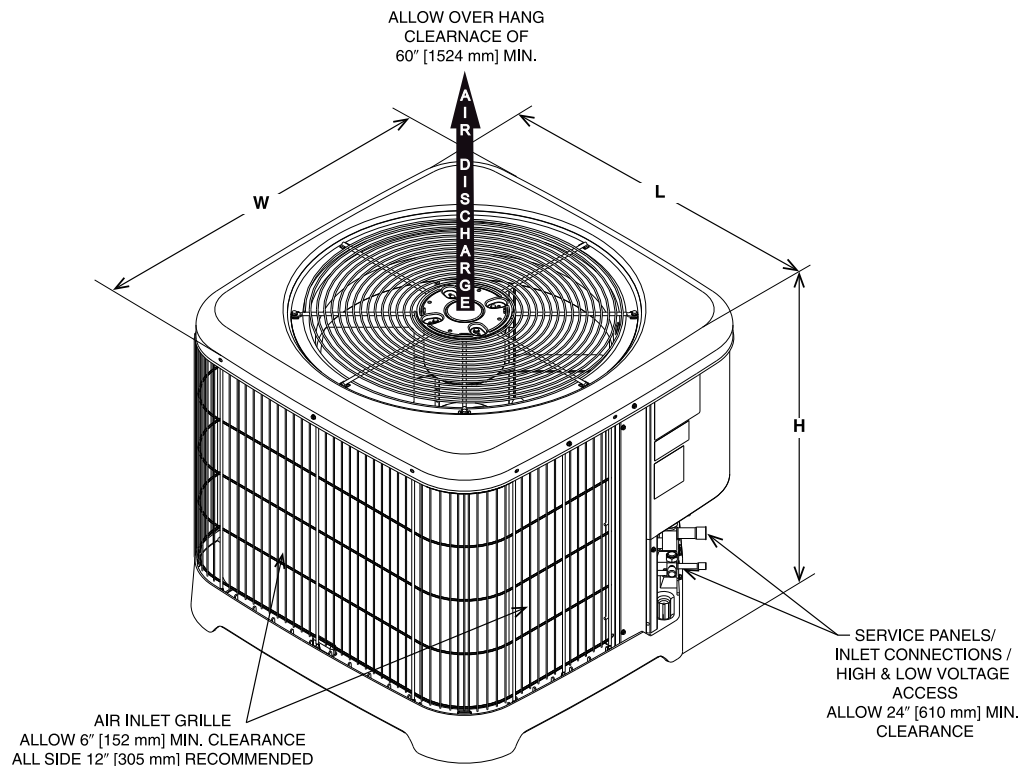

ST-A1226-24-00

Unit Dimensions

MODEL NO.	OPEMLATING						SHIPPING					
	H (Height)		L (Length)		W (Width)		H (Height)		L (Length)		W (Width)	
	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm	INCHES	mm
MLA1318	27	685	29.75	755	29.75	755	28.75	730	32.38	822	32.38	822
MLA1324	25	635	29.75	755	29.75	755	26.75	679	32.38	822	32.38	822
MLA1330	25	685	29.75	755	29.75	755	26.75	679	32.38	822	32.38	822
MLA1336	27	685	29.75	755	29.75	755	28.75	730	32.38	822	32.38	822
MLA1342	31	787	29.75	755	29.75	755	32.75	831	32.38	822	32.38	822
MLA1348	27	685	33.75	857	33.75	857	28.75	730	36.38	924	36.38	924
MLA1360	31	787	35.75	908	35.75	908	32.75	831	38.38	974	36.38	974

[] Designates Metric Conversions

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.