




Power Vent Gas

70,000-75,000 Btu/h

Standard Features

- Uses 3" or 4" schedule 40 PVC, CPVC or ABS pipe
- Vents up to 95 feet
- Easy to install/maintain blower assembly
- Spark-to-pilot ignition system
- Low NOx burner
- Self-diagnostic thermostat/gas valve
- 2" rigid foam insulation
- Factory installed CSA/ASME rated T&P relief valve
- Certified for a 150 PSI maximum working pressure
- Durable brass drain valve
- 3-Year limited tank warranty

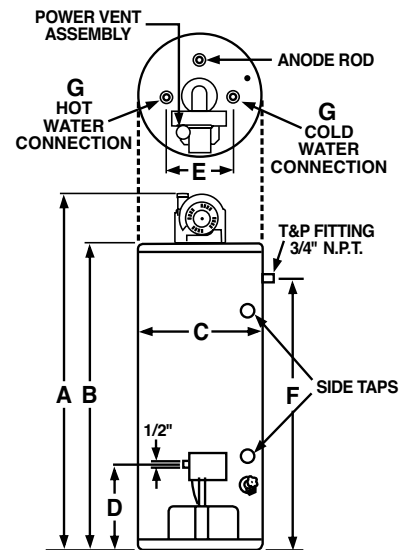

| DIMENSIONAL INFORMATION (All dimensions shown in inches) | | | | | | | | |
|--|----|--------|--------|--------|----|--------|---|--------------------------------|
| MODEL NUMBER | A | B | C | D | E | F | G | APPROX. SHIPPING WEIGHT (LBS.) |
| TPV75-75FV-2 | 72 | 60-1/8 | 26-1/4 | 14-3/4 | 11 | 53-1/4 | 1 | 330 |

| RECOVERY CAPACITIES | | TEMPERATURE RISE - DEGREES F - GALLONS PER HOUR | | | | | | | | | |
|---------------------|----------------------------|---|--------|-----|-----|-----|-----|------|------|------|----|
| MODEL NUMBER | INPUT BTU/H NATURAL & L.P. | 40° | 50° | 60° | 70° | 80° | 90° | 100° | 110° | 120° | |
| | | TPV75-75FV-2 | 75,000 | 173 | 138 | 115 | 99 | 86 | 77 | 69 | 63 |
| TPV75-75PFV-2 | 70,000 | 161 | 129 | 107 | 92 | 81 | 72 | 64 | 59 | 54 | |