

FEATURE SHEET

Residential Gas Water Heaters | *Classic DV Co-Axial Series*



ENERGY SAVING SOLUTIONS FOR MANUFACTURED HOUSING

Professional *Classic*[®] Direct Vent Co-Axial Gas Water Heaters:

Built for your manufactured home – flexible, efficient and FVIR compliant

- Roof jack flange adjustment range available up to 34° (8 - 12)
- Smaller footprint – no external air tube
- Easy, flexible installation



The new degree of comfort.™



The new degree of comfort™



Residential Gas
Professional Classic Direct Vent Co-Axial
Water Heaters for Manufactured Housing

Professional Classic® Direct Vent Co-Axial gas water heaters for Manufactured Housing that are FVIR compliant

Efficiency

- .59 - .63 UEF

Performance

- FHR: 78 gallons for 50-gallon model and 65 gallons for 40-gallon model
- Recovery: 30.3 to 36.4 GPH at a 90° F rise, depending on model

Flexibility

- Field convertible controls and burner assembly for natural gas or LP operation included
- Roof jack flange adjustment range available up to 34° (8 - 12)
- New smaller foot print – no external air tube
- Can be installed anywhere in the home
- 3/4" hot and cold top connections
- Easily fits into a standard drain pan

Altitude Certification


- All models certified up to 10,000 ft. above sea level

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements

Longer Life

- Premium grade anode rod provides long-lasting tank protection

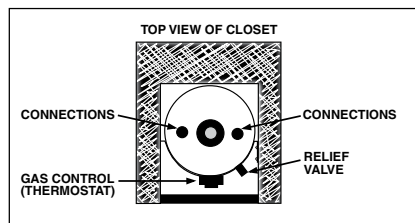

Self Cleaning

- EverKleen™ patented system fights sediment build-up

Plus...

- Certified for manufactured (HUD) and modular construction
- Enhanced flow brass drain valve
- Factory installed temperature and pressure relief valve – side location
- Low lead compliant
- Piezo ignition – easy light pilot, no matches required

Warranty

- 6-Year limited tank and parts warranty*

*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.




Professional Classic Direct Vent Co-Axial for Manufactured Housing
40 and 50-Gallon Capacities
Up to 36,000 Btu/h
Natural and LP Gas



CO-AXIAL ROOF JACK SIZING TABLE

| 34° MAX. (8 - 12 PITCH) ROOF JACK KIT PART NO. | ROOF JACK ADJUSTMENT RANGE (SEE X) |
|--|------------------------------------|
| AP14363A | 24 - 37" |
| AP14363B | 33 - 68" |
| AP14363C | 45 - 97" |
| AP14363D | 60 - 130" |
| AP14363E | 72 - 160" |

NOTE: 42° Max. adjustment roof jacks available. Roof Jacks must be ordered separately with this direct vent water heater and installed in accordance with the instructions furnished with the heater. No other roof jack or vertical vent kit is approved for installation with this heater.

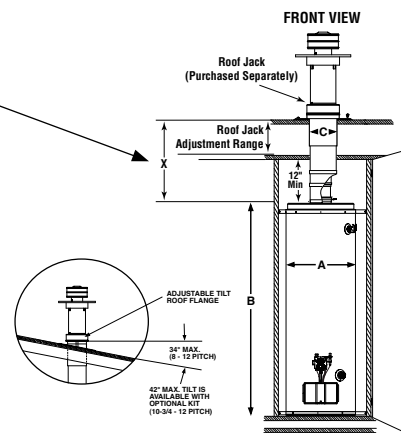

| TYPE | DESCRIPTION | | | FEATURES | | | | | | | | ROUGHING IN DIMENSIONS (SHOWN IN INCHES) | | | | | ENERGY INFO. | |
|------|-------------------------|-----------------------|------------------------|---------------------------|----|-------------------------------|------|---------------------------|----|--------------------------|----|--|---------------|-------------|------------------|----------------|---------------|-----------------------------|
| | NOMINAL GALLON CAPACITY | RATED GALLON CAPACITY | MODEL NUMBER | GAS INPUT IN THOUS. BTU/H | | RECOVERY IN G.P.H. 90° F RISE | | UEF FIRST HR. DEL. G.P.H. | | EF FIRST HR. DEL. G.P.H. | | DIAM. A | TANK HEIGHT B | VENT SIZE C | WATER CONN. SIZE | SHIP WT. (LBS) | ENERGY FACTOR | UNIFORM ENERGY FACTOR (UEF) |
| | | | | NAT. | LP | NAT. | LP | NAT. | LP | NAT. | LP | | | | | | | |
| Tall | 40 | 38 | PROG40-36N RH62 MH DVX | 36 | 30 | 36.4 | 30.3 | 65 | 65 | 65 | 65 | 19-3/4 | 60-1/2 | 5 | 3/4 | 155 | 0.62 | 0.59 |
| Tall | 50 | 48 | PROG50-36N RH60 MH DVX | 36 | 32 | 36.4 | 32.3 | 78 | 78 | 80 | 80 | 21-3/4 | 59-5/8 | 5 | 3/4 | 165 | 0.60 | 0.63 |

Uniform Energy Factor, Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100
Roswell, Georgia 30076 • Rheem.com



INTEGRATED HOME COMFORT

Rheem.com

PRINTED IN U.S.A. 06/17 WP FORM NO. 102GW-10 Rev. 5