



The new degree of comfort.™

SUBMITTAL COVER SHEET

PROJECT NAME _____
LOCATION _____
ARCHITECT _____
ENGINEER _____
CONTRACTOR _____
SUBMITTED BY _____ DATE _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						

ACCESSORIES:

NOTES:



INTEGRATED HOME COMFORT

PRINTED IN U.S.A 01/12 QG FORM NO. M11-1640

SUBMITTAL SHEET FOR PACKAGE GAS/ELECTRIC UNITS EQUIPPED WITH ClearControl™: RKNN-C/RKPN-C/RKQN-C NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

JOB NAME _____
 CONTRACTOR _____
 ENGINEER _____
 LOCATION _____
 ORDER NO. _____
 SUBMITTED FOR ☐ APPROVAL ☐ RECORD
 SUBMITTED BY _____
 DATE _____
 UNIT DESIGNATION _____
 MODEL NO. _____

UNIT DATA

COOLING PERFORMANCE

TOTAL CAPACITY* MBH
 SENSIBLE CAPACITY* MBH
 EFFICIENCY (at AHRI) EER
 PART LOAD EFFICIENCY IPLV
 AMBIENT DB TEMP °F
 ENTERING DB TEMP °F
 ENTERING WB TEMP °F
 LEAVING DB TEMP °F
 LEAVING WB TEMP °F
 TOTAL POWER INPUT kW
 ELEVATION FT
 SOUND POWER DBELS

HEATING PERFORMANCE

GAS HEAT INPUT BTU
 GAS HEAT OUTPUT BTU
 STEADY STATE EFFICIENCY MBH

SUPPLY AIR BLOWER PERFORMANCE

SUPPLY AIR CFM [L/s]
 OUTSIDE AIR CFM [L/s]
 EXTERNAL STATIC PRESSURE IWG
 DUCT CONNECTION LOCATION
 BLOWER SPEED RPM
 MOTOR RATING HP [W]
 BRAKE HORSEPOWER BHP
 POWER INPUT REQUIREMENT kW

ELECTRICAL DATA

POWER SUPPLY Hz
 MINIMUM CIRCUIT AMPACITY AMPS
 MAXIMUM OVERCURRENT DEVICE
 FUSE SIZE AMPS
 HACR CIRCUIT BREAKER AMPS


DIMENSIONS & WEIGHT

HEIGHT _____ IN WIDTH _____ IN DEPTH _____ IN
 TOTAL WEIGHT LBS [kg]
 (including factory options)


CLEARANCES

FRONT 48" [1219 mm] BACK 18" [457 mm]
 BOTTOM 0" TOP 60" [1524 mm]
 LEFT SIDE 18" [457 mm] 36" [914 mm]
 RIGHT SIDE (condenser end) 18" [457 mm]


BACK VIEW

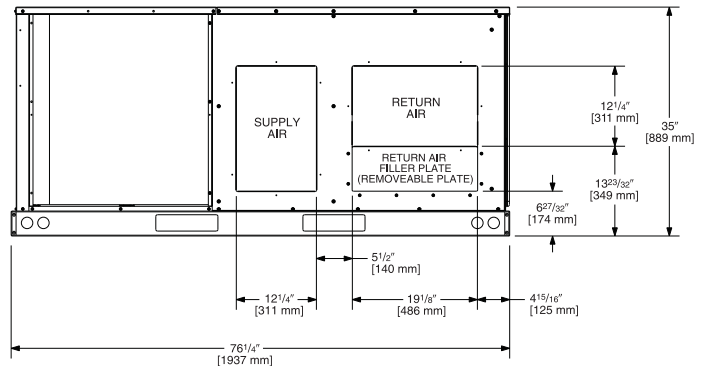


FRONT VIEW

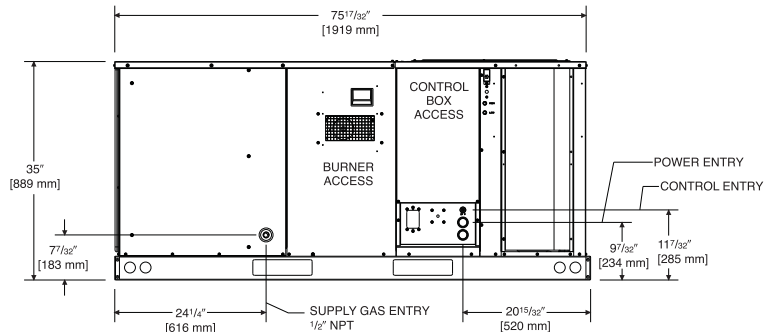


SIDE VIEW

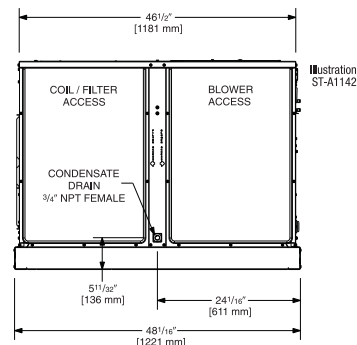

BOTTOM VIEW

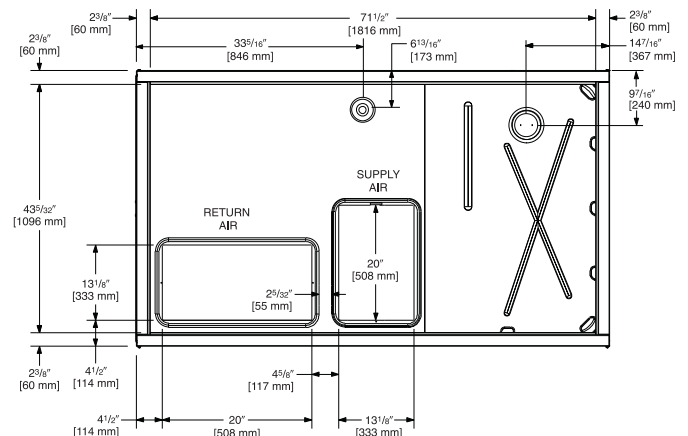

[] Designates Metric Conversions

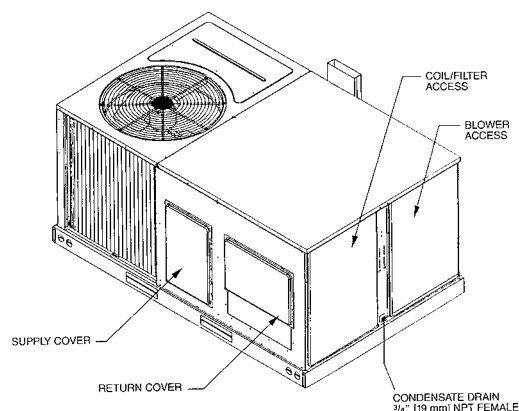

FEATURES FOR GAS/ELECTRIC ROOFTOP UNITS RKNN-C/RKPN-C/RKQN-C 3-5 TONS [10.6-17.6 kW]

- R-410A HFC refrigerant.
- Complete factory charged, wired and run tested.
- Scroll compressors with internal line break overload and high-pressure protection.
- Single stage compressor on all models (except RKQN-C060 utilizes 2 Stage Ultra Tech Scroll).
- Convertible airflow.
- TXV refrigerant metering system on each circuit.
- High Pressure and Low Pressure/Loss of charge protection standard on all models.
- Solid Core liquid line filter drier on each circuit.
- Single slab, Micro Channel designed evaporator coil facilitate easy cleaning for maintained high efficiencies.
- Cooling operation up to 125 degree F ambient.
- Easily removable filter, blower, gas heat, and compressor/control access panels permits prompt service.
- Powder Paint Finish meets ASTM B117 steel coated on each side for maximum protection. G90 galvanized.
- One piece top cover and one piece base pan with drawn supply and return opening for superior water management.
- Externally mounted refrigerant gauge ports for easy service diagnostics.
- Easy to install plug-in; slip in, 100% fully modulating economizer.
- Forkable base rails for easy handling and lifting.
- Single point electrical and gas connections.
- High performance belt drive motor with variable pitch pulleys and quick adjust belt system.
- Permanently lubricated evaporator, condenser and gas heat inducer motors.
- Condenser motors are internally protected, totally enclosed with shaft down design.
- 1 inch filter standard with slide out design. Frame accepts 2" filters.
- Single stage gas valve, direct spark ignition, and induced draft for efficiency and reliability.
- Tubular heat exchange for long life and induced draft for efficiency and reliability.
- Solid state furnace control with on board diagnostics.
- Colored and labeled wiring.
- Factory Installed ClearControl™, Direct Digital Control (DDC) and sensors which can connect to LonWorks™ or BACnet® BAS systems for remote monitoring and control.
- Micro Channel evaporator and condenser delivers superior performance with less refrigerant charge and less weight than conventional copper tube/aluminum fin coils. In addition the all aluminum construction has superior protection against formicary corrosion and aluminum tube rubbing potential. Its easier to clean and has a more robust surface.

ACCESSORIES

Factory Installed

- Disconnect w/Non-Powered Convenience Outlet ☐
- Low Ambient w/Comfort Alert® Control..... ☐
- Single Enthalpy Economizer w/Barometric Relief and DDC ☐
- Single Enthalpy Economizer w/Barometric Relief, Smoke Detector and DDC ☐
- Louver Kit (3 Sides) ☐
- Service Disconnect ☐
- Comfort Alert® Control ☐

Field Installed

- Natural Gas High Altitude Kit ☐
- Propane Conversion Kit..... ☐

- 14" Full Perimeter Roofcurb ☐
- 24" Full Perimeter Roofcurb ☐
- Roofcurb Adapter ☐
- Concentric Diffuser ☐
- Manual Outside Air Intake Damper ☐
- Motorized Outside Air Intake Damper ☐
- Motorized Outside Air Intake Damper w/DDC Feedback ☐
- Dual Enthalpy Adapter..... ☐
- Power Exhaust ☐
- CO₂ Sensor (wall mount with LCD) ☐
- Thermostats ☐
- BACnet® Communication Card ☐
- LonWorks™ Communication Card..... ☐

[] Designates Metric Conversions

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Rheem Sales Company, Inc.
P.O. Box 17010, Fort Smith, AR 72917

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."