

# PERFORMANCE PLUS™



The new degree of comfort.™

## PERFORMANCE PLUS™ Ultra Low NOx gas water heaters offer a 9-year warranty and are SCAQMD rule 1121 compliant with 10ng/J NOx emissions

### Efficiency

- .58 - .64 UEF
- More hot water at a low operating cost

### Performance

- FHR: 84 gallons for 50-gallon model and 71 gallons for 40-gallon model
- Recovery: 38 GPH at a 90° F rise

### Diagnostic Valve

- Self powered diagnostic gas control valve for improved monitoring and service



### Maintenance Free Burner System

- Exclusive fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation



Maintenance Free

### Low Emissions

- Ultra Low NOx radiant burner design
- Stainless steel construction
- SCAQMD Rule 1121 compliant
- Meets 10 ng/J NOx requirements



### Self-Cleaning

- Fights sediment and mineral build-up
- Reduces fuel costs



### Easy to Light

- No matches required

### Longer Life

- Premium grade anode rod provides long-lasting tank protection

### High Altitude Compliant

- All model certified to 10,000 ft. above sea level

### Plus...

- Temperature and pressure relief valve included
- Low lead compliant

### Warranty

- 9-Year limited warranty for tank and parts, 2-year full in-home labor warranty\*

\*See written warranty for complete details

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



## PERFORMANCE PLUS Ultra Low NOx 40 and 50-Gallon Capacities Up to 38,000 Btu/h



LEED Point = 1

See specifications chart on back.



The new degree of comfort.™


## PERFORMANCE PLUS™ Ultra Low NOx Specifications

Fuel Type	Description	Nominal Gallon Capacity	Rated Gallon Capacity	Model Number	Gas Input in Thous. Btu/h	Recovery in G.P.H. 90° F Rise	First Hour Delivery G.P.H.	Ht. to Vent A	Tank Height B	Diam. C	Ht. to Gas Conn. D	Vent Size E	Water Conn. Center F	Ht. to Side T&P Valve G	Water Conn. Size H	Ship Weight (LBS)	Energy Factor	Uniform Energy Factor (UEF)
Natural Gas	Tall	50	48	XG50T09HN38U1	38	38	84	61-1/4	58-3/8	23	14	3 or 4	8	51-3/8	3/4	162	0.62	0.64
Natural Gas	Tall	40	38	XG40T09EN38U0	38	38	71	61-1/2	58-1/2	19	14	3 or 4	8	52-1/4	3/4	127	0.62	0.58

Uniform Energy Factor, Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.



LEED Point = 1

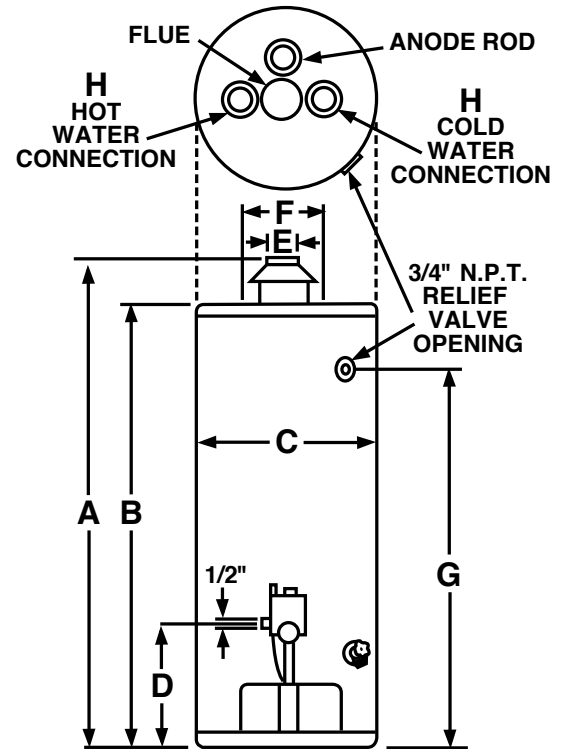

*In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.*

Rheem Water Heating • 101 Bell Road  
Montgomery, Alabama 36117-4305 • www.rheem.com