



The new degree of comfort.™

Hydronic Air Handler Powered by Tankless Technology

RHWB- Series

- Nominal Heating Capacities:
32-90 kBTU [9.38-26.39 kW]



†A.F.U.E. (Annual Fuel Utilization Efficiency) calculated in accordance with Department of Energy test procedures.



Tankless Water Heater Models:

RTG-64DVL indoor direct vent and RTG-64XL outdoor

- Natural and LP models – 11,000 - 150,000 BTU max.
- 6.4 gal./min at 35° F rise max., 5.6 gal./min. at 45° F rise

RTG-84DVL indoor direct vent and RTG-84XL outdoor

- Natural and LP models – 11,000 - 180,000 BTU max.
- 8.4 gal./min at 35° F rise max., 6.7 gal./min. at 45° F rise

RTGH-84DVL indoor direct vent and RTGH-84XL outdoor

- Natural and LP models – 11,000 - 157,000 BTU max.
- 8.4 gal./min at 35° F rise max., 6.6 gal./min. at 45° F rise

RTG-95DVL indoor direct vent and RTG-95XL outdoor

- Natural and LP models – 11,000 - 199,900 BTU max.
- 9.5 gal./min at 35° F rise max., 7.4 gal./min. at 45° F rise


RTGH-95DVL indoor direct vent and RTGH-95XL outdoor

- Natural and LP models – 11,000 - 199,900 BTU max.
- 9.5 gal./min at 35° F rise max., 8.4 gal./min. at 45° F rise

TABLE OF CONTENTS

System Components	3
Model Features & Model Number Identification.....	4
General Data	5-6
Dimensional Data.....	7
Airflow Performance Data	8-9
Water Heater Performance Data	10
Hydronic Air Handler Performance Data	11
Tankless Water Heater-Mid Efficiency Tankless Series	12-13
Tankless Water Heater-Condensing Tankless Series	14-15
Accessories	16
Typical Piping.....	17
Limited Warranty	18

Home Heating & Water Heating Powered by Tankless Technology

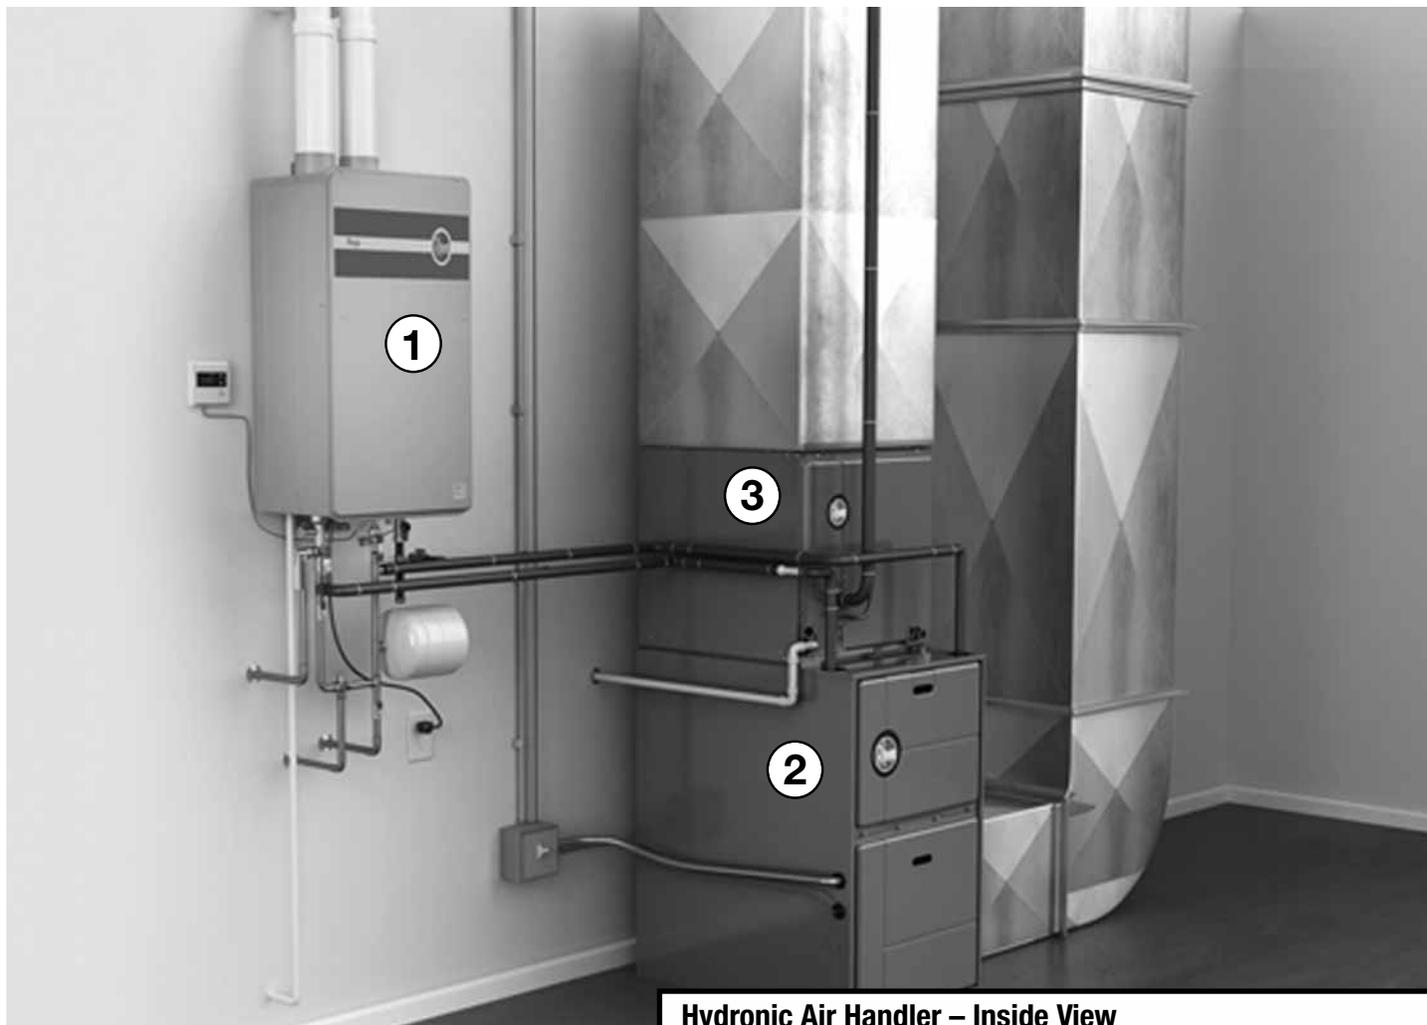

System Components

① Tankless Water Heater

The Rheem tankless water heater serves two purposes in the hydronic system: it provides continuous hot water for use throughout the home. When a call for heat is made, the tankless water heater also acts as the heat-source for air handler, providing both hot water and heating for the home simultaneously.


② Hydronic Air Handler

The hydronic air handler features a hydronic heating coil in place of either electric heating elements or gas-fired heat exchangers. When in heating mode, the hydro pump circulates hot water between the tankless water heater and the hydronic coil.

③ Cooling Coil

In cooling mode, the cooling coil operates the same as any other Rheem heating and cooling system.

Hydronic Air Handler – Inside View

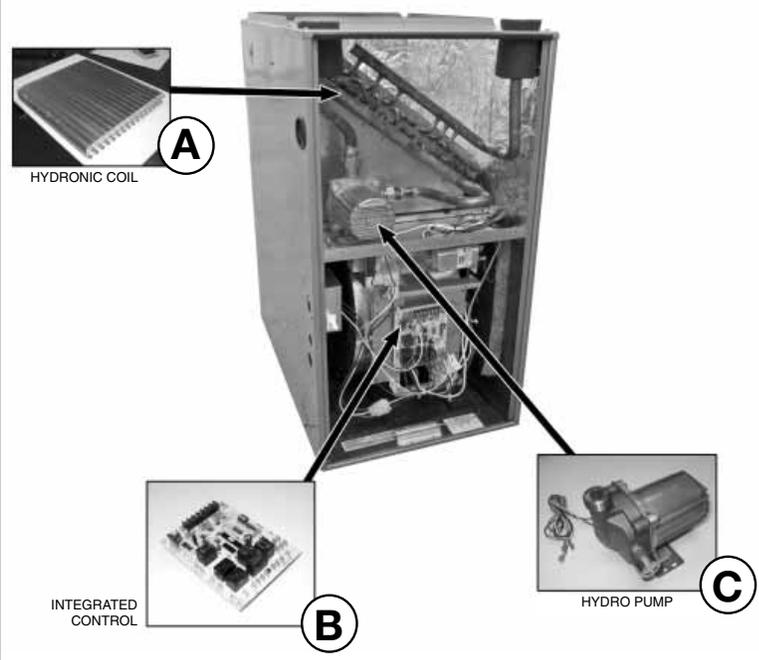

Model Features

Features of the Hydronic Air Handler

- Low profile 34-inch design is lighter, easier to handle and leaves room for optional accessories
- Left or right side electric connections
- Integrated control board features diagnostics, manages all operational functions and provides hookups for humidifier and electronic air cleaner
- An insulated blower compartment makes it one of the quietest hydronic air handlers on the market today
- Pre-paint galvanized steel cabinet
- Molded permanent filter(s)
- Transformer and control fuse protection
- Solid bottom is standard
- A variety of cooling coils and plenums designed to use with the Hydronic Air Handler are available as optional accessories for air conditioning models
- Stainless steel water pump

Features of the Tankless Water Heater

- **Industry best!** Minimum flow rate of .26 GPM, minimum activation flow rate of .40 GPM
- ENERGY STAR® rated models available
- Next generation burner technology
- UMC-117 remote control and 10 ft. of thermostat wire is included
- EZ-Link™ cable available for high demand applications to connect two tankless units to operate as one
- High-altitude capability – up to 9,840 ft. elevation above sea level (no chip required)
- Intelligent electronic controls designed to increase energy efficiency and safety
- Self Diagnostic System

Hydronic Air Handler Model Identification

R	H	W	B	-06W		M	P	36	B
Brand	Application	Type	Design Series	Heating Output Designation		Blower Size	Variations	Heat/Cool Designation	Revision
				Inlet Water Temp = 150F [66°C]	Output BTU/HR [kW]				
R = Rheem	H = Air Handler	W = Water	B = 2nd Series	04W	40,000 [11.7 kW]	M = 11x7 [279 x 178 mm] R = 11x10 [279 x 254 mm]	P = PSC X = Eco Tech™ (ECM)	36 = 1100-1300 CFM [519-613.5 L/s] 48 = 1500-1700 CFM [707.9-802.3 L/s] 60 = 1900-2100 CFM [896.7-991.1 L/s]	B = Rev 1
				06W	60,000 [17.6 kW]				
				08W	80,000 [23.5 kW]				
				10W	90,000 [28.3 kW]				

[] Designates Metric Conversions

IMPORTANT: BEFORE PURCHASING THIS APPLIANCE, READ IMPORTANT ENERGY COST AND EFFICIENCY INFORMATION AVAILABLE FROM YOUR RETAILER.

General Data—PSC Models U.S. and Canadian Models

MODEL NUMBERS	RHWB-04WMP36B	RHWB-06WMP48B	RHWB-08WRP60B	RHWB-10WRP60B
Nominal Heating Capacity BTU/hr [W]	40000	60000	80000	100000
Air Side Temperature Rise* °F [°C]	45-75 [25-41.7]	40-70 [22.2-38.9]	35-65 [19.4-36.1]	35-65 [19.4-36.1]
Heating CFM [L/s] @ .8 WC [.19 kPa]	590 [278]	1000 [471]	1453 [685]	1818 [858]
Cooling CFM [L/s] @ .5 WC [.12 kPa]	1235 [582]	1622 [765]	1871 [883]	1973 [931]
Power Supply (V - HZ - PH)	115 - 60 -1			
Minimum Circuit Ampacity - Amps	10	11.4	14	14
Max Rating of Over Current Protective Device - Amps	18	20.5	25.2	25.2
Maximum Fuse or Circuit Breaker Size	15	20	25	25
Motor HP [W]	1/2 [373]	3/4 [559]	3/4 [559]	3/4 [559]
Blower (D x W) in [mm]	11 x 7 [279 x 178]	11 x 7 [279 x 178]	11 x 10 [279 x 254]	11 x 10 [279 x 254]
Blower Motor Type	PSC			
Pump Type	Wet Rotor			
Pump Power Supply (V - HZ - PH)	115 - 60 -1			
Pump Motor RLA/LRA - Amps	1.8			
Pump HP [W]	1/8			
Pump Maximum Working Pressure psi [kPa]	125 [861]			
Min/Max Working Temperature °F [°C]	160 [71]			
Water Connection Type	Copper Studs			
Inlet Water Connection Diameter in [mm]	3/4 [19]			
Out Water Connection Diameter in [mm]	3/4 [19]			
Return Air Filter Size in [mm]	12 x 16 [305 x 406]		16 x 24 [406 x 609]	
Standard High Velocity Filter Size (L X W X H) in [mm]	15 3/4 x 25 x 1 [400 x 635 x 25]		22 3/4 x 25 x 1 [578 x 635 x 25]	
Shipping Weight LBS [kg]	107 [48.5]	118 [53.5]	137 [62.1]	145 [65.7]

[] Designates Metric Conversions


IMPORTANT: BEFORE PURCHASING THIS APPLIANCE, READ IMPORTANT ENERGY COST AND EFFICIENCY INFORMATION AVAILABLE FROM YOUR RETAILER.

General Data—Eco Tech™ (ECM) Models U.S. and Canadian Models

MODEL NUMBERS	RHWB-04WMX36B	RHWB-06WMX48B	RHWB-08WRX60B	RHWB-10WRX60B
Nominal Heating Capacity BTU/hr [W]	40000	60000	80000	100000
Air Side Temperature Rise* °F [°C]	45-75 [25-41.7]	40-70 [22.2-38.9]	35-65 [19.4-36.1]	35-65 [19.4-36.1]
Heating CFM [L/s] @ .8 WC [.19 kPa]	578 [272]	1030 [485]	1502 [707]	1847 [870]
Cooling CFM [L/s] @ .5 WC [.12 kPa]	1180 [556]	1300 [612]	1645 [775]	1707 [804]
Power Supply (V - HZ - PH)	115 - 60 -1			
Minimum Circuit Ampacity - Amps	10	12.9	12.9	12.9
Max Rating of Over Current Protective Device - Amps	18	23.2	23.2	23.2
Maximum Fuse or Circuit Breaker Size	15	20	20	20
Motor HP [W]	1/2 [373]	3/4 [559]	3/4 [559]	3/4 [559]
Blower (D x W) in [mm]	11 x 7 [279 x 178]	11 x 7 [279 x 178]	11 x 10 [279 x 254]	11 x 10 [279 x 254]
Blower Motor Type	EcoTech / ECM Type			
Pump Type	Wet Rotor			
Pump Power Supply (V - HZ - PH)	115 - 60 -1			
Pump Motor RLA/LRA - Amps	1.8			
Pump HP [W]	1/8			
Pump Maximum Working Pressure psi [kPa]	125 [861]			
Min/Max Working Temperature °F [°C]	160 [71]			
Water Connection Type	Copper Studs			
Inlet Water Connection Diameter in [mm]	3/4 [19]			
Out Water Connection Diameter in [mm]	3/4 [19]			
Return Air Filter Size in [mm]	12 x 16 [305 x 406]		16 x 24 [406 x 609]	
Standard High Velocity Filter Size (L X W X H) in [mm]	15 3/4 x 25 x 1 [400 x 635 x 25]		22 3/4 x 25 x 1 [578 x 635 x 25]	
Shipping Weight LBS [kg]	116 [52.6]	126 [57.2]	146 [66.2]	153 [69.3]

[] Designates Metric Conversions

Hydronic Air Handler Dimensions and Specifications

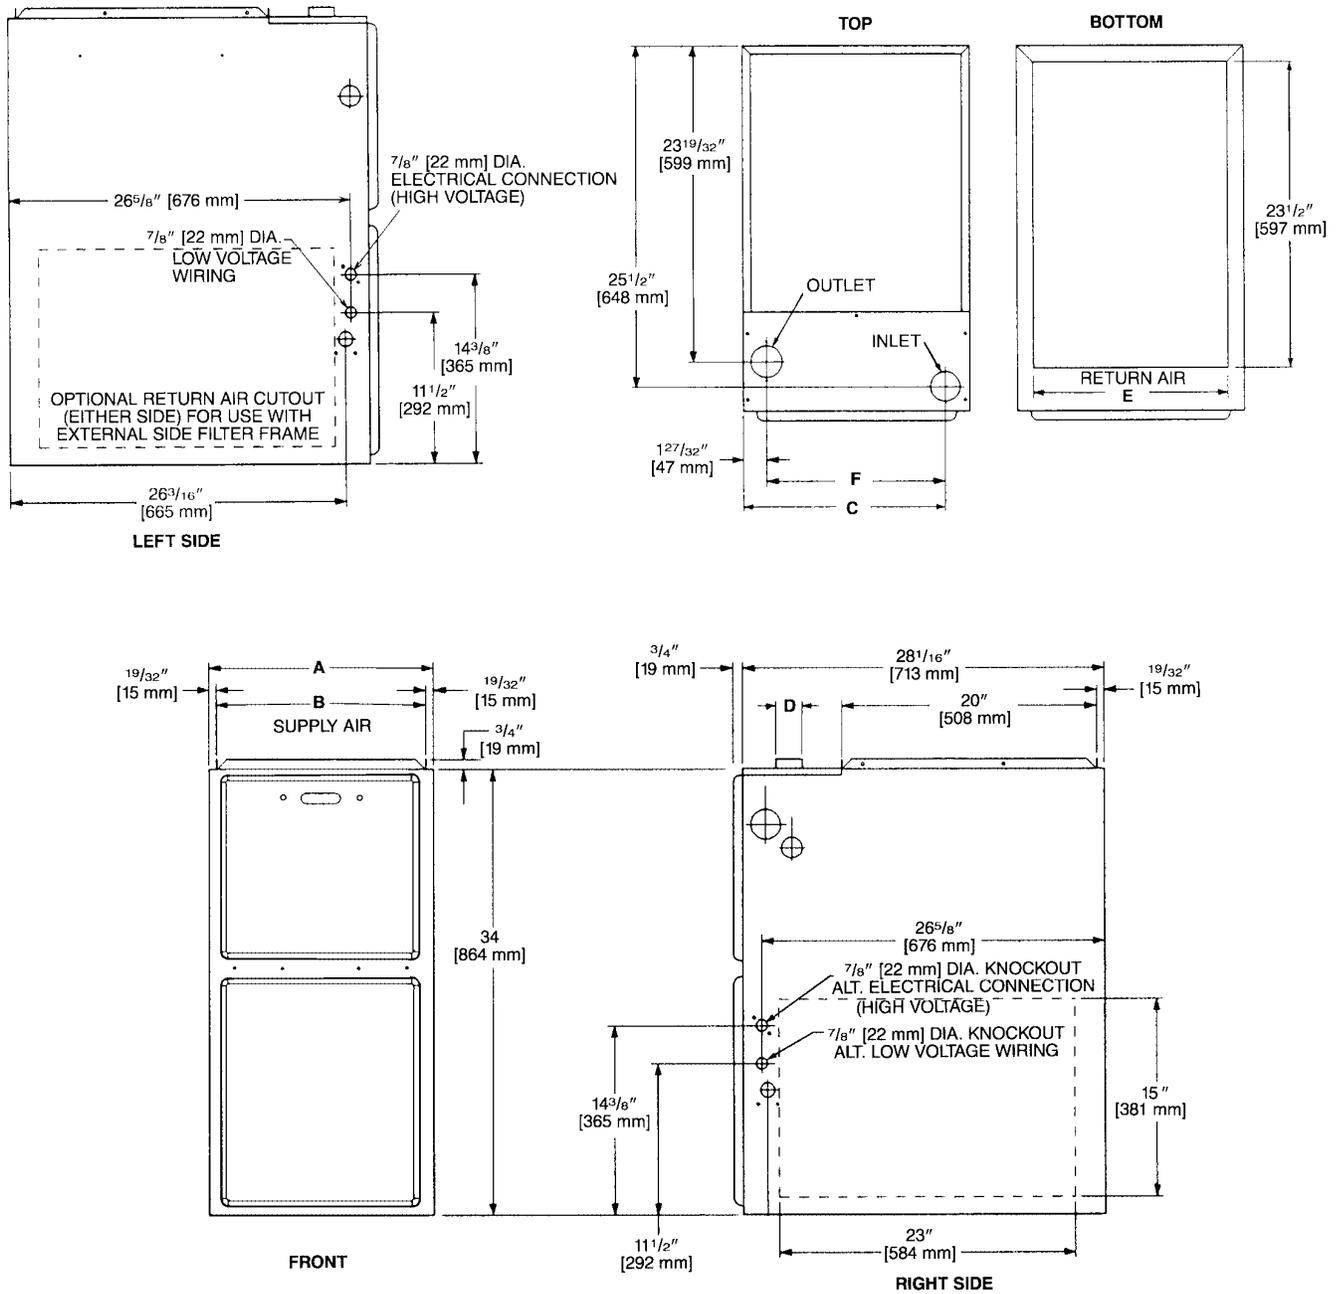

Dimensions and Clearance to Combustible Material (inches) [mm]

MODEL RHWB	A	B	C	D	E	F	LEFT SIDE	MINIMUM CLEARANCE			
								RIGHT SIDE	BACK	TOP	FRONT
04WM	17 ¹ / ₂ [445]	16 ¹¹ / ₃₂ [415]	15 ⁵ / ₈ [397]	3 ¹ / ₄ [19] ID	15 [422]	13 ²⁵ / ₃₂ [350]	0	0	0	1 [25]	0*
06WM	17 ¹ / ₂ [445]	16 ¹¹ / ₃₂ [415]	15 ⁵ / ₈ [397]	3 ¹ / ₄ [19] ID	15 [422]	13 ²⁵ / ₃₂ [350]	0	0	0	1 [25]	0*
08WR	24 ¹ / ₂ [622]	23 ¹¹ / ₃₂ [593]	22 ⁵ / ₈ [575]	3 ¹ / ₄ [19] ID	22 [600]	20 ²⁵ / ₃₂ [528]	0	0	0	1 [25]	0*
10WR	24 ¹ / ₂ [622]	23 ¹¹ / ₃₂ [593]	22 ⁵ / ₈ [575]	3 ¹ / ₄ [19] ID	22 [600]	20 ²⁵ / ₃₂ [528]	0	0	0	1 [25]	0*

*A service clearance of at least 24 inches [634mm] is recommended in front of all air handlers.

[] Designates Metric Conversions

Hydronic Air Handler Airflow Performance—PSC Models

Model	Blower / Motor HP Inches [mm]	CFM [L/s] Air Delivery External Static Pressure Inches Water Column [kPa]										
		Speed	0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.19]	0.9 [.22]	1.0 [.24]
RHWB-04WMP36B	11 x 7 [279 x 178] / 1/2 [373]	Low	794 [375]	775 [366]	749 [353]	719 [339]	686 [324]	655 [309]	621 [293]	590 [278]	534 [252]	473 [223]
		M-Lo	1036 [489]	1024 [483]	1002 [473]	977 [461]	922 [435]	896 [423]	865 [408]	826 [390]	761 [359]	689 [325]
		M-Hi	1202 [567]	1176 [555]	1160 [547]	1100 [519]	1073 [506]	1047 [494]	1008 [476]	969 [457]	926 [437]	890 [420]
		High	1356 [640]	1336 [631]	1301 [614]	1266 [597]	1235 [583]	1202 [567]	1156 [546]	1093 [516]	1030 [486]	959 [453]
RHWB-06WMP48B	11 x 7 [279 x 178] / 3/4 [559]	Low	921 [435]	915 [432]	886 [418]	876 [413]	855 [404]	841 [397]	817 [386]	780 [368]	734 [346]	690 [326]
		M-Lo	1189 [561]	1180 [557]	1179 [556]	1137 [537]	1131 [534]	1102 [520]	1072 [506]	1030 [486]	985 [465]	915 [432]
		M-Hi	1335 [630]	1315 [621]	1306 [616]	1307 [617]	1277 [603]	1246 [588]	1210 [571]	1161 [548]	1090 [514]	1019 [481]
		High	1841 [869]	1795 [847]	1747 [824]	1681 [793]	1622 [765]	1560 [736]	1500 [708]	1420 [670]	1358 [641]	1288 [608]
RHWB-08WRP60B	11 x 10 [279 x 254] / 3/4 [559]	Low	1319 [623]	1307 [617]	1300 [614]	1240 [585]	1236 [583]	1210 [571]	1177 [555]	1149 [542]	1100 [519]	1032 [487]
		M-Lo	1484 [700]	1480 [698]	1471 [694]	1463 [690]	1418 [669]	1385 [654]	1359 [641]	1314 [620]	1246 [588]	1166 [550]
		M-Hi	1687 [796]	1676 [791]	1671 [789]	1611 [760]	1586 [749]	1553 [733]	1513 [714]	1453 [686]	1389 [656]	1284 [606]
		High	1971 [930]	1974 [932]	1948 [919]	1929 [910]	1871 [883]	1806 [852]	1751 [826]	1699 [802]	1610 [760]	1511 [713]
RHWB-10WRP60B	11 x 10 [279 x 254] / 3/4 [559]	Low	1299 [613]	1294 [611]	1308 [617]	1279 [604]	1257 [593]	1231 [581]	1205 [569]	1165 [550]	1122 [530]	1053 [497]
		M-Lo	1515 [715]	1519 [717]	1499 [707]	1487 [702]	1415 [668]	1418 [669]	1394 [658]	1348 [636]	1296 [612]	1221 [576]
		M-Hi	1684 [795]	1695 [800]	1693 [799]	1663 [785]	1620 [765]	1586 [749]	1569 [740]	1514 [715]	1451 [685]	1365 [644]
		High	1954 [922]	1971 [930]	1974 [932]	1982 [935]	1973 [931]	1944 [917]	1917 [905]	1818 [858]	1775 [838]	1700 [802]

Note: Units tested without filters in place.

[] Designates Metric Conversions

Hydronic Air Handler Airflow Performance—Eco Tech™ (ECM) Models

Model	Blower Size in [mm]	Motor HP [Watt]	Blower Speed	CFM [L/s] Air Delivery External Static Pressure Inches Water Column [kPa]															
				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.19]	0.9 [.22]	1.0 [.24]						
RHWB- 04WMX36B	11x7 [279 x 178]	1/2 [343]	Low	960 [453]	891 [420]	836 [394]	781 [368]	731 [344]	682 [322]	630 [297]	578 [273]	540 [255]	460 [217]						
			Med-low	1178 [555]	1118 [527]	1068 [504]	1017 [479]	973 [459]	922 [435]	877 [414]	833 [393]	781 [369]	730 [345]						
			Med-high	1323 [624]	1269 [598]	1222 [576]	1180 [556]	1130 [533]	1089 [514]	1051 [496]	1006 [475]	958 [452]	914 [431]						
			High	1481 [698]	1431 [675]	1381 [651]	1333 [629]	1291 [609]	1250 [590]	1209 [571]	1168 [551]	1122 [530]	1085 [512]						
RHWB- 06WMX48B	11x7 [279 x 178]	3/4 [559]	Low	1092 [515]	1037 [489]	992 [468]	938 [442]	896 [422]	849 [401]	790 [373]	739 [349]	689 [325]	633 [299]						
			Med-low	1360 [641]	1308 [617]	1264 [596]	1222 [576]	1174 [554]	1138 [537]	1095 [517]	1027 [485]	988 [466]	945 [446]						
			Med-high	1462 [689]	1424 [672]	1378 [650]	1340 [632]	1300 [614]	1263 [596]	1223 [577]	1185 [559]	1147 [541]	1111 [524]						
			High	1779 [839]	1743 [822]	1716 [809]	1674 [790]	1638 [801]	1662 [784]	1624 [776]	1588 [749]	1525 [720]	1427 [673]						
RHWB- 08WFX60B	11x10 [279 x 254]	3/4 [559]	Low	1533 [723]	1475 [696]	1412 [666]	1357 [640]	1287 [607]	1239 [585]	1185 [559]	1129 [533]	1069 [505]	1002 [473]						
			Med-low	1658 [782]	1604 [757]	1551 [731]	1500 [707]	1438 [679]	1392 [657]	1336 [631]	1277 [603]	1231 [581]	1174 [554]						
			Med-high	1842 [869]	1782 [841]	1747 [824]	1701 [802]	1645 [776]	1601 [756]	1547 [730]	1502 [709]	1456 [687]	1401 [661]						
			High	2131 [1005]	2074 [978]	2030 [958]	1969 [929]	1929 [910]	1885 [890]	1833 [865]	1786 [843]	1744 [823]	1688 [797]						
RHWB- 10WFX60B	11x10 [279 x 254]	3/4 [559]	Low	1598 [754]	1533 [723]	1471 [694]	1401 [661]	1344 [634]	1286 [607]	1221 [576]	1162 [548]	1099 [519]	1020 [481]						
			Med-low	1731 [816]	1674 [790]	1605 [757]	1546 [729]	1488 [702]	1435 [607]	1377 [650]	1320 [623]	1264 [597]	1206 [569]						
			Med-high	1943 [916]	1877 [885]	1822 [859]	1762 [831]	1707 [806]	1651 [779]	1609 [759]	1552 [732]	1498 [707]	1446 [682]						
			High	2197 [1036]	2151 [1015]	2095 [988]	2047 [966]	1995 [942]	1949 [920]	1896 [895]	1847 [872]	1800 [850]	1745 [824]						

Blower performance measured without filter in place.

[] Designates Metric Conversions

Hydronic Air Handler with Tankless Water Heater Performance

Air Handler Model	Tankless Model	Blower Speed	ESP (In. W.C.)	Heating Air Delivery (CFM) [L/s]	Capacity (BTU/HR) [kW]				
					Entering Water Temperature (°F) (°C)				
					120 [49]	130 [54]	140 [60]	150* [65]	160 [71]
RHWP-04WMP36B RHWP-04WMX36B	RTG-64	High	0.5 [124.5]	1235 [583]	26400 [7.74]	31800 [9.32]	35500 [10.40]	N/A	N/A
	RTG-84				25700 [7.53]	30900 [9.06]	33900 [9.94]	39600 [11.61]	44800 [13.13]
	RTG-95				25600 [7.50]	31500 [9.23]	34600 [10.14]	40000 [11.72]	45400 [13.31]
	RTGH-84				27700 [8.12]	30100 [8.82]	35400 [10.37]	40600 [11.90]	46000 [13.48]
	RTGH-95				25400 [7.44]	30200 [8.85]	32700 [9.58]	40200 [11.78]	45400 [13.31]
RHWP-06WMP48B RHWP-06WMX48B	RTG-53	High	0.5 [124.5]	1622 [765]	32600 [9.55]	39500 [11.58]	47500 [13.92]	N/A	N/A
	RTG-64				40900 [11.99]	47100 [13.80]	51000 [14.95]	N/A	N/A
	RTG-66				40200 [11.78]	46400 [13.60]	54700 [16.03]	63500 [18.61]	71300 [20.90]
	RTG-74				37700 [11.05]	46200 [13.54]	54000 [15.83]	62700 [18.38]	71300 [20.90]
	RTG-84				40000 [11.72]	47800 [14.01]	52100 [15.27]	60300 [17.67]	68100 [19.96]
	RTG-95				37200 [10.90]	45200 [13.25]	50900 [14.92]	59200 [17.35]	66400 [19.46]
	RTGH-84				38600 [11.31]	44300 [12.98]	49000 [14.36]	55300 [16.21]	62000 [18.17]
	RTGH-95				33900 [9.94]	43300 [12.69]	53800 [15.77]	60600 [17.76]	69500 [20.37]
RHWP-08WRP60B RHWP-08WRX60B	RTG-53	Med-High	0.5 [124.5]	1586 [749]	35000 [10.26]	41300 [12.10]	50600 [14.83]	N/A	N/A
	RTG-64				42000 [12.31]	50900 [14.92]	53400 [15.65]	N/A	N/A
	RTG-66				40400 [11.84]	50500 [14.80]	56500 [16.56]	65500 [19.20]	73600 [21.57]
	RTG-74				40300 [11.81]	49700 [14.57]	58800 [17.23]	71600 [20.98]	81600 [23.91]
	RTG-84				45800 [13.42]	53300 [15.62]	56900 [16.68]	66900 [19.61]	76000 [22.27]
	RTG-95				45300 [13.28]	53100 [15.56]	60000 [17.58]	70500 [20.66]	80700 [23.65]
	RTGH-84				45900 [13.45]	54900 [16.09]	59000 [17.29]	67500 [19.78]	75900 [22.24]
	RTGH-95				44900 [13.16]	52700 [15.44]	58300 [17.09]	65200 [19.11]	73100 [21.42]
RHWP-10WRP60B RHWP-10WRX60B	RTG-53	Med-High	0.5 [124.5]	1620 [765]	35500 [10.40]	44500 [13.04]	53300 [15.62]	N/A	N/A
	RTG-64				40800 [11.96]	48000 [14.07]	53200 [15.59]	N/A	N/A
	RTG-66				48300 [14.16]	57800 [16.94]	62100 [18.20]	71800 [21.04]	83000 [24.32]
	RTG-74				49300 [14.45]	59600 [17.47]	69500 [20.37]	79100 [23.18]	89700 [26.29]
	RTG-84				43200 [12.66]	51800 [15.18]	56900 [16.68]	65100 [19.08]	75400 [22.10]
	RTG-95				48300 [14.16]	58200 [17.06]	61000 [17.88]	71000 [20.81]	79800 [23.39]
	RTGH-84				44600 [13.07]	53000 [15.53]	56000 [16.41]	65400 [19.17]	74400 [21.80]
	RTGH-95				44600 [13.07]	52000 [15.24]	56500 [16.56]	65400 [19.17]	75500 [22.12]

CFM = Cubic Feet Per Minute

ESP = External Static Pressure

*Recommended Operating Point

Inlet Air at 72°F [22°C]

Capacities are based on a piping arrangement with a total equivalent length of 100 ft [30m].

Entering water temperatures must not exceed 160°F [71°C]

[] Designates Metric Conversions

Sample Hydronic Air Handler Performance

SAMPLE HYDRONIC AIR HANDLER PERFORMANCE									
	WATER INLET TEMP (°F) [°C]	WATER OUTLET TEMP (°F) [°C]	WATER FLOW		AIR INLET TEMP (°F) [°C]	AIR OUTLET TEMP (°F) [°C]	AIR CFM [L/s]	CAPACITY (BTU/HR) [kW]	AIR TEMP RISE (°F) [°C]
			LB/HR	GPM					
RHWB-04WMP36B RHWB-04WMX36B	120 [49]	110 [43]	[kg/hr]	4	68 [20]	106 [41]	646 [305]	20900 [6.13]	30 [17]
	130 [54]	117 [47]	2000/ [907]			113 [45]		25800 [7.56]	37 [21]
	140 [60]	125 [52]				122 [50]		29800 [8.73]	43 [24]
	150 [66]	132 [56]				130 [54]		35000 [10.26]	50 [28]
	160 [71]	140 [60]				137 [58]		40000 [11.72]	57 [32]
RHWB-06WMP48B RHWB-06WMX48B	120 [49]	100 [38]	2000/ [907]	4	68 [20]	105 [41]	1000 [472]	38200 [11.20]	31 [17]
	130 [54]	108 [42]				109 [43]		44900 [13.16]	37 [21]
	140 [60]	115 [46]				116 [47]		50600 [14.83]	42 [23]
	150 [66]	120 [49]				126 [52]		60000 [17.58]	49 [27]
	160 [71]	126 [52]				129 [54]		67100 [19.67]	55 [31]
RHWB-08WRP60B RHWB-08WRX60B	120 [49]	97 [36]	2000/ [907]	4	68 [20]	103 [39]	1450 [684]	45500 [13.33]	26 [14]
	130 [54]	103 [39]				108 [42]		53700 [15.74]	31 [17]
	140 [60]	109 [43]				113 [45]		62500 [18.32]	36 [20]
	150 [66]	114 [46]				120 [49]		71800 [21.04]	42 [23]
	160 [71]	120 [49]				123 [51]		80500 [23.59]	47 [26]
RHWB-10WRP60B RHWB-10WRX60B	120 [49]	96 [36]	2000/ [907]	4	68 [20]	100 [38]	1800 [850]	47200 [13.83]	27 [15]
	130 [54]	101 [38]				110 [43]		57800 [16.94]	33 [18]
	140 [60]	106 [41]				112 [44]		66900 [19.61]	38 [21]
	150 [66]	111 [44]				119 [48]		77000 [22.57]	44 [24]
	160 [71]	106 [46]				124 [51]		86800 [25.44]	50 [28]

CFM = Cubic Feet Per Minute

Performance is based on the following assumptions:

- 1) an estimated 100 ft. [30m] equivalent length of 0.75-inch piping
- 2) 0.50" [13] w.c. of external air static.

[] Designates Metric Conversions

Rheem Prestige™ RTGH is a series of high efficiency condensing tankless gas water heaters designed for continuous hot water

Efficiency

- 94% energy efficient with stainless steel condensing heat exchanger
- Intelligent electronic controls designed to increase energy efficiency and safety
- Third party efficiency listed by AHRI

Performance

- Industry First! 0.26 GPM minimum flow rate, 0.40 GPM minimum activation flow rate
- RTGH-95 for 3 bathroom homes*–
9.5 gal./min. at 35°F rise max.,
8.4 gal./min. at 45°F rise
SCAQMD rule 1146.2 compliant
- RTGH-84 for 2-3 bathroom homes*–
8.4 gal./min. at 35°F rise max.,
6.6 gal./min. at 45°F rise

Compact Size

- Compact space saving design – about the size of a medicine cabinet

Self-Diagnostic System

- Self-diagnostic system for easy installation and service.
- Digital display shows temperature setting and maintenance codes

Technology

- Two-pipe direct vent system designed for PVC pipe, see instructions for details
- Hot start programming helps minimize fluctuation in water temperature, referred to as “cold water sandwich,” during periods of frequent on/off operation
- Built-in electric blower
- Exclusive! Guardian overheat film wrap (OFW)
- EZ-Link cable available for higher demand applications to connect two tankless units to operate as one
- Manifold up to six units with an optional MIC-6 manifold control board
- Manifold up to 20 units with the optional MIC-185 plus the MICS-180 manifold control assembly

High Altitude Compliant

- High-altitude capability – up to 9,840 ft. elevation above sea level

Plus...

- Up to 38 ft. of 3" PVC Pipe or 5 ft. of 2" PVC Pipe, see instructions for details
- Digital remote control and 10 ft. of thermostat wire included
- Supplied with a 120 volt power cord (indoor models only)
- Freeze protection to -30°F
- EZ- Spec™ Sizing Software – advanced online tool that takes the guess work out of sizing tankless applications – available at www.rheem.com/tankless

Warranty

- 12-Year on heat exchanger, 5-year on parts and 1-year on labor
- See Residential Warranty Certificate for complete information

Commercial Applications

The RTGH Condensing Tankless Series can be upgraded for high-temperature commercial use.

- Temperature range is 85°F to 185°F

RTGH-95 Upgrade Kits

RTG20240A for RTGH-95DVLN
 RTG20240B for RTGH-95DVLP
 RTG20240C for RTGH-95XLN
 RTG20240D for RTGH-95XLP

RTGH-84 Upgrade Kits

RTG20241A for RTGH-84DVLN
 RTG20241B for RTGH-84DVLP
 RTG20241C for RTGH-84XLN
 RTG20241D for RTGH-84XLP

Note: These upgrade kits are not compatible with previous models. See the 2012 Tankless Parts Catalog for a complete listing.

* Based on simultaneous showers using 2.5 gallons per minute. Flow rates vary depending on temperature of cold water supply.



RTGH-DV
 Indoor Direct Vent Model
 11,000-199,900 Btu/h
 Natural and LP Gas



RTGH-X
 Outdoor Model
 11,000-199,900 Btu/h
 Natural and LP Gas



LEED Points = 2

Rheem Prestige™ RTGH-95 Specifications for 3 Bathroom Homes

DESCRIPTION			FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)						ENERGY INFO.		
MODEL NUMBER	GAS INPUT BTU/H	TYPE	TEMP. RANGE	MIN. FLOW/ACTIVATION GPM	GPM @ 77° RISE MAX.	GPM @ 45° RISE MAX.	MAX. GPM	CONNECTION		HEIGHT	WIDTH	DEPTH	VENT DIAM.	SHIP. WEIGHT (LBS.)	ENERGY FACTOR	% OF THERM. EFFICIENCY	D.O.E. ANN. OP. COST NAT/LP
								WATER	GAS								
RTGH-95DVLN†	11,000-199,900	Indoor Direct Vent	85° to 140° F	0.26/0.40	4.9	8.4	9.5	3/4	3/4	27-1/2	18-1/2	9-3/4	2" or 3" PVC 2-Pipe	82	.94	94%	\$194/326
RTGH-95XLN†	11,000-199,900	Outdoor	85° to 140° F	0.26/0.40	4.9	8.4	9.5	3/4	3/4	27-1/2	18-1/2	9-3/4	N/A	82	.94	94%	\$194/326

Rheem Prestige™ RTGH-84 Specifications for 2-3 Bathroom Homes

DESCRIPTION			FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)						ENERGY INFO.		
MODEL NUMBER	GAS INPUT BTU/H	TYPE	TEMP. RANGE	MIN. FLOW/ACTIVATION GPM	GPM @ 77° RISE MAX.	GPM @ 45° RISE MAX.	MAX. GPM	CONNECTION		HEIGHT	WIDTH	DEPTH	VENT DIAM.	SHIP. WEIGHT (LBS.)	ENERGY FACTOR	% OF THERM. EFFICIENCY	D.O.E. ANN. OP. COST NAT/LP
								WATER	GAS								
RTGH-84DVLN	11,000-157,000	Indoor Direct Vent	85° to 140° F	0.26/0.40	3.9	6.6	8.4	3/4	3/4	27-1/2	18-1/2	9-3/4	2" or 3" PVC 2-Pipe	82	.94	94%	\$194/326
RTGH-84XLN	11,000-157,000	Outdoor	85° to 140° F	0.26/0.40	3.9	6.6	8.4	3/4	3/4	27-1/2	18-1/2	9-3/4	N/A	82	.92	94%	\$194/326

Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures. D.O.E. national average fuel rate natural gas \$1.218/therm; LP \$1.87/gallon.

All models are available in Natural Gas and Propane (LP). For Propane replace the N with P when ordering.

† All models listed here meet or exceed SCQAMD 1146.2.

- Factory set maximum temperature is 120° F. See Use and Care Manual for setting.
- Consult factory for information on sizing the application.
- Add a "C" to the model number when ordering Canadian models. Outdoor models are only for seasonal use in Canada. Please contact Rheem Canada Ltd. for details.

Vent Termination Kits are required for Direct Vent models. Contact your distributor for details.

Proper gas pressure must be ensured to supply tankless gas water heaters – up to 199,900 Btu/h for RTGH-95 models, up to 157,000 Btu/h for RTGH-84 models. (Consult your gas supplier)


Model Number	Temperature Rise (° F)									
	35°	45°	50°	60°	70°	77°	80°	90°	100°	
RTGH-95 Water Flow (GPM)	9.5	8.4	7.6	6.3	5.4	4.9	4.7	4.2	3.8	
RTGH-84 Water Flow (GPM)	8.4	6.6	6.0	5.0	4.3	3.9	3.7	3.3	3.0	

Above estimates are for sizing purposes only.

Maximum Vent Length (intake/outlet):

Number of 90° Elbows	Maximum Length of 2" Straight Pipe	Maximum Length of 3" Straight Pipe
0 or 1	5.0 ft. (1.5 m)	38.0 ft. (11.6 m)
2	3.5 ft. (1.0 m)	36.5 ft. (11.1 m)
3	2.0 ft. (0.6 m)	35.0 ft. (10.6 m)
4	Not Available	33.5 ft. (10.2 m)
5	Not Available	32.0 ft. (9.8 m)
6	Not Available	30.5 ft. (9.3 m)


(ULCs636 pipe must be used for Canada.)

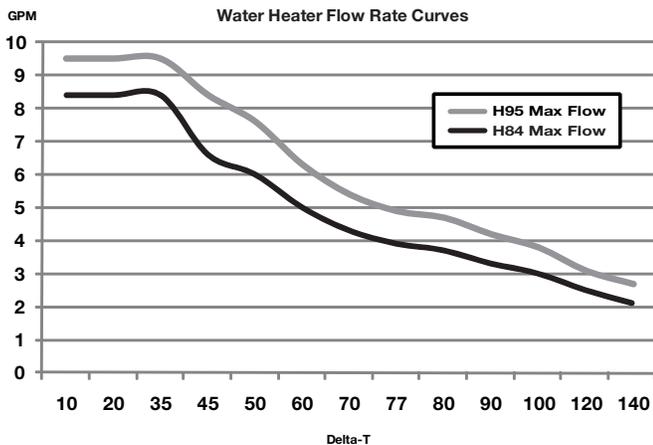

Parts and Accessories

Venting & terminations – 2" or 3" PVC, recess boxes, pipe covers, extra remote controls, EZ-Link, manifolds and cables, service valve kits, service parts, flush kits

For more information on Tankless parts and accessories, see the Parts and Accessories catalog or call 866-720-2076.

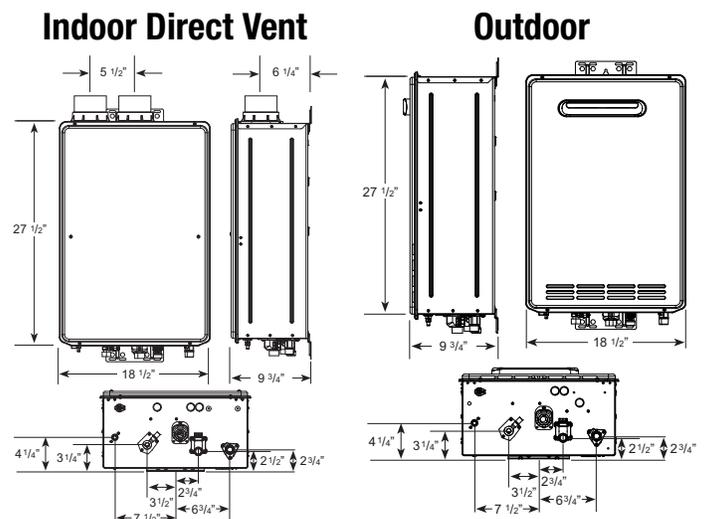

Rheem RTG is a series of ultra low NOx, mid-efficiency tankless gas water heaters designed for continuous hot water

Efficiency

- 82% energy efficient with stainless steel condensing heat exchanger
- Intelligent electronic controls designed to increase energy efficiency and safety
- Third party efficiency listed by AHRI

Performance

- Industry First! 0.26 GPM minimum flow rate, 0.40 GPM minimum activation flow rate
- RTG-95 for 3 bathroom homes*–
9.5 gal./min. at 35°F rise max.,
8.4 gal./min. at 45°F rise
- RTG-84 for 2-3 bathroom homes*–
8.4 gal./min. at 35°F rise max.,
6.6 gal./min. at 45°F rise
- RTG-64 for 1-2 bathroom homes*–
6.4 gal./min. at 35°F rise max.,
5.6 gal./min. at 45°F rise

Self-Diagnostic System

- Self-diagnostic system for easy installation and service
- Digital display shows temperature setting and maintenance codes

Technology

- 3"/5" concentric vent system with Integrated condensate collector
- Hot start programming helps minimize fluctuation in water temperature, referred to as "cold water sandwich", during periods of frequent on/off operation
- Connects to Metal Fab. Inc., 3"/5" concentric venting without an adapter
- Built-in electric blower
- Exclusive! Guardian overhear film wrap (OFW)
- EZ-Link cable available for higher demand applications to connect two tankless units to operate as one
- Manifold up to six units with an optional MIC-6 manifold control board
- Manifold up to 20 units with the optional MIC-185 plus the MICS-180 manifold control assembly

Low Emissions

- Environmentally friendly Ultra Low NOx burner meets SCAQMD rule 1146.2 requirements

High Altitude Compliant

- High-altitude capability – up to 9,840 ft. elevation above sea level

Plus...

- Digital remote control and 10 ft. of thermostat wire included
- Supplied with a 120 volt power cord (indoor models only)
- Freeze protection to -30°F
- EZ- Spec™ Sizing Software – advanced online tool that takes the guess work out of sizing tankless applications – available at www.rheem.com/tankless

Warranty

- 12-Year on heat exchanger, 5-year on parts and 1-year on labor
- See Residential Warranty Certificate for complete information

Commercial Applications

RTG Tankless Series can be upgraded for high-volume commercial use

- Temperature range is 85°F to 185°F

RTG-95 Upgrade Kits

RTG20236A for RTG-95DVLN
RTG20236B for RTG-95DVLP
RTG20236C for RTG-95XLN
RTG20236D for RTG-95XLP

RTG-84 Upgrade Kits

RTG20237A for RTG-84DVLN
RTG20237B for RTG-84DVLP
RTG20237C for RTG-84XLN
RTG20237D for RTG-84XLP

Note: These upgrade kits are not compatible with previous models. See the 2012 Tankless Parts Catalog for a complete listing.

* Based on simultaneous showers using 2.5 gallons per minute. Flow rates vary depending on temperature of cold water supply.



RTG-DVL

Indoor Direct Vent Model
11,000-199,900 Btu/h
Natural and LP Gas



RTG-XL

Outdoor Model
11,000-199,900 Btu/h
Natural and LP Gas



LEED Points = 2

Specifications

DESCRIPTION			FEATURES						ROUGHING IN DIMENSIONS (SHOWN IN INCHES)						ENERGY INFO.		
MODEL NUMBER	GAS INPUT BTU/H	TYPE	TEMP. RANGE	MIN. FLOW/ACTIVATION GPM	GPM @ 77° RISE MAX.	GPM @ 45° RISE MAX.	MAX. GPM	CONNECTION		HEIGHT	WIDTH	DEPTH	VENT DIAM.	SHIP. WEIGHT (LBS.)	ENERGY FACTOR	% OF THERM. EFFICIENCY	D.O.E. ANN. OP. COST NAT/LP
								WATER	GAS								
RTG-95 ULTRA LOW NO_x SERIES FOR 3 BATHROOM HOMES																	
RTG-95DVLN	11,000-199,900	Indoor Direct Vent	85° to 140° F*	0.26/0.40	4.3	7.4	9.5	3/4	3/4	25-5/8	13-7/8	9-7/8	3 by 5 CONCENTRIC	54	.82	82%	\$223/374
RTG-95XLN	11,000-199,900	Outdoor	85° to 140° F*	0.26/0.40	4.3	7.4	9.5	3/4	3/4	23-5/8	13-7/8	8-7/8	N/A	54	.82	82%	\$223/374
RTG-84 ULTRA LOW NO_x SERIES FOR 2-3 BATHROOM HOMES																	
RTG-84DVLN	11,000-180,000	Indoor Direct Vent	85° to 140° F	0.26/0.40	3.9	6.7	8.4	3/4	3/4	25-5/8	13-7/8	9-7/8	3 by 5 CONCENTRIC	54	.82	82%	\$223/374
RTG-84XLN	11,000-180,000	Outdoor	85° to 140° F	0.26/0.40	3.9	6.7	8.4	3/4	3/4	23-5/8	13-7/8	8-7/8	N/A	54	.82	82%	\$223/374
RTG-64 ULTRA LOW NO_x SERIES FOR 1-2 BATHROOM HOMES																	
RTG-64DVLN	11,000 - 150,000	Indoor Direct Vent	85° to 140° F	0.26/0.40	3.3	5.6	6.4	3/4	3/4	25-5/8	13-7/8	9-7/8	3 by 5 CONCENTRIC	54	.82	82%	\$223/374
RTG-64XLN	11,000 - 150,000	Outdoor	85° to 140° F	0.26/0.40	3.3	5.6	6.4	3/4	3/4	23-5/8	13-7/8	8-7/8	N/A	54	.82	82%	\$223/374

Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures. D.O.E. national average fuel rate natural gas \$1.218/therm; LP \$1.87/gallon.

All models are available in Natural Gas and Propane (LP). For Propane replace the N with P when ordering.


- SCQAMD rule 1146.2 compliant.
- Factory set maximum temperature is 120° F. See Use and Care Manual for setting.
- Consult factory for information on sizing the application.
- Add a "C" to the model number when ordering Canadian models. Outdoor models are only for seasonal use in Canada. Please contact Rheem Canada Ltd. for details.

Vent Termination Kits are required for Direct Vent models. Contact your distributor for details.

Proper gas pressure must be ensured to supply tankless gas water heaters – up to 199,900 Btu/h for RTG-95 models, up to 180,000 Btu/h for RTG-84 models and up to 150,000 Btu/h for RTG-64 models. (Consult your gas supplier)

Model Number	Temperature Rise (° F)								
	35°	45°	50°	60°	70°	77°	80°	90°	100°
RTG-95 Water Flow (GPM)	9.5	7.4	6.6	5.5	4.7	4.3	4.1	3.7	3.3
RTG-84 Water Flow (GPM)	8.4	6.7	6.1	5.1	4.3	3.9	3.8	3.4	3.0
RTG-64 Water Flow (GPM)	6.4	5.6	5.1	4.2	3.6	3.3	3.2	2.8	2.5

Above estimates are for sizing purposes only.

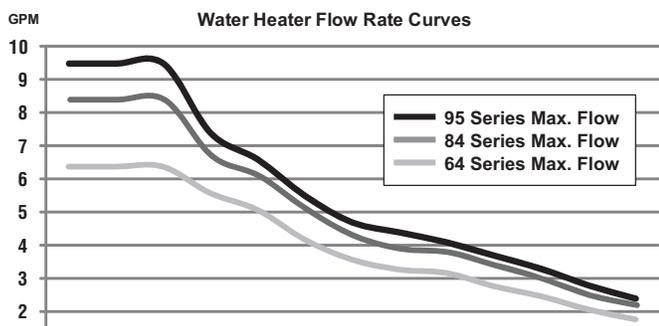

Parts and Accessories

Venting & terminations, recess boxes, pipe covers, extra remote controls, EZ-Link, manifolds and cables, service valve kits, service parts, flush kits


For more information on Tankless parts and accessories, see the Parts and Accessories catalog or call 866-720-2076.

Maximum Vent Length (intake/outlet):


Number of 90° Elbows	Maximum Length of Straight Pipe
1	39.0 ft. (12.0 m)
2	37.5 ft. (11.5 m)
3	36 ft. (11 m)
4	34.5 ft. (10.5 m)
5	33.0 ft. (10.0 m)
6	31.5 ft. (9.5 m)

(Manufacturer approved venting required)

Indoor Direct Vent

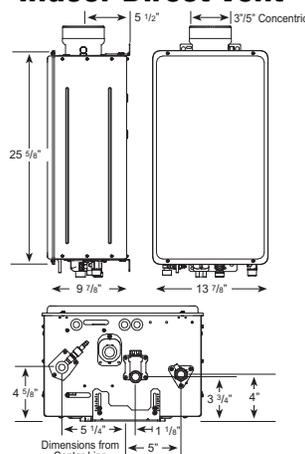

Outdoor

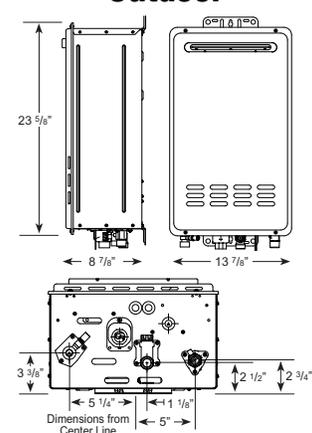

ACCESSORIES

RETURN AIR PLENUM: RXGR-C17B
 RXGR-C24B

EXTERNAL BOTTOM FILTER RACK: RXGF-CB

EXTERNAL SIDE FILTER RACK: RXGF-CA

FILTER RACK FILTER SIZES* INCHES [mm]		
MODEL	RXGF-CB (BOTTOM)	RXGF-CA (SIDE)
RHWB-04WMAES	15 ³ / ₄ x 25 [400 x 635]	15 ³ / ₄ x 25 [400 x 635]
RHWB-06WGAES	15 ³ / ₄ x 25 [400 x 635]	15 ³ / ₄ x 25 [400 x 635]
RHWB-08WRAJS	22 ³ / ₄ x 25 [578 x 635]	15 ³ / ₄ x 25 [400 x 635]
RHWB-10WRAJS	22 ³ / ₄ x 25 [578 x 635]	15 ³ / ₄ x 25 [400 x 635]

*Filter racks are shipped without filters.

Filters shipped with hydronic air handler may be used or a suitable
 1" [25.4 mm] filter.

PLENUM DATA FOR "INDOOR COOLING" COILS

Plenum adapters are required in some instances for use on applications when plenum and hydronic air handler size do not match. See Indoor Coil Specification Sheet for Details.

AIR HANDLER WIDTH IN. [mm]	PLENUM WIDTH IN. [mm]	PLENUM ADAPTER	COIL PLENUM
17 ¹ / ₂ [445]	16 ¹ / ₄ [413]	RXAA-C185	RXAL-B16BU
17 ¹ / ₂ [445]	20 ¹ / ₄ [514]	RXAA-C173	RXAL-B20BU
17 ¹ / ₂ [445]	21 ⁵ / ₈ [549]	RXAA-C187	RXAL-B21BU
17 ¹ / ₂ [445]	25 ¹ / ₄ [641]	RXAA-C174	RXAL-B25BU
24 ¹ / ₂ [622]	25 ¹ / ₄ [641]	RXAA-C177	RXAL-B25BU
24 ¹ / ₂ [622]	21 ⁵ / ₈ [549]	RXAA-C187	RXAL-B21BU


[] Designates Metric Conversions

TANKLESS WATER HEATER ACCESSORIES

Visit RheemTankless.com for a current listing of Rheem Tankless accessories.

Typical Piping Arrangement for Direct Space Heating and Domestic Water Supply with Tankless

KEY			
	3/4" Ball Valve(BV)		Circulating Pump
	Check Valve		Pressure Relief Valve
	3/4" Union		Tempering Valve
	Drain Valve(DV)	All piping to be 3/4 inch.	

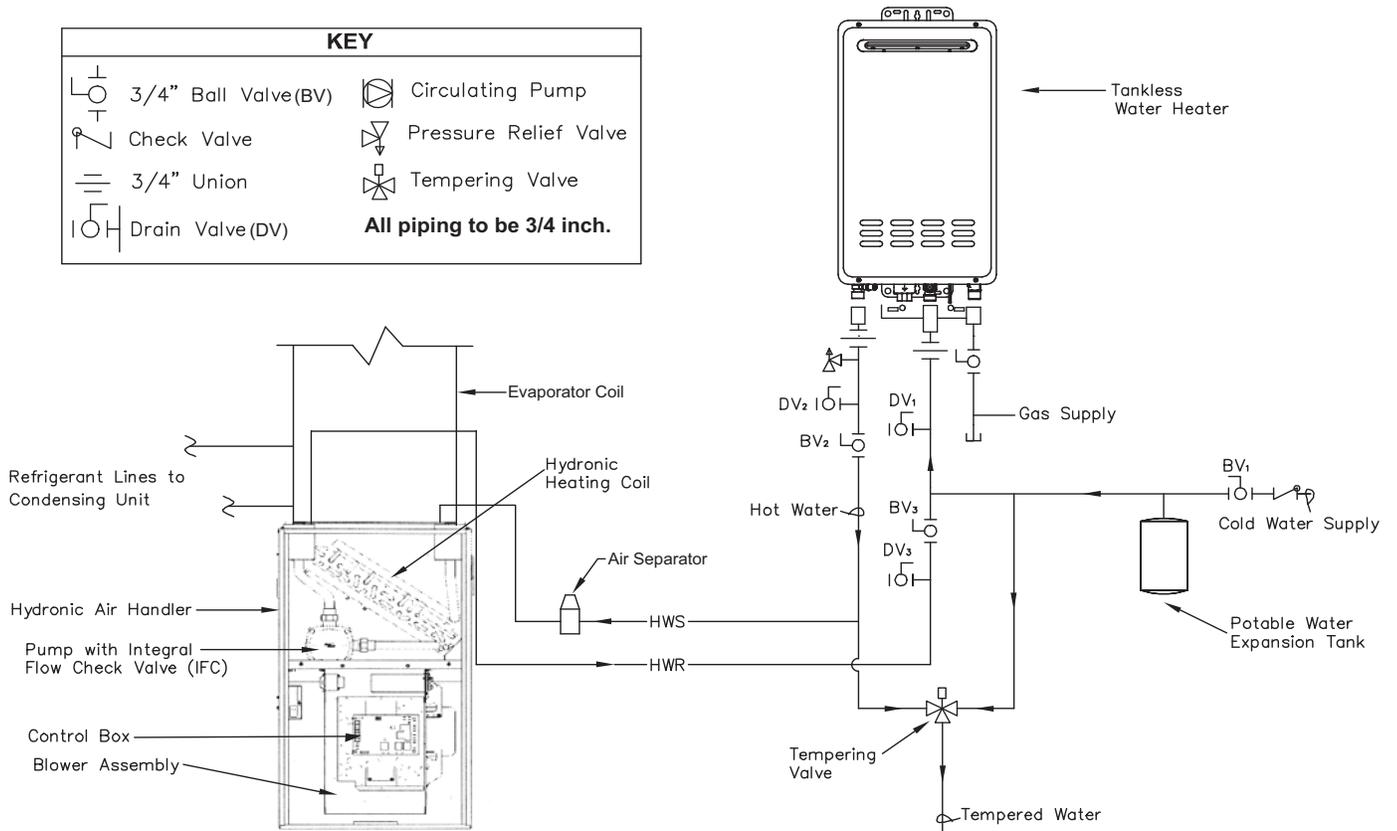

GENERAL TERMS OF LIMITED WARRANTY*

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Labor*One (1) Year
Air Handler Heat Exchanger/Coil*Five (5) Years
Any Other Part*Five (5) Years



The new degree of comfort.™

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Heating, Cooling & Water Heating • P.O. Box 17010
Fort Smith, Arkansas 72917 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5



INTEGRATED HOME COMFORT

PRINTED IN U.S.A 01/14 QG FORM NO. H11-547 REV. 3