



The new degree of comfort.™

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

SUBMITTED BY _____ DATE _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						

ACCESSORIES:


NOTES:




INTEGRATED HOME COMFORT

PACKAGE AIR CONDITIONER:
RLNL-C Series
With ClearControl™
Nominal Sizes 15-25 Tons [52.8-87.9 kW]
RLNL-H Series
With ClearControl™
With VFD Technology
Nominal Sizes 15-25 Tons [52.8-87.9 kW]


JOB NAME _____
 CONTRACTOR _____
 ENGINEER _____
 LOCATION _____
 ORDER NO. _____
 SUBMITTED FOR APPROVAL RECORD
 SUBMITTED BY _____
 DATE _____
 UNIT DESIGNATION _____
 MODEL NO. _____

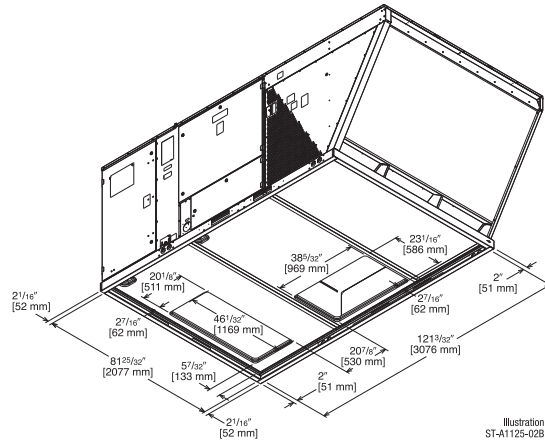

BOTTOM VIEW

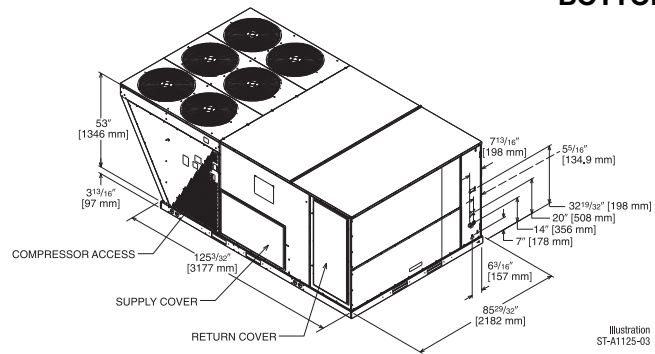

ROOFCURB INSTALLATION

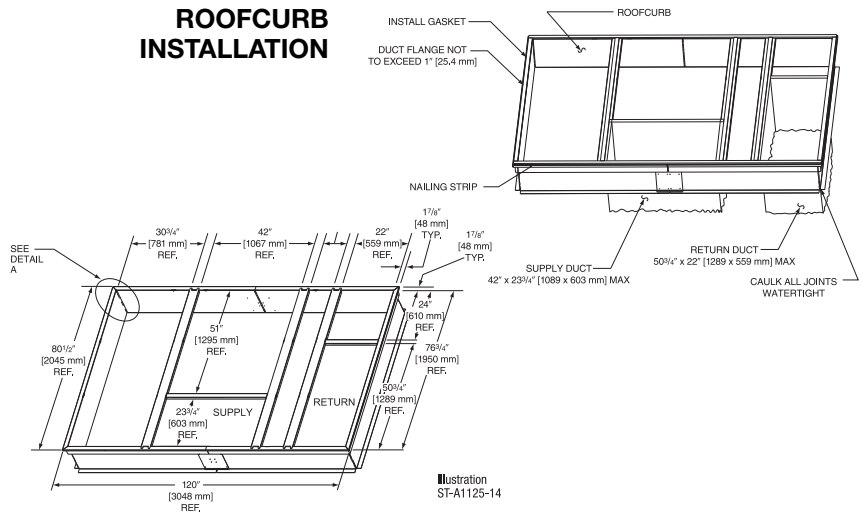

UNIT DATA
COOLING PERFORMANCE

TOTAL CAPACITY*	_____	MBH
SENSIBLE CAPACITY*	_____	MBH
EFFICIENCY (at AHRI).....	_____	EER
PART LOAD EFFICIENCY.....	_____	EER
AMBIENT DB TEMP.....	_____	°F
ENTERING DB TEMP.....	_____	°F
ENTERING WB TEMP.....	_____	°F
LEAVING DB TEMP.....	_____	°F
LEAVING WB TEMP.....	_____	°F
TOTAL POWER INPUT.....	_____	kW
ELEVATION.....	_____	FT
SOUND POWER.....	_____	DBELS

HEATING PERFORMANCE

ELECTRIC HEAT CAPACITY.....	_____	kW
-----------------------------	-------	----

SUPPLY AIR BLOWER PERFORMANCE

SUPPLY AIR.....	_____	CFM [L/s]
OUTSIDE AIR.....	_____	CFM [L/s]
EXTERNAL STATIC PRESSURE.....	_____	IWG
DUCT CONNECTION LOCATION.....	_____	
BLOWER SPEED.....	_____	RPM
MOTOR RATING.....	_____	HP [W]
BRAKE HORSEPOWER.....	_____	BHP
POWER INPUT REQUIREMENT.....	_____	kW

ELECTRICAL DATA

POWER SUPPLY.....	_____	Hz
MINIMUM CIRCUIT AMPACITY.....	_____	AMPS
MAXIMUM OVERCURRENT DEVICE FUSE SIZE.....	_____	AMPS
HACR CIRCUIT BREAKER.....	_____	AMPS

DIMENSIONS & WEIGHT

HEIGHT_____ IN	WIDTH_____ IN	DEPTH_____ IN
TOTAL WEIGHT.....	_____	LBS [kg]
(including factory options)		

CLEARANCES

FRONT	80" [2032 mm]	BACK	18" [457 mm]
BOTTOM	0"	TOP	60" [1524 mm]
LEFT SIDE	18" [457 mm]		36" [914 mm]
RIGHT SIDE (condenser end)			18" [457 mm]

[] Designates Metric Conversions



25 TON MODEL IS OUTSIDE THE SCOPE OF ARI 340/360



**FEATURES FOR PACKAGE AIR CONDITIONERS
RLNL-C/H 15 THRU 25 NOMINAL TONS [52.8 THRU 87.9 kW]**

Cooling

- R410A Refrigerant
- Quiet, Efficient, Scroll Compressors
- Two-Stage Cooling for Superior Comfort Control at Minimum Operating Cost
- Belt-drive Blower with optional drive to accommodate design conditions as high as 2.0 inches [.37 kPa] of external static pressure at nominal airflow
- Copper Tube/Aluminum Fin Coils

Service Features

- 1/4 turn Fasteners and Hinged Access Panels for Convenience
- Large Control Panel with numbered and color coded wiring for Easy Troubleshooting
- Front Access, Slide-Out Blower Assembly for Easy Maintenance
- Convertible Airflow for Maximum Flexibility
- Solid-state microprocessor-based control board provides flexible control and extensive diagnostics for all unit functions
- Features a 16 x 2 character LCD display and a five-button keypad for local configuration and direct diagnosis of the system
- Slide out Condensate Drain pan to simplify Cleaning
- Factory-Installed two-inch [50.8 mm], throw away filters accessible without tools
- Plug-in Electrical Connections on outdoor fan assemblies
- Unit is prewired to accept Slip-In Economizer
- Externally-mounted refrigerant gauge ports

- Side or Base utility access minimizing roof penetrations
- Full perimeter, forkable, riggable baserails with protective forkboards for easy handling
- Complete Factory Tested, Charged, Wired
- Compatible with a third party building management system that supports the BACnet Application Specific Controller device profile
- Compatible with a third party building management system that supports the LonMark Space Comfort Controller (SCC) functional profile or LonMark Discharge Air Controller (DAC) functional profile

Reliability Features

- One-inch [25.4 mm] raised flanges on supply/return opening for superior water management
- Base pan Insulation mounted on bottom helps eliminate corrosion and improves indoor air quality
- Non-Corrosive, sloped drain pan helps improve indoor air quality
- Insulation secured by adhesive *and* mechanical means
- Electrodeposition power-coat paint process guards against extreme weather conditions and withstands 1000-hour salt-spray test
- High and Low Refrigerant Pressure Switches
- Solid core refrigerant liquid line filters
- Available Comfort Alert® Module for power phase monitoring protection
- Models with VFD (Variable Frequency Drive) meet ASHRAE 90.1-2010 and California Title 24.

[] Designates Metric Conversions

ACCESSORIES

Factory Installed

- Oversized Blower motor
- Non-Powered Convenience Outlet
- Low Ambient w/Comfort Alert® Control
- Single Enthalpy Economizer w/Barometric Relief and DDC
- Single Enthalpy Economizer w/Barometric Relief, Smoke Detector and DDC

Field Installed

- Electric Heater Kits
- Non-Powered Convenience Outlet
- Low Ambient Control
- Comfort Alert® Control
- 14" Full Perimeter Roofcurb.....
- Roofcurb Adapter
- Concentric Diffuser
- Manual Outside Air Intake Damper
- Motorized Outside Air Intake Damper
- Motorized Outside Air Intake Damper w/DDC Feedback
- Single Enthalpy Economizer w/Barometric Relief and DDC
- Single Enthalpy Economizer w/Barometric Relief, Smoke Detector and DDC
- Horizontal Single Enthalpy Economizer w/Barometric Relief and DDC
- Dual Enthalpy Adapter
- Power Exhaust.....
- CO₂ Sensor (wall mount with LCD)

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Rheem Sales Company, Inc.
P.O. Box 17010, Fort Smith, AR 72917

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."