



SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

SUBMITTED BY _____ DATE _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						

ACCESSORIES:

NOTES:

SUBMITTAL SHEET FOR PACKAGE AIR CONDITIONERS RACA14- 14 SEER, RACA15- 15 SEER NOMINAL SIZES 3-5 TONS [10.6-17.6 kW]

JOB NAME _____ LOCATION _____
 CONTRACTOR _____ ORDER NO. _____
 ENGINEER _____ UNIT MODEL NO. _____
 SUBMITTED FOR APPROVAL RECORD COIL MODEL NO. _____
 DATE _____ AIR HANDLER MODEL NO. _____

UNIT DIMENSIONS FOR PACKAGE AIR CONDITIONERS 3 TO 5 TON [10.6 TO 17.6 kW] MODELS

UNIT DATA

COOLING PERFORMANCE

TOTAL CAPACITY* MBH
 SENSIBLE CAPACITY* MBH
 OUTDOOR DESIGN TEMP. ... °F [°C] DB/WB
 TOTAL SUPPLY AIR CFM [L/s]
 TEMP. OF AIR ENTERING
 EVAPORATOR COIL °F [°C] DB/WB
 POWER INPUT REQUIREMENT kW
 SEER/EER RATING
 (*uses blower motor heat)

ELECTRIC HEAT PERFORMANCE

ELECTRIC HEAT CAPACITY kW

SUPPLY AIR BLOWER PERFORMANCE

TOTAL SUPPLY AIR CFM [L/s]
 TOTAL RESISTANCE EXTERNAL
 TO UNIT IWG
 BLOWER SPEED RPM
 POWER OUTPUT REQUIREMENT BHP
 MOTOR RATING HP [W]
 POWER INPUT REQUIREMENT kW

ELECTRICAL DATA


POWER SUPPLY / /
 TOTAL UNIT AMPACITY AMPS
 MINIMUM WIRE SIZE AWG
 MAXIMUM OVERCURRENT DEVICE
 FUSES HACR BREAKER AMPS

TOTAL UNIT WEIGHT

TOTAL OPERATING WEIGHT LBS [kg]
 (including field-installed accessories)

CLEARANCES


FRONT	48" [1219 mm]
CONDENSER COIL	18" [457 mm]
DUCT SIDE	12" [305 mm]
EVAPORATOR END	36" [914 mm]
ABOVE UNIT	60" [1524 mm]

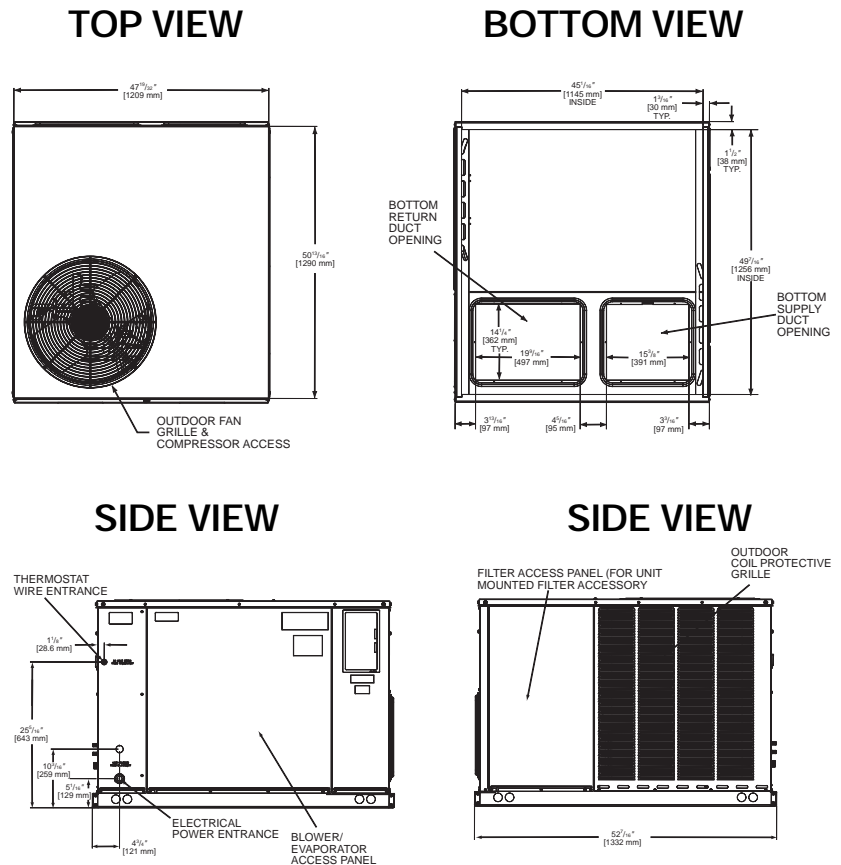


[] Designates Metric Conversions



FRONT VIEW

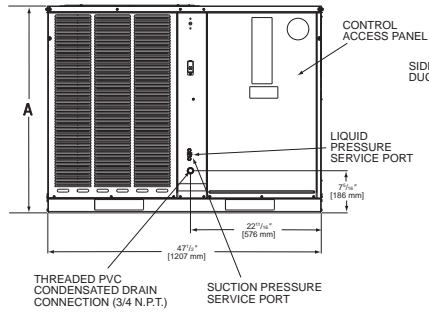

REAR VIEW

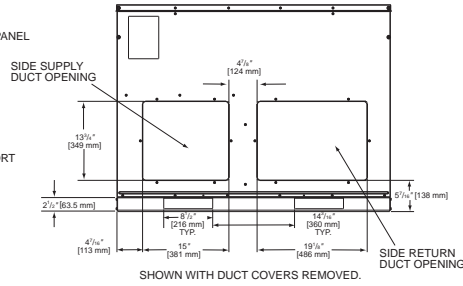

Model #	Height "A"
024, 030, 036, 042	35 ¹⁵ / ₁₆
048, 060	41

IMPORTANT:
Unit must be level to
prevent water migration.

[] Designates Metric Conversions

FEATURES

- All models feature Scroll® compressors for maximum efficiency and quiet operation. The 5-Ton RACA15 model features Scroll UltraTech™ 2-Stage compressors with Comfort Alert™ diagnostics (see below), high/low pressure switches, and hard start kit.
- Louvered condenser compartment to protect the coil against yard hazards and/or weather extremes.
- One-piece top with a drip lip to help keep water off of the unit sides.
- Drawn supply and return air openings feature a one-inch tall flange to prevent water migration into the ductwork.
- Access panels have "weep holes" and channels to further help manage water run-off.
- Side and down discharge options available on all models.
- Easily accessible blower section complete with slide-out blower.
- Externally mounted refrigerant connections are conveniently located for easy service diagnostics.
- Micro Channel evaporator and condenser delivers superior performance with less refrigerant charge and less weight than conventional copper tube/aluminum fin coils. In addition the all aluminum construction has superior protection against formicary corrosion and aluminum tube rubbing potential. Its easier to clean and has a more robust surface.
- Supplemental electric heat strips up to 15 kW are available (field or factory installed) for periods of extreme cold temperatures. Single point wiring simplifies installation.
- All units feature an internal trap on the condensate line eliminating the need for installing an on-site external trap.
- Easily accessible control box.
- Thermal expansion valve standard on all models for superior superheat control, reliability, and energy efficiency at all operating conditions.
- Solid core liquid line. Filter drier standard on all models (not shown).
- Rugged baserail included for improved installation and handling.
- Molded compressor plug.
- Complete factory charged, wired and run tested.
- A double sloped evaporator coil drain pan assures all water is removed from the unit to improve indoor air quality.

ACCESSORIES

Economizers

- Sideflow Only
- Downflow Only

Fresh Air Dampers

- Manual
- Motorized

- Supply & Return Diffusers
- Filter Kit

- Roofcurbs
- Low Ambient Control
- Rectangular to Round Transition
- Roofcurb Adaptors
- High Pressure Control
- Low Pressure Control

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.