



MODEL: RSPM Package Air Conditioners

FORM NO. SSC-950 REV. 1

Sure Comfort® RSPM Package Air Conditioners




RSPM- 14-SEER

- Nominal Sizes 2-5 Tons [7-17.6 kW]



Table of Contents


Unit Features & Benefits.....	3-6
Model Identification Options	7
General Data	
RSPM-	8-10
Performance Data	
RSPM- Cooling	11-14
Indoor Airflow Performance	
RSPM-	15-18
Electrical Data	
RSPM-	19
Electric Heater Kits	
RSPM-	20-21
Dimensional Data	22-23
Accessories	24
Typical Wiring	25-30
Limited Warranty	31

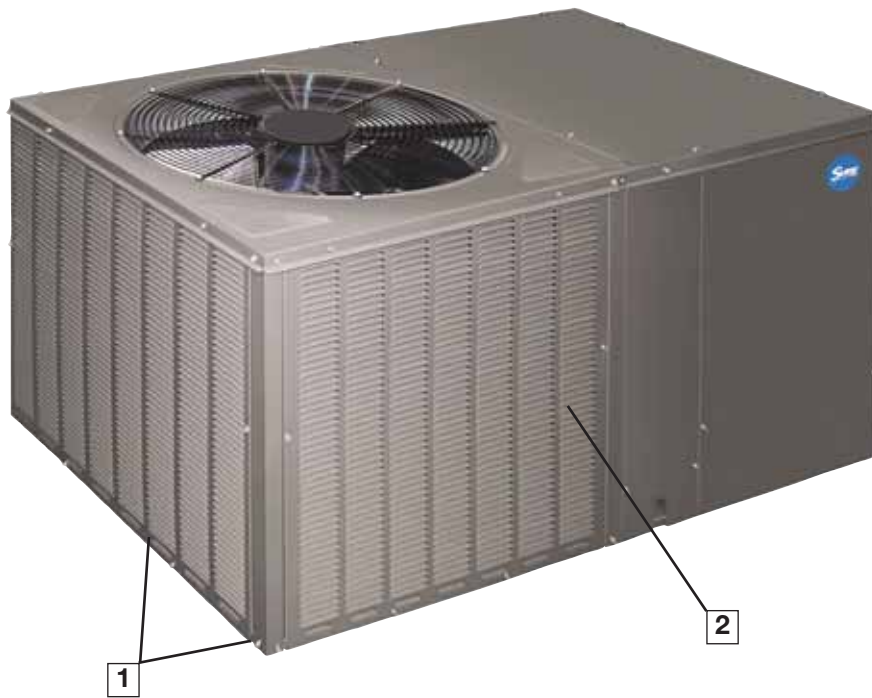

The RSPM of Package Air Conditioners are designed to be the most efficient, quickest to install, easiest to service, and most reliable units in the industry - while still maintaining an affordable price. This platform provides you with a full line of nominal capacities from 2 through 5 tons utilizing earth-friendly R-410A refrigerant. This unit is suitable for use in mobile homes, manufactured housing and conventionally constructed residential and commercial buildings where horizontally-ducted systems are preferred. RSPM Models are 14 SEER and AHRI-certified.

Starting at the bottom, the base rails (1) allow for separation between the unit base and the ground level, protecting the base from ground moisture and providing air circulation around the unit. Constructed from sturdy 14-gauge G-90 sheet metal, the base rails also allow for easier maneuverability during installation.

As with all units offered by Sure Comfort, we started our design process with input from the customer. From fan grille to the base rails, Sure Comfort has combined 30 years worth of package unit design experience with input from Dealers to meet the latest application requirements.

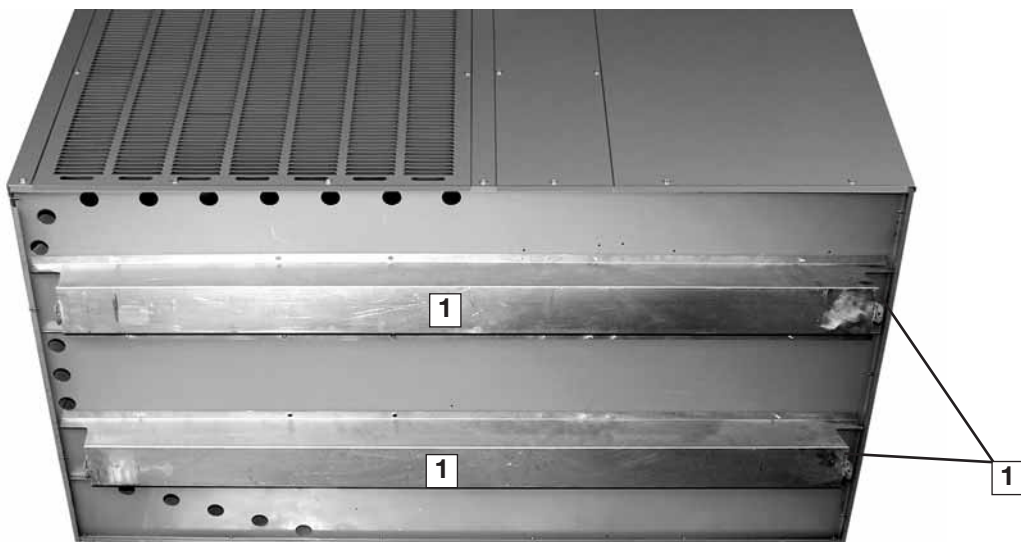



To provide flexibility in space-limited installations, the unit can be installed flush to the structure without blocking airflow over the outdoor coil or making any screws inaccessible for maintenance. Furthermore, the cabinet is a slim 33" wide. Full-louver coil protection ([2]) makes Sure Comfort unique in the industry and also totally protects the outdoor coil from vandalism and weather extremes.

Two round 14" duct collar ([3]) are included with the unit, which makes attaching duct a snap. The collar is crimped around the leading edge, making it easier to install duct onto the collar. A metal bead around the circumference prevents the attached ducting from sliding off after installation.

Keeping service technicians in mind, Sure Comfort takes pride providing easy access to internal components. The outdoor-section top cover ([4]) is easily removed to allow access to the scroll compressor ([5]), outdoor fan motor ([6]), and refrigerant tubing ([7]).







The indoor-section top cover also easily opens to access the removable blower housing and motor (8). This also gains total access to the indoor coil for cleaning and service (9).

The indoor motor and blower system will achieve nominal 400 CFM per ton up to a minimum of .8 inches of static pressure, which helps to eliminate customer dissatisfaction over poor airflow brought about by high-static duct designs.

Optional electric heat (10) can be specified as factory installed, or can be easily installed in the field, with either dual- or single-point power connections.

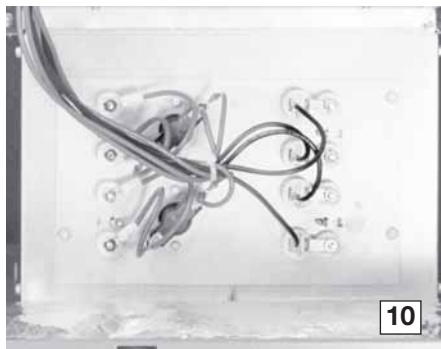


The controls are located in a large, easy-to-access control box (11), which provides plenty of space in which to troubleshoot. The transformer (12) is protected by an in-line fuse, which protects the transformer during a low-voltage electrical short. The low-voltage (13) and high-voltage (14) wiring connections are easily accessed and have ample room around which to maneuver. Troubleshooting is further aided with number- and color-coded wiring, which corresponds with the large, easy-to-read wiring diagram located on the inside of the control box access panel.

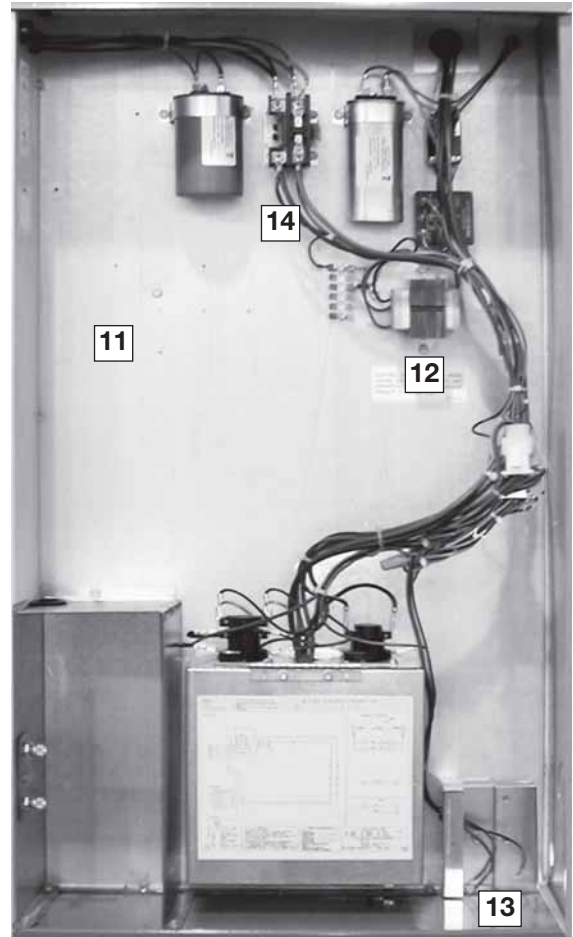

Sure Comfort® RSPM Package Air Conditioners

High and low refrigerant pressure can easily and accurately be measured using the two gauge ports (15) located inside the control box.



Foil-faced insulation is securely glued and captured to the cabinet. On the base of the unit, closed-cell insulation is used to prevent moisture from being absorbed and help reduce mold content to provide better indoor air quality.

For reliability and long-lasting operation, Sure Comfort uses 100% scroll compressor technology (18) on all package platforms. With over 12 years of history, the scroll compressor has proven to be reliable, efficient, and quiet during operation.




A small side panel grants access to a removable, sloped drain pan (16), which helps to ensure indoor air quality (IAQ) throughout the life of the unit.

A 3/4" drain trap (17) assembly is provided for convenience.

“Patent 7,430,877”



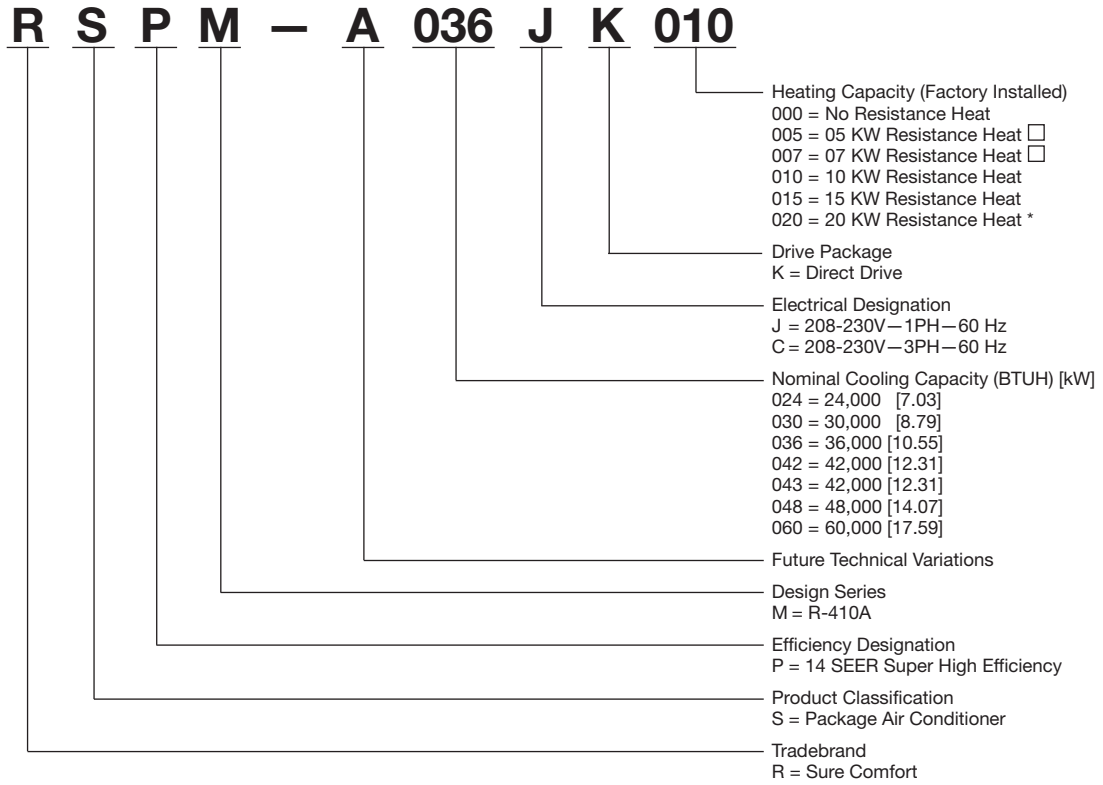

Not available in 3 phase models.
 *Available in 3½, 4 and 5 ton models.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TON [7-17.6 kW]

Model RSPM-	A024JK	A030JK	A036CK	A036JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	25,200 [7.38]	30,400 [8.91]	37,600 [11.02]	37,600 [11.02]
EER/SEER ²	12.4/14	12.25/14	12.2/14	12.2/14
Nominal CFM/AHRI Rated CFM [L/s]	800/800 [378/378]	1000/1000 [472/472]	1200/1200 [566/566]	1200/1200 [566/566]
AHRI Net Cooling Capacity Btu [kW]	24,200 [7.09]	29,200 [8.56]	36,200 [10.61]	36,200 [10.61]
Net Sensible Capacity Btu [kW]	18,800 [5.51]	23,000 [6.74]	27,700 [8.12]	27,700 [8.12]
Net Latent Capacity Btu [kW]	5,400 [1.58]	6,200 [1.82]	8,500 [2.49]	8,500 [2.49]
Net System Power kW	1.95	2.38	2.97	2.97
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	10.44 [0.97]	12.64 [1.17]	12.65 [1.18]	12.65 [1.18]
Rows / FPI [FPcm]	1 / 20 [8]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	4.33 [0.4]	4.33 [0.4]	4.33 [0.4]	4.33 [0.4]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3400 [1604]	3400 [1604]	3400 [1604]	3400 [1604]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	875	875	875	875
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	1/4	1/3	1/2	1/2
Motor RPM (Nominal)	1050	1050	1050	1050
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x20x16 [25x508x406]	(1)1x20x20 [25x508x508]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)	70 [1984]	78 [2211]	78 [2211]	78 [2211]
Weights				
Net Weight lbs. [kg]	304 [138]	306 [139]	309 [140]	309 [140]
Ship Weight lbs. [kg]	328 [149]	330 [150]	333 [151]	333 [151]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.

NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RSPM-	A042CK	A042JK	A043CK	A043JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	43,500 [12.75]	43,500 [12.75]	43,000 [12.6]	43,000 [12.6]
EER/SEER ²	11.85/14	11.85/14	12/14	12/14
Nominal CFM/AHRI Rated CFM [L/s]	1400/1400 [661/661]	1400/1400 [661/661]	1400/1400 [661/661]	1400/1400 [661/661]
AHRI Net Cooling Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]	42,000 [12.31]
Net Sensible Capacity Btu [kW]	32,500 [9.52]	32,500 [9.52]	32,000 [9.38]	32,000 [9.38]
Net Latent Capacity Btu [kW]	9,500 [2.78]	9,500 [2.78]	10,000 [2.93]	10,000 [2.93]
Net System Power kW	3.53	3.53	3.5	3.5
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	12.65 [1.18]	12.65 [1.18]	12.65 [1.18]	12.65 [1.18]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]	3 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3400 [1604]	3400 [1604]	3400 [1604]	3400 [1604]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	875	875	850	850
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279x229]	1/11x9 [279x229]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	1/2	1/2	1/2	1/2
Motor RPM (Nominal)	1050	1050	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)	86 [2438]	86 [2438]	86 [2438]	86 [2438]
Weights				
Net Weight lbs. [kg]	333 [151]	333 [151]	333 [151]	333 [151]
Ship Weight lbs. [kg]	357 [162]	357 [162]	357 [162]	357 [162]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.

NOMINAL SIZES 2-5 TONS [7-17.6 kW]

Model RSPM-	A048CK	A048JK	A060CK	A060JK
Cooling Performance¹				
Gross Cooling Capacity Btu [kW]	49,000 [14.36]	49,000 [14.36]	64,000 [18.75]	64,000 [18.75]
EER/SEER ²	12.6/14	12.6/14	12.35/14	12.35/14
Nominal CFM/AHRI Rated CFM [L/s]	1600/1600 [755/755]	1600/1600 [755/755]	2000/1900 [944/897]	2000/1900 [944/897]
AHRI Net Cooling Capacity Btu [kW]	47,000 [13.77]	47,000 [13.77]	61,000 [17.87]	61,000 [17.87]
Net Sensible Capacity Btu [kW]	36,400 [10.67]	36,400 [10.67]	45,500 [13.33]	45,500 [13.33]
Net Latent Capacity Btu [kW]	10,600 [3.11]	10,600 [3.11]	15,500 [4.54]	15,500 [4.54]
Net System Power kW	3.61	3.61	4.94	4.94
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³				
	78	78	78	78
Outdoor Coil—Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
Tube Size in. [mm] OD	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.54 [1.54]	16.54 [1.54]	16.54 [1.54]	16.54 [1.54]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]	5.78 [0.54]
Rows / FPI [FPcm]	3 / 13 [5]	3 / 13 [5]	4 / 13 [5]	4 / 13 [5]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm] ⁴	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]	1/1 [25.4]
Outdoor Fan—Type				
Propeller	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]	1/24 [609.6]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	4200 [1982]	4200 [1982]	4000 [1888]	4000 [1888]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type				
FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]	1/11x9 [279.4x228.6]
Drive Type/No. Speeds	Direct/2	Direct/2	Direct/2	Direct/2
No. Motors	1	1	1	1
Motor HP	3/4	3/4	3/4	3/4
Motor RPM (Nominal)	1050	1050	1050	1050
Motor Frame Size	48	48	48	48
Filter—Type				
Field Supplied	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g] (R-410A)				
	114 [3232]	114 [3232]	178 [5046]	178 [5046]
Weights				
Net Weight lbs. [kg]	349 [158]	349 [158]	364 [165]	364 [165]
Ship Weight lbs. [kg]	375 [170]	375 [170]	390 [177]	390 [177]

[] Designates Metric Conversions

NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. AHRI capacity is net and includes the effect of fan motor heat. Units are suitable for operation to ±20% of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 210/240 or 360.
2. EER and/or SEER are rated at AHRI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.
4. Standard 3/4" PVC P-Trap provided.

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A024

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		960 [453]	800 [378]	640 [302]	960 [453]	800 [378]	640 [302]	960 [453]	800 [378]	640 [302]	
DR ①		.10	.06	.01	.10	.06	.01	.10	.06	.01	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	30.9 [9.06] 19.4 [5.69] 1.4	29.8 [8.73] 17.8 [5.22] 1.3	28.7 [8.41] 16.1 [4.72] 1.3	29.0 [8.50] 22.9 [6.71] 1.4	28.0 [8.21] 20.9 [6.13] 1.3	26.9 [7.88] 19.0 [5.57] 1.3	27.3 [8.00] 26.3 [7.71] 1.4	26.4 [7.74] 24.0 [7.03] 1.3	25.4 [7.44] 21.8 [6.39] 1.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	30.2 [8.85] 19.1 [5.60] 1.4	29.2 [8.56] 17.5 [5.13] 1.4	28.1 [8.24] 15.9 [4.66] 1.4	28.3 [8.29] 22.6 [6.62] 1.4	27.3 [8.00] 20.7 [6.07] 1.4	26.3 [7.71] 18.7 [5.48] 1.4	26.7 [7.83] 26.0 [7.62] 1.4	25.7 [7.53] 23.7 [6.95] 1.4	24.8 [7.27] 21.5 [6.30] 1.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	29.5 [8.65] 18.8 [5.51] 1.5	28.5 [8.35] 17.2 [5.04] 1.5	27.4 [8.03] 15.6 [4.57] 1.5	27.6 [8.09] 22.3 [6.54] 1.5	26.6 [7.80] 20.4 [5.98] 1.5	25.7 [7.53] 18.5 [5.42] 1.5	26.0 [7.62] 25.6 [7.50] 1.5	25.1 [7.36] 23.5 [6.89] 1.5	24.1 [7.06] 21.3 [6.24] 1.5
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	28.8 [8.44] 18.5 [5.42] 1.6	27.7 [8.12] 16.9 [4.95] 1.6	26.7 [7.83] 15.3 [4.48] 1.6	26.8 [7.85] 21.9 [6.42] 1.6	25.9 [7.59] 20.1 [5.89] 1.6	25.0 [7.33] 18.2 [5.33] 1.6	25.2 [7.39] 25.2 [7.39] 1.6	24.3 [7.12] 23.1 [6.77] 1.6	23.4 [6.86] 21.0 [6.15] 1.6
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	27.9 [8.18] 18.1 [5.30] 1.7	27.0 [7.91] 16.6 [4.86] 1.7	26.0 [7.62] 15.0 [4.40] 1.7	26.0 [7.62] 21.6 [6.33] 1.7	25.1 [7.36] 19.7 [5.77] 1.7	24.2 [7.09] 17.9 [5.25] 1.7	24.4 [7.15] 24.4 [7.15] 1.7	23.5 [6.89] 22.9 [6.71] 1.7	22.7 [6.65] 20.7 [6.07] 1.7
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	27.1 [7.94] 17.7 [5.19] 1.8	26.1 [7.65] 16.2 [4.75] 1.8	25.2 [7.39] 14.7 [4.31] 1.7	25.2 [7.39] 21.1 [6.18] 1.8	24.3 [7.12] 19.3 [5.66] 1.8	23.4 [6.86] 17.5 [5.13] 1.7	23.5 [6.89] 23.5 [6.89] 1.8	22.7 [6.65] 22.4 [6.56] 1.8	21.9 [6.42] 20.3 [5.95] 1.7
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	26.1 [7.65] 17.2 [5.04] 1.9	25.2 [7.39] 15.7 [4.60] 1.9	24.3 [7.12] 14.3 [4.19] 1.8	24.2 [7.09] 20.7 [6.07] 1.9	23.4 [6.86] 18.9 [5.54] 1.9	22.5 [6.59] 17.2 [5.04] 1.9	22.6 [6.62] 22.6 [6.62] 1.9	21.8 [6.39] 21.8 [6.39] 1.9	21.0 [6.15] 19.9 [5.83] 1.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	25.1 [7.36] 16.7 [4.89] 2.0	24.2 [7.09] 15.3 [4.48] 1.9	23.4 [6.86] 13.8 [4.04] 1.9	23.2 [6.80] 20.2 [5.92] 2.0	22.4 [6.56] 18.4 [5.39] 1.9	21.6 [6.33] 16.7 [4.89] 1.9	21.6 [6.33] 21.6 [6.33] 2.0	20.8 [6.10] 20.8 [6.10] 1.9	20.1 [5.89] 19.5 [5.71] 1.9
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	24.0 [7.03] 16.1 [4.72] 2.1	23.2 [6.80] 14.7 [4.31] 2.0	22.3 [6.54] 13.3 [3.90] 2.0	22.1 [6.48] 19.6 [5.74] 2.1	21.4 [6.27] 17.9 [5.25] 2.0	20.6 [6.04] 16.2 [4.75] 2.0	20.5 [6.01] 20.5 [6.01] 2.1	19.8 [5.80] 19.8 [5.80] 2.0	19.1 [5.60] 19.0 [5.57] 2.0

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A030

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1200 [566]	1000 [472]	800 [378]	1200 [566]	1000 [472]	800 [378]	1200 [566]	1000 [472]	800 [378]	
DR ①		.11	.07	.02	.11	.07	.02	.11	.07	.02	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	37.8 [11.08] 23.5 [6.89] 1.7	36.5 [10.70] 21.5 [6.30] 1.6	35.1 [10.29] 19.5 [5.71] 1.6	35.0 [10.26] 27.8 [8.15] 1.7	33.8 [9.91] 25.4 [7.44] 1.6	32.6 [9.55] 23.1 [6.77] 1.6	33.1 [9.70] 31.0 [9.09] 1.7	31.9 [9.35] 28.4 [8.32] 1.6	30.7 [9.00] 25.8 [7.56] 1.6
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	37.2 [10.90] 23.3 [6.83] 1.8	35.9 [10.52] 21.3 [6.24] 1.7	34.6 [10.14] 19.3 [5.66] 1.7	34.4 [10.08] 27.7 [8.12] 1.8	33.2 [9.73] 25.3 [7.41] 1.7	32.0 [9.38] 22.9 [6.71] 1.7	32.5 [9.52] 31.0 [9.09] 1.8	31.4 [9.20] 28.3 [8.29] 1.7	30.2 [8.85] 25.6 [7.50] 1.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	36.4 [10.67] 23.0 [6.74] 1.9	35.1 [10.29] 21.0 [6.15] 1.8	33.8 [9.91] 19.1 [5.60] 1.8	33.6 [9.85] 27.3 [8.00] 1.9	32.4 [9.50] 25.0 [7.33] 1.8	31.2 [9.14] 22.7 [6.65] 1.8	31.7 [9.29] 30.7 [9.00] 1.9	30.6 [8.97] 28.0 [8.21] 1.8	29.4 [8.62] 25.4 [7.44] 1.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	35.3 [10.35] 22.5 [6.59] 2.0	34.1 [9.99] 20.6 [6.04] 2.0	32.9 [9.64] 18.7 [5.48] 1.9	32.6 [9.55] 26.9 [7.88] 2.0	31.4 [9.20] 24.6 [7.21] 2.0	30.3 [8.88] 22.3 [6.54] 1.9	30.6 [8.97] 30.1 [8.82] 2.0	29.6 [8.67] 27.6 [8.09] 2.0	28.5 [8.35] 25.0 [7.33] 1.9
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	34.2 [10.02] 22.0 [6.45] 2.1	33.0 [9.67] 20.1 [5.89] 2.1	31.8 [9.32] 18.2 [5.33] 2.0	31.4 [9.20] 26.4 [7.74] 2.1	30.3 [8.88] 24.1 [7.06] 2.1	29.2 [8.56] 21.9 [6.42] 2.0	29.5 [8.65] 29.5 [8.65] 2.1	28.4 [8.32] 27.1 [7.94] 2.1	27.4 [8.03] 24.5 [7.18] 2.0
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	33.0 [9.67] 21.4 [6.27] 2.2	31.8 [9.32] 19.6 [5.74] 2.2	30.7 [9.00] 17.8 [5.22] 2.1	30.2 [8.85] 25.8 [7.56] 2.2	29.1 [8.53] 23.6 [6.92] 2.2	28.1 [8.24] 21.4 [6.27] 2.1	28.3 [8.29] 28.3 [8.29] 2.2	27.3 [8.00] 26.5 [7.77] 2.2	26.3 [7.71] 24.1 [7.06] 2.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	31.8 [9.32] 20.8 [6.10] 2.3	30.7 [9.00] 19.1 [5.60] 2.3	29.6 [8.67] 17.3 [5.07] 2.2	29.0 [8.50] 25.2 [7.39] 2.3	28.0 [8.21] 23.0 [6.74] 2.3	27.0 [7.91] 20.9 [6.13] 2.3	27.1 [7.94] 27.1 [7.94] 2.3	26.1 [7.65] 26.0 [7.62] 2.3	25.2 [7.39] 23.6 [6.92] 2.2
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	30.7 [9.00] 20.3 [5.95] 2.4	29.7 [8.70] 18.6 [5.45] 2.4	28.6 [8.38] 16.8 [4.92] 2.3	28.0 [8.21] 24.6 [7.21] 2.4	27.0 [7.91] 22.5 [6.59] 2.4	26.0 [7.62] 20.4 [5.98] 2.3	26.0 [7.62] 26.0 [7.62] 2.4	25.1 [7.36] 25.1 [7.36] 2.4	24.2 [7.09] 23.1 [6.77] 2.3
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	29.8 [8.73] 19.8 [5.80] 2.5	28.8 [8.44] 18.1 [5.30] 2.5	27.8 [8.15] 16.4 [4.81] 2.4	27.1 [7.94] 24.2 [7.09] 2.5	26.1 [7.65] 22.1 [6.48] 2.5	25.2 [7.39] 20.0 [5.86] 2.4	25.1 [7.36] 25.1 [7.36] 2.5	24.3 [7.12] 24.3 [7.12] 2.5	23.4 [6.86] 22.7 [6.65] 2.4

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A036

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1440 [680]	1200 [566]	960 [453]	1440 [680]	1200 [566]	960 [453]	1440 [680]	1200 [566]	960 [453]	
DR ①		.12	.09	.04	.12	.09	.04	.12	.09	.04	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	34.5 [10.11] 21.1 [6.18] 2.1	33.3 [9.76] 19.3 [5.66] 2.0	32.0 [9.38] 17.5 [5.13] 2.0	31.6 [9.26] 26.6 [7.80] 2.1	30.5 [8.94] 24.3 [7.12] 2.0	29.4 [8.62] 22.1 [6.48] 2.0	29.1 [8.53] 29.1 [8.53] 2.0	28.1 [8.24] 28.1 [8.24] 2.0	27.1 [7.94] 26.1 [7.65] 2.0
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	43.1 [12.63] 26.6 [7.80] 2.2	41.6 [12.19] 24.3 [7.12] 2.2	40.1 [11.75] 22.0 [6.45] 2.1	40.3 [11.81] 32.1 [9.41] 2.2	38.9 [11.40] 29.3 [8.59] 2.2	37.5 [10.99] 26.6 [7.80] 2.1	37.8 [11.08] 37.8 [11.08] 2.2	36.4 [10.67] 36.4 [10.67] 2.1	35.1 [10.29] 30.6 [8.97] 2.1
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	46.1 [13.51] 28.6 [8.38] 2.3	44.5 [13.04] 26.2 [7.68] 2.3	42.9 [12.57] 23.7 [6.95] 2.3	43.3 [12.69] 34.1 [9.99] 2.3	41.8 [12.25] 31.2 [9.14] 2.3	40.3 [11.81] 28.3 [8.29] 2.3	40.8 [11.96] 40.8 [11.96] 2.3	39.4 [11.55] 39.4 [11.55] 2.3	37.9 [11.11] 32.3 [9.47] 2.2
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	45.1 [13.22] 28.2 [8.26] 2.5	43.6 [12.78] 25.8 [7.56] 2.4	42.0 [12.31] 23.4 [6.86] 2.4	42.3 [12.40] 33.7 [9.88] 2.5	40.8 [11.96] 30.8 [9.03] 2.4	39.4 [11.55] 27.9 [8.18] 2.4	39.8 [11.66] 39.8 [11.66] 2.5	38.4 [11.25] 38.4 [11.25] 2.4	37.0 [10.84] 31.9 [9.35] 2.4
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	41.7 [12.22] 26.3 [7.71] 2.6	40.3 [11.81] 24.0 [7.03] 2.6	38.8 [11.37] 21.8 [6.39] 2.5	38.9 [11.40] 31.8 [9.32] 2.6	37.6 [11.02] 29.1 [8.53] 2.6	36.2 [10.61] 26.4 [7.74] 2.5	36.4 [10.67] 36.4 [10.67] 2.6	35.1 [10.29] 35.1 [10.29] 2.5	33.8 [9.91] 30.4 [8.91] 2.5
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	37.6 [11.02] 23.9 [7.00] 2.8	36.3 [10.64] 21.9 [6.42] 2.7	34.9 [10.23] 19.8 [5.80] 2.7	34.8 [10.20] 29.4 [8.62] 2.7	33.5 [9.82] 26.9 [7.88] 2.7	32.3 [9.47] 24.4 [7.15] 2.7	32.2 [9.44] 32.2 [9.44] 2.7	31.1 [9.11] 31.1 [9.11] 2.7	30.0 [8.79] 28.4 [8.32] 2.6
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	34.3 [10.05] 22.1 [6.48] 2.9	33.1 [9.70] 20.2 [5.92] 2.8	31.9 [9.35] 18.3 [5.36] 2.8	31.5 [9.23] 27.6 [8.09] 2.9	30.4 [8.91] 25.2 [7.39] 2.8	29.3 [8.59] 22.9 [6.71] 2.8	28.9 [8.47] 28.9 [8.47] 2.9	27.9 [8.18] 27.9 [8.18] 2.8	26.9 [7.88] 26.9 [7.88] 2.8
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	33.5 [9.82] 21.8 [6.39] 3.0	32.3 [9.47] 19.9 [5.83] 3.0	31.1 [9.11] 18.0 [5.28] 2.9	30.7 [9.00] 27.3 [8.00] 3.0	29.6 [8.67] 24.9 [7.30] 3.0	28.5 [8.35] 22.6 [6.62] 2.9	28.1 [8.24] 28.1 [8.24] 3.0	27.1 [7.94] 27.1 [7.94] 3.0	26.1 [7.65] 26.1 [7.65] 2.9
115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	36.8 [10.79] 23.9 [7.00] 3.2	35.5 [10.40] 21.9 [6.42] 3.1	34.2 [10.02] 19.9 [5.83] 3.1	34.0 [9.96] 29.4 [8.62] 3.2	32.8 [9.61] 26.9 [7.88] 3.1	31.6 [9.26] 24.4 [7.15] 3.1	31.4 [9.20] 31.4 [9.20] 3.1	30.3 [8.88] 30.3 [8.88] 3.1	29.2 [8.56] 29.2 [8.56] 3.0	

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A042

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	
DR ①		.11	.07	.03	.11	.07	.03	.11	.07	.03	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	54.2 [15.88] 34.3 [10.05] 2.4	52.3 [15.33] 31.3 [9.17] 2.3	50.4 [14.77] 28.4 [8.32] 2.3	51.1 [14.98] 40.5 [11.87] 2.4	49.3 [14.45] 37.1 [10.87] 2.3	47.5 [13.92] 33.6 [9.85] 2.3	48.6 [14.24] 46.7 [13.69] 2.3	46.9 [13.75] 42.7 [12.51] 2.3	45.2 [13.25] 38.7 [11.34] 2.3
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	52.6 [15.42] 33.3 [9.76] 2.6	50.7 [14.86] 30.4 [8.91] 2.5	48.9 [14.33] 27.6 [8.09] 2.5	49.5 [14.51] 39.5 [11.58] 2.5	47.8 [14.01] 36.2 [10.61] 2.5	46.1 [13.51] 32.8 [9.61] 2.5	47.0 [13.77] 45.8 [13.42] 2.5	45.3 [13.28] 41.8 [12.25] 2.5	43.7 [12.81] 37.9 [11.11] 2.4
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	51.1 [14.98] 32.4 [9.50] 2.7	49.3 [14.45] 29.7 [8.70] 2.7	47.5 [13.92] 26.9 [7.88] 2.7	48.0 [14.07] 38.7 [11.34] 2.7	46.4 [13.60] 35.4 [10.37] 2.7	44.7 [13.10] 32.1 [9.41] 2.6	45.5 [13.33] 44.9 [13.16] 2.7	43.9 [12.87] 41.0 [12.02] 2.7	42.3 [12.40] 37.2 [10.90] 2.6
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	49.7 [14.57] 31.7 [9.29] 2.9	47.9 [14.04] 29.0 [8.50] 2.9	46.2 [13.54] 26.3 [7.71] 2.8	46.6 [13.66] 38.0 [11.14] 2.9	45.0 [13.19] 34.7 [10.17] 2.9	43.3 [12.69] 31.5 [9.23] 2.8	44.1 [12.92] 44.1 [12.92] 2.9	42.5 [12.46] 40.4 [11.84] 2.8	41.0 [12.02] 36.6 [10.73] 2.8
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	48.3 [14.16] 31.1 [9.11] 3.1	46.6 [13.66] 28.4 [8.32] 3.1	44.9 [13.16] 25.8 [7.56] 3.0	45.2 [13.25] 37.3 [10.93] 3.1	43.6 [12.78] 34.1 [9.99] 3.0	42.1 [12.34] 31.0 [9.09] 3.0	42.7 [12.51] 42.7 [12.51] 3.1	41.2 [12.07] 39.9 [11.69] 3.0	39.7 [11.63] 36.1 [10.58] 3.0
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	46.9 [13.75] 30.4 [8.91] 3.3	45.2 [13.25] 27.8 [8.15] 3.2	43.6 [12.78] 25.2 [7.39] 3.2	43.8 [12.84] 36.7 [10.76] 3.3	42.3 [12.40] 33.6 [9.85] 3.2	40.8 [11.96] 30.4 [8.91] 3.2	41.3 [12.10] 41.3 [12.10] 3.3	39.8 [11.66] 39.2 [11.49] 3.2	38.4 [11.25] 35.6 [10.43] 3.1
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	45.4 [13.31] 29.8 [8.73] 3.5	43.8 [12.84] 27.3 [8.00] 3.4	42.2 [12.37] 24.7 [7.24] 3.4	42.4 [12.43] 36.1 [10.58] 3.5	40.9 [11.99] 33.0 [9.67] 3.4	39.4 [11.55] 29.9 [8.76] 3.4	39.8 [11.66] 39.8 [11.66] 3.4	38.4 [11.25] 38.4 [11.25] 3.4	37.0 [10.84] 35.1 [10.29] 3.3
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	43.9 [12.87] 29.2 [8.56] 3.7	42.4 [12.43] 26.7 [7.83] 3.6	40.8 [11.96] 24.2 [7.09] 3.5	40.9 [11.99] 35.4 [10.37] 3.7	39.4 [11.55] 32.4 [9.50] 3.6	38.0 [11.14] 29.4 [8.62] 3.5	38.3 [11.22] 38.3 [11.22] 3.6	37.0 [10.84] 37.0 [10.84] 3.6	35.6 [10.43] 34.5 [10.11] 3.5
115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	42.3 [12.40] 28.5 [8.35] 3.8	40.8 [11.96] 26.0 [7.62] 3.8	39.3 [11.52] 23.6 [6.92] 3.7	39.3 [11.52] 34.7 [10.17] 3.8	37.9 [11.11] 31.8 [9.32] 3.8	36.5 [10.70] 28.8 [8.44] 3.7	36.7 [10.76] 36.7 [10.76] 3.8	35.4 [10.37] 35.4 [10.37] 3.7	34.1 [9.99] 33.9 [9.94] 3.7	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A043CK

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	51.7 [15.2] 31.5 [9.2] 2.6	49.9 [14.6] 27.0 [7.9] 2.6	48.1 [14.1] 22.8 [6.7] 2.5	49.5 [14.5] 39.5 [11.6] 2.6	47.7 [14.0] 34.3 [10.1] 2.6	46.0 [13.5] 29.6 [8.7] 2.5	46.4 [13.6] 43.4 [12.7] 2.6	44.8 [13.1] 38.1 [11.2] 2.5	43.2 [12.7] 33.1 [9.7] 2.5
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.6 [14.8] 31.3 [9.2] 2.8	48.8 [14.3] 26.8 [7.9] 2.7	47.0 [13.8] 22.7 [6.7] 2.7	48.4 [14.2] 39.3 [11.5] 2.8	46.7 [13.7] 34.2 [10.0] 2.7	45.0 [13.2] 29.5 [8.7] 2.7	45.4 [13.3] 43.3 [12.7] 2.7	43.8 [12.8] 38.0 [11.1] 2.7	42.2 [12.4] 33.0 [9.7] 2.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	49.4 [14.5] 30.9 [9.1] 3.0	47.7 [14.0] 26.6 [7.8] 2.9	45.9 [13.5] 22.5 [6.6] 2.9	47.2 [13.8] 38.9 [11.4] 2.9	45.5 [13.3] 33.9 [9.9] 2.9	43.9 [12.9] 29.3 [8.6] 2.8	44.2 [13.0] 43.0 [12.6] 2.9	42.6 [12.5] 37.7 [11.1] 2.9	41.1 [12.0] 32.8 [9.6] 2.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	48.1 [14.1] 30.4 [8.9] 3.1	46.4 [13.6] 26.1 [7.7] 3.1	44.7 [13.1] 22.1 [6.5] 3.0	45.9 [13.5] 38.4 [11.3] 3.1	44.2 [13.0] 33.4 [9.8] 3.1	42.6 [12.5] 28.8 [8.5] 3.0	42.8 [12.5] 42.3 [12.4] 3.1	41.3 [12.1] 37.2 [10.9] 3.0	39.8 [11.7] 32.4 [9.5] 3.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	46.6 [13.7] 29.6 [8.7] 3.3	45.0 [13.2] 25.5 [7.5] 3.3	43.3 [12.7] 21.6 [6.3] 3.2	44.4 [13.0] 37.6 [11.0] 3.3	42.8 [12.5] 32.8 [9.6] 3.3	41.3 [12.1] 28.4 [8.3] 3.2	41.4 [12.1] 41.4 [12.1] 3.3	39.9 [11.7] 36.6 [10.7] 3.2	38.5 [11.3] 31.9 [9.4] 3.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.0 [13.2] 28.8 [8.5] 3.5	43.5 [12.7] 24.8 [7.3] 3.5	41.9 [12.3] 21.0 [6.2] 3.4	42.8 [12.5] 36.7 [10.8] 3.5	41.3 [12.1] 32.1 [9.4] 3.4	39.8 [11.7] 27.7 [8.1] 3.4	39.8 [11.7] 39.8 [11.7] 3.5	38.4 [11.3] 35.9 [10.5] 3.4	37.0 [10.8] 31.3 [9.2] 3.4
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	43.4 [12.7] 27.9 [8.2] 3.7	41.8 [12.3] 23.9 [7.0] 3.7	40.3 [11.8] 20.3 [6.0] 3.6	41.1 [12.0] 35.6 [10.4] 3.7	39.7 [11.6] 31.2 [9.2] 3.7	38.3 [11.2] 27.0 [7.9] 3.6	38.1 [11.2] 38.1 [11.2] 3.7	36.8 [10.8] 35.0 [10.3] 3.6	35.4 [10.4] 30.5 [8.9] 3.6
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	41.5 [12.2] 26.6 [7.8] 4.0	40.1 [11.8] 22.9 [6.7] 3.9	38.6 [11.3] 19.4 [5.7] 3.8	39.3 [11.5] 34.4 [10.1] 3.9	38.0 [11.1] 30.2 [8.9] 3.9	36.6 [10.7] 26.1 [7.7] 3.8	36.3 [10.6] 36.3 [10.6] 3.9	35.0 [10.3] 33.9 [9.9] 3.9	33.8 [9.9] 29.6 [8.7] 3.8
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	39.6 [11.6] 25.1 [7.4] 4.2	38.2 [11.2] 21.6 [6.3] 4.1	36.8 [10.8] 18.3 [5.4] 4.0	37.4 [11.0] 33.1 [9.7] 4.2	36.1 [10.6] 29.0 [8.5] 4.1	34.8 [10.2] 25.1 [7.4] 4.0	34.4 [10.1] 34.4 [10.1] 4.2	33.2 [9.7] 32.8 [9.6] 4.1	32.0 [9.4] 28.7 [8.4] 4.0

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A043JK

		ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①									
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	1680 [793]	1400 [661]	1120 [529]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW] Sens BTUH [kW] Power	51.7 [15.2] 31.5 [9.2] 2.6	49.9 [14.6] 27.0 [7.9] 2.6	48.1 [14.1] 22.8 [6.7] 2.5	49.5 [14.5] 39.5 [11.6] 2.6	47.7 [14.0] 34.3 [10.1] 2.6	46.0 [13.5] 29.6 [8.7] 2.5	46.4 [13.6] 43.4 [12.7] 2.6	44.8 [13.1] 38.1 [11.2] 2.5	43.2 [12.7] 33.1 [9.7] 2.5
	80 [26.7]	Total BTUH [kW] Sens BTUH [kW] Power	50.6 [14.8] 31.3 [9.2] 2.8	48.8 [14.3] 26.8 [7.9] 2.7	47.0 [13.8] 22.7 [6.7] 2.7	48.4 [14.2] 39.3 [11.5] 2.8	46.7 [13.7] 34.2 [10.0] 2.7	45.0 [13.2] 29.5 [8.7] 2.7	45.4 [13.3] 43.3 [12.7] 2.7	43.8 [12.8] 38.0 [11.1] 2.7	42.2 [12.4] 33.0 [9.7] 2.7
	85 [29.4]	Total BTUH [kW] Sens BTUH [kW] Power	49.4 [14.5] 30.9 [9.1] 3.0	47.7 [14.0] 26.6 [7.8] 2.9	45.9 [13.5] 22.5 [6.6] 2.9	47.2 [13.8] 38.9 [11.4] 2.9	45.5 [13.3] 33.9 [9.9] 2.9	43.9 [12.9] 29.3 [8.6] 2.8	44.2 [13.0] 43.0 [12.6] 2.9	42.6 [12.5] 37.7 [11.1] 2.9	41.1 [12.0] 32.8 [9.6] 2.8
	90 [32.2]	Total BTUH [kW] Sens BTUH [kW] Power	48.1 [14.1] 30.4 [8.9] 3.1	46.4 [13.6] 26.1 [7.7] 3.1	44.7 [13.1] 22.1 [6.5] 3.0	45.9 [13.5] 38.4 [11.3] 3.1	44.2 [13.0] 33.4 [9.8] 3.1	42.6 [12.5] 28.8 [8.5] 3.0	42.8 [12.5] 42.3 [12.4] 3.1	41.3 [12.1] 37.2 [10.9] 3.0	39.8 [11.7] 32.4 [9.5] 3.0
	95 [35]	Total BTUH [kW] Sens BTUH [kW] Power	46.6 [13.7] 29.6 [8.7] 3.3	45.0 [13.2] 25.5 [7.5] 3.3	43.3 [12.7] 21.6 [6.3] 3.2	44.4 [13.0] 37.6 [11.0] 3.3	42.8 [12.5] 32.8 [9.6] 3.3	41.3 [12.1] 28.4 [8.3] 3.2	41.4 [12.1] 41.4 [12.1] 3.3	39.9 [11.7] 36.6 [10.7] 3.2	38.5 [11.3] 31.9 [9.4] 3.2
	100 [37.8]	Total BTUH [kW] Sens BTUH [kW] Power	45.0 [13.2] 28.8 [8.5] 3.5	43.5 [12.7] 24.8 [7.3] 3.5	41.9 [12.3] 21.0 [6.2] 3.4	42.8 [12.5] 36.7 [10.8] 3.5	41.3 [12.1] 32.1 [9.4] 3.4	39.8 [11.7] 27.7 [8.1] 3.4	39.8 [11.7] 39.8 [11.7] 3.5	38.4 [11.3] 35.9 [10.5] 3.4	37.0 [10.8] 31.3 [9.2] 3.4
	105 [40.6]	Total BTUH [kW] Sens BTUH [kW] Power	43.4 [12.7] 27.9 [8.2] 3.7	41.8 [12.3] 23.9 [7.0] 3.7	40.3 [11.8] 20.3 [6.0] 3.6	41.1 [12.0] 35.6 [10.4] 3.7	39.7 [11.6] 31.2 [9.2] 3.7	38.3 [11.2] 27.0 [7.9] 3.6	38.1 [11.2] 38.1 [11.2] 3.7	36.8 [10.8] 35.0 [10.3] 3.6	35.4 [10.4] 30.5 [8.9] 3.6
	110 [43.3]	Total BTUH [kW] Sens BTUH [kW] Power	41.5 [12.2] 26.6 [7.8] 4.0	40.1 [11.8] 22.9 [6.7] 3.9	38.6 [11.3] 19.4 [5.7] 3.8	39.3 [11.5] 34.4 [10.1] 3.9	38.0 [11.1] 30.2 [8.9] 3.9	36.6 [10.7] 26.1 [7.7] 3.8	36.3 [10.6] 36.3 [10.6] 3.9	35.0 [10.3] 33.9 [9.9] 3.9	33.8 [9.9] 29.6 [8.7] 3.8
	115 [46.1]	Total BTUH [kW] Sens BTUH [kW] Power	39.6 [11.6] 25.1 [7.4] 4.2	38.2 [11.2] 21.6 [6.3] 4.1	36.8 [10.8] 18.3 [5.4] 4.0	37.4 [11.0] 33.1 [9.7] 4.2	36.1 [10.6] 29.0 [8.5] 4.1	34.8 [10.2] 25.1 [7.4] 4.0	34.4 [10.1] 34.4 [10.1] 4.2	33.2 [9.7] 32.8 [9.6] 4.1	32.0 [9.4] 28.7 [8.4] 4.0

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A048

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		1920 [906]	1600 [755]	1280 [604]	1920 [906]	1600 [755]	1280 [604]	1920 [906]	1600 [755]	1280 [604]	
DR ①		.12	.09	.04	.12	.09	.04	.12	.09	.04	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	61.1 [17.91]	59.0 [17.29]	56.8 [16.65]	57.3 [16.79]	55.3 [16.21]	53.3 [15.62]	54.4 [15.94]	52.5 [15.39]	50.6 [14.83]
		Sens BTUH [kW]	37.7 [11.05]	34.5 [10.11]	31.2 [9.14]	44.7 [13.10]	40.9 [11.99]	37.1 [10.87]	50.4 [14.77]	46.1 [13.51]	41.8 [12.25]
		Power	2.5	2.4	2.4	2.4	2.4	2.4	2.5	2.4	2.4
	80 [26.7]	Total BTUH [kW]	59.3 [17.38]	57.2 [16.76]	55.1 [16.15]	55.5 [16.27]	53.5 [15.68]	51.6 [15.12]	52.6 [15.42]	50.7 [14.86]	48.9 [14.33]
		Sens BTUH [kW]	37.0 [10.84]	33.9 [9.94]	30.7 [9.00]	44.1 [12.92]	40.3 [11.81]	36.5 [10.70]	49.7 [14.57]	45.5 [13.33]	41.2 [12.07]
		Power	2.6	2.6	2.6	2.6	2.6	2.5	2.6	2.6	2.5
	85 [29.4]	Total BTUH [kW]	57.6 [16.88]	55.6 [16.29]	53.5 [15.68]	53.8 [15.77]	51.9 [15.21]	50.0 [14.65]	50.9 [14.92]	49.1 [14.39]	47.3 [13.86]
		Sens BTUH [kW]	36.3 [10.64]	33.2 [9.73]	30.1 [8.82]	43.4 [12.72]	39.7 [11.63]	36.0 [10.55]	49.1 [14.39]	44.8 [13.13]	40.6 [11.90]
		Power	2.8	2.8	2.7	2.8	2.7	2.7	2.8	2.7	2.7
	90 [32.2]	Total BTUH [kW]	56.0 [16.41]	54.0 [15.83]	52.1 [15.27]	52.2 [15.30]	50.4 [14.77]	48.5 [14.21]	49.3 [14.45]	47.6 [13.95]	45.9 [13.45]
Sens BTUH [kW]		35.6 [10.43]	32.6 [9.55]	29.5 [8.65]	42.7 [12.51]	39.0 [11.43]	35.4 [10.37]	48.4 [14.18]	44.2 [12.95]	40.1 [11.75]	
Power		3.0	2.9	2.9	2.9	2.9	2.8	2.9	2.9	2.8	
95 [35]	Total BTUH [kW]	54.5 [15.97]	52.6 [15.42]	50.7 [14.86]	50.7 [14.86]	48.9 [14.33]	47.2 [13.83]	47.8 [14.01]	46.2 [13.54]	44.5 [13.04]	
	Sens BTUH [kW]	34.9 [10.23]	31.9 [9.35]	28.9 [8.47]	41.9 [12.28]	38.3 [11.22]	34.8 [10.20]	47.4 [13.89]	43.5 [12.75]	39.4 [11.55]	
	Power	3.1	3.1	3.0	3.1	3.0	3.0	3.1	3.1	3.0	
100 [37.8]	Total BTUH [kW]	53.1 [15.56]	51.2 [15.01]	49.4 [14.48]	49.3 [14.45]	47.6 [13.95]	45.8 [13.42]	46.4 [13.60]	44.8 [13.13]	43.1 [12.63]	
	Sens BTUH [kW]	34.1 [9.99]	31.2 [9.14]	28.3 [8.29]	41.2 [12.07]	37.7 [11.05]	34.1 [9.99]	46.4 [13.60]	42.8 [12.54]	38.8 [11.37]	
	Power	3.3	3.2	3.2	3.2	3.2	3.1	3.3	3.2	3.2	
105 [40.6]	Total BTUH [kW]	51.7 [15.15]	49.8 [14.59]	48.0 [14.07]	47.8 [14.01]	46.2 [13.54]	44.5 [13.04]	45.0 [13.19]	43.4 [12.72]	41.8 [12.25]	
	Sens BTUH [kW]	33.4 [9.79]	30.5 [8.94]	27.7 [8.12]	40.4 [11.84]	37.0 [10.84]	33.5 [9.82]	45.0 [13.19]	42.1 [12.34]	38.2 [11.20]	
	Power	3.5	3.4	3.3	3.4	3.4	3.3	3.4	3.4	3.3	
110 [43.3]	Total BTUH [kW]	50.2 [14.71]	48.4 [14.18]	46.7 [13.69]	46.4 [13.60]	44.8 [13.13]	43.1 [12.63]	43.5 [12.75]	42.0 [12.31]	40.5 [11.87]	
	Sens BTUH [kW]	32.6 [9.55]	29.8 [8.73]	27.0 [7.91]	39.6 [11.61]	36.2 [10.61]	32.9 [9.64]	43.5 [12.75]	41.4 [12.13]	37.5 [10.99]	
	Power	3.6	3.6	3.5	3.6	3.5	3.5	3.6	3.5	3.5	
115 [46.1]	Total BTUH [kW]	48.7 [14.27]	46.9 [13.75]	45.2 [13.25]	44.9 [13.16]	43.3 [12.69]	41.7 [12.22]	42.0 [12.31]	40.5 [11.87]	39.0 [11.43]	
	Sens BTUH [kW]	31.8 [9.32]	29.1 [8.53]	26.4 [7.74]	38.9 [11.40]	35.5 [10.40]	32.2 [9.44]	42.0 [12.31]	40.5 [11.87]	36.9 [10.81]	
	Power	3.8	3.7	3.6	3.7	3.7	3.6	3.8	3.7	3.6	

GROSS SYSTEMS PERFORMANCE DATA—RSPM-A060

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		2280 [1076]	1900 [897]	1520 [717]	2280 [1076]	1900 [897]	1520 [717]	2280 [1076]	1900 [897]	1520 [717]	
DR ①		.10	.07	.02	.10	.07	.02	.10	.07	.02	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	76.2 [22.33]	73.5 [21.54]	70.8 [20.75]	73.5 [21.54]	70.9 [20.78]	68.4 [20.05]	69.2 [20.28]	66.8 [19.58]	64.3 [18.84]
		Sens BTUH [kW]	46.2 [13.54]	42.2 [12.37]	38.3 [11.22]	56.0 [16.41]	51.3 [15.03]	46.5 [13.63]	63.3 [18.55]	57.9 [16.97]	52.5 [15.39]
		Power	3.4	3.3	3.3	3.3	3.2	3.2	3.3	3.2	3.2
	80 [26.7]	Total BTUH [kW]	74.6 [21.86]	71.9 [21.07]	69.3 [20.31]	71.9 [21.07]	69.4 [20.34]	66.8 [19.58]	67.6 [19.81]	65.2 [19.11]	62.8 [18.40]
		Sens BTUH [kW]	45.4 [13.31]	41.5 [12.16]	37.6 [11.02]	55.2 [16.18]	50.5 [14.80]	45.8 [13.42]	62.5 [18.32]	57.2 [16.76]	51.9 [15.21]
		Power	3.6	3.5	3.5	3.5	3.4	3.4	3.5	3.4	3.4
	85 [29.4]	Total BTUH [kW]	72.8 [21.34]	70.3 [20.60]	67.7 [19.84]	70.1 [20.54]	67.7 [19.84]	65.2 [19.11]	65.8 [19.28]	63.5 [18.61]	61.2 [17.94]
		Sens BTUH [kW]	44.6 [13.07]	40.8 [11.96]	37.0 [10.84]	54.5 [15.97]	49.8 [14.59]	45.2 [13.25]	61.8 [18.11]	56.5 [16.56]	51.2 [15.01]
		Power	3.8	3.8	3.7	3.7	3.7	3.6	3.7	3.6	3.6
	90 [32.2]	Total BTUH [kW]	70.9 [20.78]	68.4 [20.05]	65.9 [19.31]	68.2 [19.99]	65.9 [19.31]	63.5 [18.61]	63.9 [18.73]	61.7 [18.08]	59.4 [17.41]
Sens BTUH [kW]		43.8 [12.84]	40.1 [11.75]	36.4 [10.67]	53.7 [15.74]	49.1 [14.39]	44.5 [13.04]	61.0 [17.88]	55.8 [16.35]	50.6 [14.83]	
Power		4.0	4.0	3.9	3.9	3.9	3.8	3.9	3.9	3.8	
95 [35]	Total BTUH [kW]	68.9 [20.19]	66.5 [19.49]	64.1 [18.79]	66.2 [19.40]	63.9 [18.73]	61.6 [18.05]	61.9 [18.14]	59.7 [17.50]	57.6 [16.88]	
	Sens BTUH [kW]	43.0 [12.60]	39.4 [11.55]	35.7 [10.46]	52.9 [15.50]	48.4 [14.18]	43.9 [12.87]	60.4 [17.70]	55.1 [16.15]	49.9 [14.62]	
	Power	4.3	4.2	4.1	4.2	4.1	4.0	4.1	4.1	4.0	
100 [37.8]	Total BTUH [kW]	66.7 [19.55]	64.4 [18.87]	62.1 [18.20]	64.1 [18.79]	61.8 [18.11]	59.6 [17.47]	59.8 [17.53]	57.7 [16.91]	55.6 [16.29]	
	Sens BTUH [kW]	42.1 [12.34]	38.6 [11.31]	35.0 [10.26]	52.0 [15.24]	47.6 [13.95]	43.1 [12.63]	59.2 [17.35]	54.3 [15.91]	49.2 [14.42]	
	Power	4.5	4.4	4.3	4.4	4.3	4.2	4.4	4.3	4.2	
105 [40.6]	Total BTUH [kW]	64.5 [18.90]	62.2 [18.23]	59.9 [17.55]	61.8 [18.11]	59.6 [17.47]	57.4 [16.82]	57.5 [16.85]	55.5 [16.27]	53.4 [15.65]	
	Sens BTUH [kW]	41.1 [12.05]	37.6 [11.02]	34.1 [9.99]	51.0 [14.95]	46.6 [13.66]	42.3 [12.40]	57.5 [16.85]	53.3 [15.62]	48.3 [14.16]	
	Power	4.7	4.6	4.5	4.6	4.5	4.4	4.6	4.5	4.4	
110 [43.3]	Total BTUH [kW]	62.0 [18.17]	59.9 [17.55]	57.7 [16.91]	59.4 [17.41]	57.3 [16.79]	55.2 [16.18]	55.0 [16.12]	53.1 [15.56]	51.2 [15.01]	
	Sens BTUH [kW]	39.9 [11.69]	36.5 [10.70]	33.1 [9.70]	49.8 [14.59]	45.5 [13.33]	41.3 [12.10]	55.0 [16.12]	52.2 [15.30]	47.3 [13.86]	
	Power	4.9	4.8	4.8	4.8	4.7	4.7	4.8	4.7	4.6	
115 [46.1]	Total BTUH [kW]	59.5 [17.44]	57.4 [16.82]	55.3 [16.21]	56.8 [16.65]	54.8 [16.06]	52.8 [15.47]	52.5 [15.39]	50.7 [14.86]	48.8 [14.30]	
	Sens BTUH [kW]	38.4 [11.25]	35.2 [10.32]	31.9 [9.35]	48.3 [14.16]	44.2 [12.95]	40.1 [11.75]	52.5 [15.39]	50.7 [14.86]	46.1 [13.51]	
	Power	5.1	5.1	5.0	5.0	5.0	4.9	5.0	4.9	4.9	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power —KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 - DR) x (dbE - 80)].

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE — 230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—230 Volts Side Discharge—Wet Coil												
					External Static Pressure—Inches W.C. [kPa]												
					0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [1.10]	0.5 [1.12]	0.6 [1.15]	0.7 [1.17]	0.8 [1.20]	0.9 [1.22]	1.0 [1.25]			
2.0 [7.03]	Low	700/900	10x9 1/4 HP [186] 2-Speed Motor (PSC Motor)	Low	CFM	827 [390]	811 [383]	782 [369]	740 [349]	684 [323]	614 [290]	531 [251]	435 [205]	—	—	—	
					RPM	450	533	626	742	799	894	932	985	—	—	—	
					Watts	278	273	269	254	244	227	216	198	—	—	—	
					CFM	1230 [580]	1223 [577]	1216 [574]	1211 [572]	1187 [560]	1125 [531]	1020 [481]	874 [412]	696 [328]	504 [238]	—	—
2.5 [8.79]	Low	875/1125	10x9 1/3 HP [249] 2-Speed Motor (PSC Motor)	High	CFM	575	643	703	767	819	877	976	1001	1072	1092	—	
					RPM	479	468	455	448	431	416	357	341	279	259	—	
					Watts	455	468	455	448	431	416	357	341	279	259	—	
					CFM	1032 [487]	1030 [486]	1014 [479]	979 [462]	923 [436]	843 [398]	735 [347]	596 [281]	423 [200]	—	—	—
3.0 [10.55]	Low	1050/1350	10x9 1/2 HP [373] 2-Speed Motor (PSC Motor)	Low	CFM	533	570	659	746	795	863	934	1019	1050	—	—	
					RPM	336	331	326	314	303	280	271	227	210	—	—	
					Watts	336	331	326	314	303	280	271	227	210	—	—	
					CFM	1312 [619]	1301 [614]	1292 [610]	1276 [602]	1246 [588]	1196 [564]	1117 [527]	1003 [473]	845 [399]	—	—	—
3.5 [12.31]	Low	1225/1575	11x9 1/2 HP [373] 2-Speed Motor (PSC Motor)	High	CFM	592	646	712	768	824	883	933	1012	1035	—	—	
					RPM	482	473	466	454	433	421	401	349	329	—	—	
					Watts	482	473	466	454	433	421	401	349	329	—	—	
					CFM	1261 [595]	1253 [591]	1225 [578]	1177 [555]	1110 [524]	1023 [483]	915 [432]	788 [372]	641 [303]	—	—	—
4.0 [14.07]	Low	1400/1800	11x9 3/4 HP [559] 2-Speed Motor (PSC Motor)	Low	CFM	648	705	754	802	854	896	985	1008	1041	—	—	
					RPM	398	395	387	391	370	361	323	310	300	—	—	
					Watts	398	395	387	391	370	361	323	310	300	—	—	
					CFM	2068 [976]	2008 [948]	1957 [924]	1905 [899]	1841 [869]	1753 [827]	1629 [769]	1458 [688]	1228 [580]	929 [438]	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2-Speed Motor (PSC Motor)	High	CFM	850	883	917	946	972	999	1028	1049	1091	1108	—	—
					RPM	826	806	784	762	734	702	658	626	546	512	—	—
					Watts	826	806	784	762	734	702	658	626	546	512	—	—
					CFM	1431 [675]	1394 [658]	1348 [636]	1302 [614]	1258 [594]	1208 [570]	1140 [538]	1030 [486]	849 [401]	557 [263]	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2-Speed Motor (PSC Motor)	High	CFM	540	579	633	686	724	776	831	868	1035	1076	—	—
					RPM	482	479	477	470	459	453	437	423	335	292	—	—
					Watts	482	479	477	470	459	453	437	423	335	292	—	—
					CFM	1960 [925]	1936 [914]	1903 [898]	1859 [877]	1806 [852]	1742 [822]	1689 [788]	1585 [748]	1491 [704]	1387 [655]	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2-Speed Motor (PSC Motor)	Low	CFM	703	727	776	780	809	846	877	910	940	975	—	—
					RPM	783	782	776	759	750	729	712	686	656	625	—	—
					Watts	783	782	776	759	750	729	712	686	656	625	—	—
					CFM	1674 [790]	1638 [773]	1595 [753]	1547 [730]	1492 [704]	1432 [676]	1365 [644]	1293 [610]	1214 [573]	1129.05 [533]	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2-Speed Motor (PSC Motor)	High	CFM	576	618	668	708	753	789	832	874	915	954	—	—
					RPM	575	563	556	549	544	532	522	503	483	465	—	—
					Watts	575	563	556	549	544	532	522	503	483	465	—	—
					CFM	1996 [942]	1976 [933]	1947 [919]	1909 [901]	1863 [879]	1808 [853]	1744 [823]	1671 [789]	1590 [750]	1500 [708]	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2-Speed Motor (PSC Motor)	High	CFM	680	722	752	781	807	833	867	912	936	973	—	—
					RPM	799	787	784	760	753	749	730	699	693	652	—	—
					Watts	799	787	784	760	753	749	730	699	693	652	—	—
					CFM	2044 [965]	2017 [952]	1983 [936]	1941 [916]	1892 [893]	1836 [866]	1773 [837]	1702 [803]	1623 [766]	1537 [725]	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2-Speed Motor (PSC Motor)	High	CFM	689	723	756	798	822	855	889	924	951	988	—	—
					RPM	886	870	865	849	831	817	799	782	755	726	—	—
					Watts	886	870	865	849	831	817	799	782	755	726	—	—
					CFM	2693 [1271]	2654 [1253]	2606 [1230]	2549 [1203]	2483 [1172]	2408 [1136]	2323 [1096]	2230 [1052]	2127 [1004]	2015 [951]	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2-Speed Motor (PSC Motor)	High	CFM	876	897	915	938	956	975	996	1009	1025	1044	—	—
					RPM	1438	1427	1399	1368	1340	1312	1274	1228	1192	1146	—	—
					Watts	1438	1427	1399	1368	1340	1312	1274	1228	1192	1146	—	—
					CFM	1438	1427	1399	1368	1340	1312	1274	1228	1192	1146	—	—

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE — 208 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—208 Volts Side Discharge—Wet Coil										
					External Static Pressure—Inches W.C. [kPa]										
					0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [1.10]	0.5 [1.12]	0.6 [1.15]	0.7 [1.17]	0.8 [2.0]	0.9 [2.2]	1.0 [2.5]	
2.0 [7.03]	Low	700/900	10x9 1/4 HP [186] 2 Speed Motor (PSC Motor)	Low	CFM	723 [341]	692 [327]	654 [309]	609 [287]	556 [262]	496 [234]	428 [202]	—	—	—
					RPM	443	528	651	710	819	863	914	—	—	—
					Watts	230	222	219	214	202	196	184	—	—	—
2.5 [8.79]	Low	875/1125	10x9 1/3 HP [249] 2 Speed Motor (PSC Motor)	High	CFM	1062 [501]	1062 [501]	1058 [499]	1043 [492]	1013 [478]	962 [454]	884 [417]	774 [365]	627 [296]	437 [206]
					RPM	528	618	674	735	812	895	936	985	1055	1080
					Watts	396	393	384	376	361	335	318	297	244	223
3.0 [10.55]	Low	1050/1350	10x9 1/2 HP [373] 2 Speed Motor (PSC Motor)	Low	CFM	923 [436]	904 [427]	874 [412]	832 [393]	774 [365]	698 [329]	602 [284]	483 [228]	—	—
					RPM	498	543	648	728	806	853	947	989	—	—
					Watts	280	278	268	259	252	243	219	201	—	—
3.5 [12.31]	Low	1225/1575	11x9 1/2 HP [373] 2 Speed Motor (PSC Motor)	High	CFM	1164 [549]	1154 [545]	1143 [539]	1124 [530]	1090 [514]	1034 [488]	948 [447]	826 [390]	660 [311]	445 [210]
					RPM	526	596	670	744	803	864	945	971	1051	1078
					Watts	401	398	388	379	371	350	322	310	259	235
4.0 [14.07]	Low	1400/1800	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	Low	CFM	1145 [540]	1142 [539]	1118 [528]	1073 [506]	1006 [475]	918 [433]	—	—	—	—
					RPM	556	645	703	769	828	909	—	—	—	—
					Watts	346	340	335	326	321	298	—	—	—	—
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1884 [889]	1850 [873]	1815 [857]	1772 [836]	1712 [808]	1630 [769]	1516 [715]	1363 [643]	1164 [549]	910 [429]
					RPM	791	834	871	912	946	975	1004	1032	1083	1097
					Watts	704	694	675	655	638	606	581	548	464	440
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1279 [604]	1237 [584]	1196 [564]	1151 [543]	1098 [518]	1032 [487]	950 [448]	846 [399]	717 [338]	588 [263]
					RPM	490	539	598	653	709	772	811	887	928	978
					Watts	401	400	393	391	381	373	364	343	329	305
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1751 [826]	1729 [816]	1698 [801]	1658 [782]	1608 [759]	1549 [731]	1481 [699]	1404 [663]	1317 [622]	1221 [576]
					RPM	640	668	706	734	781	813	851	888	937	968
					Watts	660	658	651	644	628	617	603	581	557	524
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1400 [661]	1393 [657]	1373 [648]	1337 [631]	1288 [608]	1225 [578]	1147 [541]	1055 [498]	949 [448]	828 [391]
					RPM	536	578	623	677	718	782	830	863	902	976
					Watts	471	466	458	455	453	442	429	420	403	374
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1786 [843]	1764 [833]	1734 [818]	1695 [800]	1649 [778]	1595 [753]	1532 [723]	1462 [690]	1384 [653]	1297 [612]
					RPM	618	643	684	726	757	805	841	883	924	955
					Watts	665	660	651	646	638	626	612	596	573	555
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	1848 [872]	1821 [859]	1785 [842]	1742 [822]	1690 [798]	1630 [769]	1582 [737]	1486 [701]	1402 [662]	1309 [618]
					RPM	660	685	722	755	795	836	867	904	940	975
					Watts	731	725	720	707	698	680	665	651	623	596
5.0 [17.6]	Low	1750/2250	11x9 3/4 HP [559] 2 Speed Motor (PSC Motor)	High	CFM	2444 [1153]	2420 [1142]	2384 [1125]	2337 [1103]	2278 [1075]	2208 [1042]	2127 [1004]	2034 [960]	1930 [911]	1814 [856]
					RPM	829	838	863	885	914	936	958	983	1003	1029
					Watts	1225	1218	1197	1191	1160	1135	1105	1068	1035	980

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE — 230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—230 Volts Side Discharge—Wet Coil												
					External Static Pressure—Inches W.C. [kPa]												
					0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [1.10]	0.5 [1.12]	0.6 [1.15]	0.7 [1.17]	0.8 [1.20]	0.9 [1.22]	1.0 [1.25]			
2.0 [7.03]	Low (Tap 2)	700/900	10x9 1/4 HP [186] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM RPM Watts	939 [443] 585 131	877 [414] 601 116	816 [385] 655 97	754 [356] 744 110	693 [327] 809 121	631 [298] 860 126	570 [269] 915 136	508 [240] 1001 149	447 [211] 1043 152	—		
				High (Tap 1)	CFM RPM Watts	1240 [585] 607 634	1184 [559] 761 634	1127 [532] 698 159	1014 [479] 761 173	958 [452] 880 182	901 [425] 946 196	845 [399] 989 210	788 [372] 1038 231	732 [345] 1091 237			
	2.5 [8.79]		Low (Tap 2)	875/1125	10x9 1/3 HP [249] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM RPM Watts	1169 [552] 603 144	1109 [523] 619 130	1049 [495] 693 138	988 [466] 756 151	928 [438] 809 159	868 [410] 893 174	807 [381] 942 185	747 [353] 989 195	687 [324] 1034 199	626 [295] 1076 209
						High (Tap 1)	CFM RPM Watts	1365 [644] 631 177	1316 [621] 677 190	1266 [597] 732 204	1217 [574] 784 218	1168 [551] 843 234	1119 [528] 894 247	1069 [505] 942 256	1020 [481] 1035 279	971 [458] 1077 289	922 [435] 1118 294
3.0 [10.55]	Low (Tap 2)	1050/1350	10x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor		Low (Tap 2)	CFM RPM Watts	1328 [627] 648 178	1280 [604] 697 191	1438 [679] 752 206	1183 [558] 807 220	1135 [536] 857 233	1086 [513] 903 246	1038 [490] 989 265	990 [467] 1036 277	941 [444] 1077 286	893 [421] 1114 291	
					High (Tap 1)	CFM RPM Watts	1510 [713] 707 248	1464 [691] 743 261	1418 [669] 792 277	1373 [648] 841 292	1327 [626] 890 307	1281 [605] 5021 322	1235 [583] 981 334	1190 [562] 1031 348	1144 [540] 1114 366	1088 [518] 1151 358	
3.5 [12.31]	Low (Tap 2)		1225/1575	11x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM RPM Watts	1542 [728] 598 244	1490 [703] 617 231	1438 [679] 662 237	1386 [654] 714 254	1335 [630] 758 270	1283 [606] 800 285	1231 [581] 849 304	1180 [557] 876 313	1128 [532] 913 326	1076 [508] 951 340	
					High (Tap 1)	CFM RPM Watts	1740 [821] 632 295	1695 [800] 311 311	1649 [778] 331 331	1604 [757] 350 350	1558 [735] 749 371	1513 [714] 833 386	1467 [692] 879 409	1422 [671] 917 426	1376 [649] 951 440	1331 [628] 981 454	
4.0 [14.07]	Low (Tap 2)	1400/1800		11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM RPM Watts	1701 [803] 624 280	1655 [781] 648 287	1609 [759] 696 309	1563 [738] 743 328	1517 [716] 787 347	1471 [694] 826 363	1425 [673] 863 380	1379 [651] 895 392	1333 [629] 934 410	1287 [607] 970 426	
					High (Tap 1)	CFM RPM Watts	1921 [907] 678 385	1878 [886] 706 400	1835 [866] 738 416	1792 [846] 776 439	1749 [825] 816 458	1706 [805] 865 484	1663 [785] 899 501	1620 [765] 932 517	1577 [744] 967 537	1534 [724] 994 550	
5.0 [17.6]	Low (Tap 2)		1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM RPM Watts	1986 [937] 731 446	1945 [918] 759 458	1905 [899] 792 477	1864 [880] 832 499	1823 [860] 871 521	1782 [841] 909 543	1741 [822] 943 562	1700 [802] 979 582	1659 [783] 1014 600	1618 [764] 1055 621	
					High (Tap 1)	CFM RPM Watts	2229 [1052] 795 619	2190 [1034] 824 638	2152 [1016] 851 658	2114 [998] 882 680	2075 [979] 919 703	2037 [961] 952 724	1999 [943] 983 745	1960 [925] 1013 764	1922 [907] 1045 784	1884 [889] 1077 804	

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE — 208 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory	Manufacturer Recommended Air-Flow Range (Min/Max) CFM	Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—208 Volts Side Discharge—Wet Coil										
					External Static Pressure—Inches W.C. [kPa]										
					0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	0.9 [.22]	1.0 [.25]	
2.0 [7.03]	Low (Tap 2)	700/900	10x9 1/4 HP [186] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	959 [453]	892 [421]	825 [389]	758 [358]	691 [326]	624 [294]	557 [263]	491 [232]		
					RPM	582	606	655	723	808	851	906	996		
					Watts	132	110	96	106	119	123	132	144		
2.5 [8.79]	Low (Tap 2)	875/1125	10x9 1/3 HP [249] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1229 [580]	1170 [552]	1112 [525]	1054 [497]	996 [470]	938 [443]	879 [415]	821 [387]	763 [360]	705 [333]
					RPM	607	634	698	761	815	880	946	989	1038	1091
					Watts	161	145	159	173	182	196	210	220	231	237
3.0 [10.55]	Low (Tap 2)	1050/1350	10x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1162 [548]	1099 [519]	1035 [488]	972 [459]	908 [429]	844 [398]	781 [369]	717 [338]	654 [309]	590 [278]
					RPM	603	626	690	752	815	906	941	984	1027	1096
					Watts	143	124	136	148	157	175	180	188	192	202
3.5 [12.31]	Low (Tap 2)	1050/1350	10x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1306 [616]	1253 [591]	1200 [566]	1147 [541]	1095 [517]	1042 [492]	989 [467]	937 [442]	884 [417]	831 [392]
					RPM	632	679	733	787	841	883	941	1035	1067	1099
					Watts	174	187	201	215	227	235	248	266	273	277
3.5 [12.31]	Low (Tap 2)	1225/1575	11x9 1/2 HP [373] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1328 [627]	1276 [602]	1223 [577]	1171 [553]	1118 [528]	1066 [503]	1013 [478]	961 [454]		
					RPM	642	693	747	803	852	903	988	1031		
					Watts	173	187	200	214	226	238	254	263		
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1508 [712]	1459 [689]	1409 [665]	1359 [641]	1310 [618]	1260 [595]	1210 [571]	1160 [547]	1111 [524]	1061 [501]
					RPM	698	738	789	839	888	933	983	1035	1103	1137
					Watts	243	255	271	285	299	310	322	332	343	343
4.0 [14.07]	Low (Tap 2)	1400/1800	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1531 [723]	1477 [697]	1423 [672]	1370 [647]	1316 [621]	1262 [596]	1208 [570]	1154 [545]	1101 [520]	1047 [494]
					RPM	602	619	668	715	757	801	844	878	918	954
					Watts	238	227	236	251	266	281	296	307	320	333
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1724 [814]	1678 [792]	1632 [770]	1586 [749]	1540 [727]	1495 [706]	1449 [684]	1403 [662]	1357 [640]	1311 [619]
					RPM	639	671	715	759	794	834	875	911	948	977
					Watts	295	309	330	348	363	380	397	414	429	440
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1708 [806]	1658 [782]	1609 [759]	1559 [736]	1510 [713]	1460 [689]	1410 [665]	1361 [642]	1311 [619]	1262 [596]
					RPM	619	651	686	741	783	822	859	894	937	971
					Watts	280	284	298	323	339	355	370	385	402	415
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	1917 [905]	1872 [883]	1827 [862]	1782 [841]	1736 [819]	1691 [798]	1646 [777]	1601 [756]	1556 [734]	1510 [713]
					RPM	673	702	736	769	818	860	898	928	960	989
					Watts	377	392	409	426	451	473	490	504	518	531
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	Low (Tap 2)	CFM	1954 [922]	1914 [903]	1874 [884]	1833 [865]	1793 [846]	1753 [827]	1713 [808]	1673 [790]	1632 [770]	1592 [751]
					RPM	719	747	779	818	857	894	928	963	998	1038
					Watts	439	451	469	491	512	534	553	573	590	611
5.0 [17.6]	Low (Tap 2)	1750/2250	11x9 3/4 HP [559] 2 Speed X-13 (ECM) Motor	High (Tap 1)	CFM	2173 [1026]	2136 [1008]	2098 [990]	2061 [973]	2024 [955]	1986 [937]	1949 [920]	1911 [902]	1874 [884]	1837 [867]
					RPM	775	803	830	860	896	928	959	988	1019	1050
					Watts	604	622	642	663	686	706	727	745	765	784

[] Designates Metric Conversions

ELECTRICAL DATA – RSPM													
		-A024JK	-A030JK	-A036CK	-A036JK	-A042CK	-A042JK	A043CK	A043JK	-A048CK	-A048JK	-A060CK	-A060JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253
	Minimum Circuit Ampacity	23/23	24/24	22/22	27/27	25/25	30/30	25/25	30/30	27/27	35/35	30/30	43/43
	Minimum Overcurrent Protection Device Size	30/30	30/30	25/25	35/35	30/30	35/35	30/30	35/35	30/30	40/40	35/35	50/50
	Maximum Overcurrent Protection Device Size	35/35	35/35	30/30	40/40	35/35	45/45	35/35	45/45	40/40	50/50	45/45	60/60
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3	1	3	1	3	1	3	1
	HP	2	2.5	3	3	3.5	3.5	3450	3450	4	4	4.5	4.5
	RPM	3450	3450	3450	3450	3450	3450	3 1/2	3.5	3450	3450	3450	3450
	Amps (RLA)	13.5/13.5	14.1/14.1	12.8/12.8	17/17	13.5/13.5	17.9/17.9	13.5/13.5	17.9/17.9	14.7/14.7	21.2/21.2	16/16	26.4/26.4
	Amps (LRA)	58.3/58.3	73/73	95/95	96.7/96.7	88/88	112/112	88/88	112/112	115/115	115/115	110/110	134/134
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	1.5/1.5	1.5/1.5	1.9	1.9	1.9	1.9
	Amps (LRA)	3	3	3	3	3	3	3/3	3/3	4	4	4	4
	Amps (FLA)	1.5	1.5	1.5	1.5	1.5	1.5	1.5/1.5	1.5/1.5	1.9	1.9	1.9	1.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1	1	1
	HP	1/4	1/3	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4	3/4
	Amps (FLA)	4.1	4.1	4.1	4.1	6	6	6/6	6/6	6	6	7.6	7.6

208-240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

Single Power Supply For Both Unit and Heater Kit


Unit Model No. RSPM-	Single Power Supply For Both Unit and Heater Kit										Separate Power Supply For Both Unit and Heater Kit					
	Heater Kit										Heater Kit				Heat Pump	
	RXQJ-C Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208-240 V	Heater KBTU/Hr @ 208-240 V	Heater Amp. @ 208-240 V	Unit Min. Ckt. Ampacity @ 208-240 V	Over Current Protective Device Size		Min. Circuit Ampacity 208-240 V	Min. Ckt. Ampacity	Max. Fuse Size	Min./Max. @ 208 V	Over Current Protective Device Size Min./Max. @ 240 V		
A024J	No Heat	—	—	—	—	—	23/23	30/35	30/35	23/23	—	—	30/35	30/35		
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/31	30/35	35/35	—	22/25	25/25	—	—		
	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	—	33/38	35/40	—	—		
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	—	44/50	45/50	—	—		
A030J	No Heat	—	—	—	—	—	24/24	30/35	30/35	24/24	—	—	30/35	30/35		
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/31	30/35	35/35	—	22/25	25/25	—	—		
	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	—	33/38	35/40	—	—		
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	—	44/50	45/50	—	—		
A036J	No Heat	—	2	10.8/14.4	36.85/49.13	52/60	71/81	80/80	90/90	—	65/75	70/80	—	—		
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	27/27	35/40	35/40	—	—	—	35/40	35/40		
	07J	1	1	5.4/7.2	18.42/24.56	26/30	38/43	40/40	45/45	—	22/25	25/25	—	—		
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	49/56	50/50	60/60	—	33/38	35/40	—	—		
A042J A043J	No Heat	—	2	10.8/14.4	36.85/49.13	52/60	71/81	80/80	90/90	—	65/75	70/80	—	—		
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	30/30	35/45	35/45	—	—	—	35/45	35/45		
	07J	1	1	5.4/7.2	18.42/24.56	26/30	40/45	40/40	45/45	—	22/25	25/25	—	—		
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	51/58	60/60	60/60	—	33/38	35/40	—	—		
A048J	No Heat	—	2	14.4/19.2	49.12/65.52	69.33/80	73/83	80/80	90/90	—	65/75	70/80	—	—		
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	35/35	40/50	40/50	—	—	—	40/50	40/50		
	07J	1	1	5.4/7.2	18.42/24.56	26/30	40/45	40/40	45/45	—	22/25	25/25	—	—		
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	51/58	60/60	60/60	—	33/38	35/40	—	—		
A060J	No Heat	—	2	10.8/14.4	36.85/49.13	52/60	73/83	80/80	90/90	—	65/75	70/80	—	—		
	05J	1	1	3.6/4.8	12.28/16.38	17.33/20	43/43	50/60	50/60	—	—	—	50/60	50/60		
	07J	1	1	5.4/7.2	18.42/24.56	26/30	43/47	50/60	50/60	—	22/25	25/25	—	—		
	10J	2	1	7.2/9.6	24.57/32.76	34.7/40	53/60	60/60	60/60	—	33/38	35/40	—	—		
A060J	15J	3	2	10.8/14.4	36.85/49.13	52/60	75/85	80/80	90/90	—	65/75	70/80	—	—		
	20J	4	2	14.4/19.2	49.12/65.52	69.33/80	97/110	100/100	110/110	—	87/100	90/100	—	—		

208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION														
Single Power Supply For Both Unit and Heater Kit														
Unit Model No. RSPM-	RXQJ-C Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208-240 V	Heater Kit				Heat Pump					
					Heater KBTU/Hr @ 208-240 V	Heater Amp. @ 208-240 V	Unit Min. Ckt. Ampacity @ 208-240 V	Over Current Protective Device Size @ 208 V		Min. Circuit Ampacity 208-240 V		Max. Fuse Size		Over Current Protective Device Size @ 240 V
									Min./Max.	Min./Max.		Min./Max.	Min./Max.	
A036C	No Heat	—	—	—	—	—	—	22/22	25/30	25/30	—	22/22	25/30	25/30
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	31/34	35/35	35/35	25/29	25/30	—	—	—
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	43/49	45/45	50/50	38/44	40/45	—	—	—
A042C A043C	No Heat	—	—	—	—	—	25/25	30/35	30/35	—	25/25	30/35	30/35	
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	33/37	35/35	40/40	25/29	25/30	—	—	
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	46/51	50/50	60/60	38/44	40/45	—	—	
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	58/66	60/60	70/70	50/58	50/60	—	—	
A048C	No Heat	—	—	—	—	—	27/27	30/40	30/40	—	27/27	30/40	30/40	
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	33/37	35/35	40/40	25/29	25/30	—	—	
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	46/51	50/50	60/60	38/44	40/45	—	—	
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	58/66	60/60	70/70	50/58	50/60	—	—	
A060C	No Heat	—	—	—	—	—	30/30	35/45	35/45	—	30/30	35/45	35/45	
	10C	2	1	7.2/9.6	24.57/32.76	20/23.1	35/39	35/35	40/40	25/29	25/30	—	—	
	15C	3	2	10.8/14.4	36.85/49.13	30.1/34.7	48/53	50/50	60/60	38/44	40/45	—	—	
	20C	4	2	14.4/19.2	49.12/65.52	40/46.3	60/68	60/60	70/70	50/58	50/60	—	—	


DIMENSIONS

Model	Height "A"
024, 030, 036, 042, 043	29 1/8"
048, 060	37 1/8"

FRONT VIEW

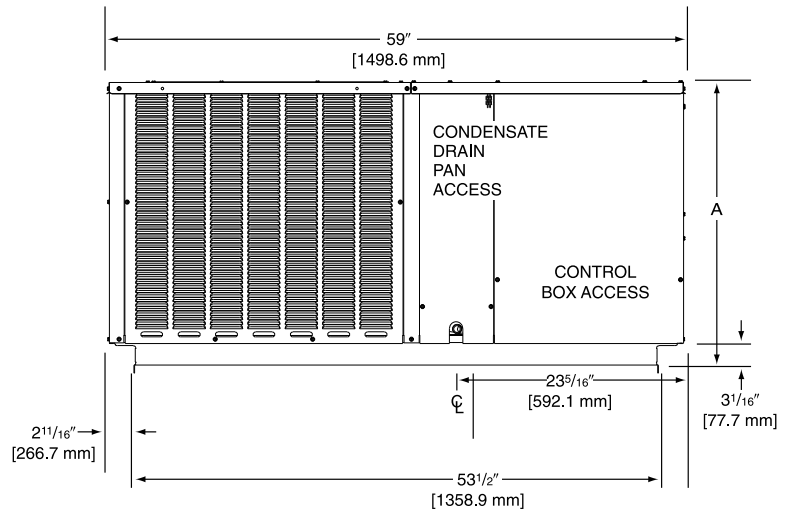


REAR VIEW


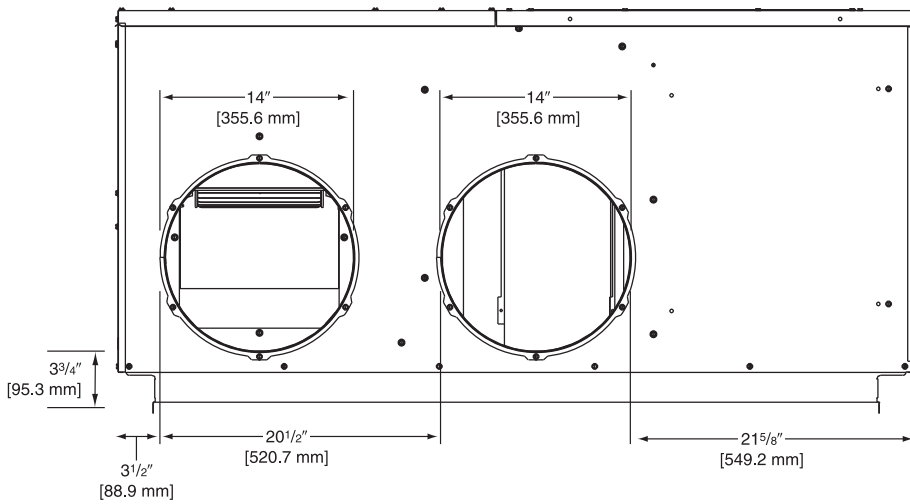


BOTTOM VIEW

ELECTRICAL CONNECTIONS

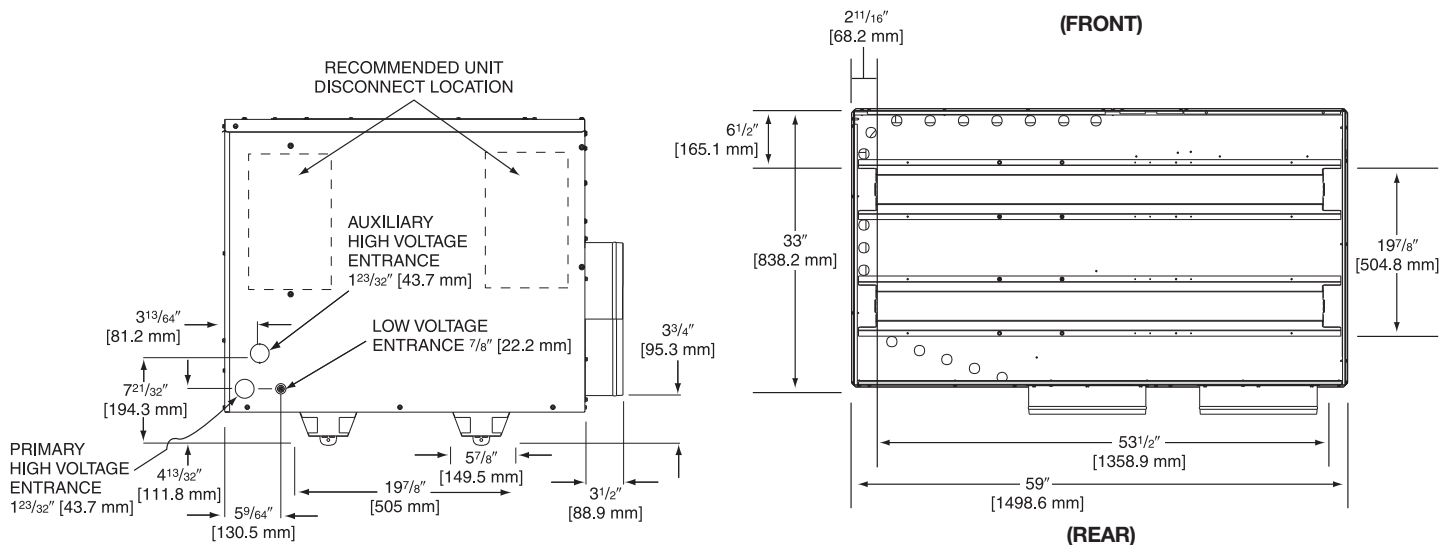

[] Designates Metric Conversions

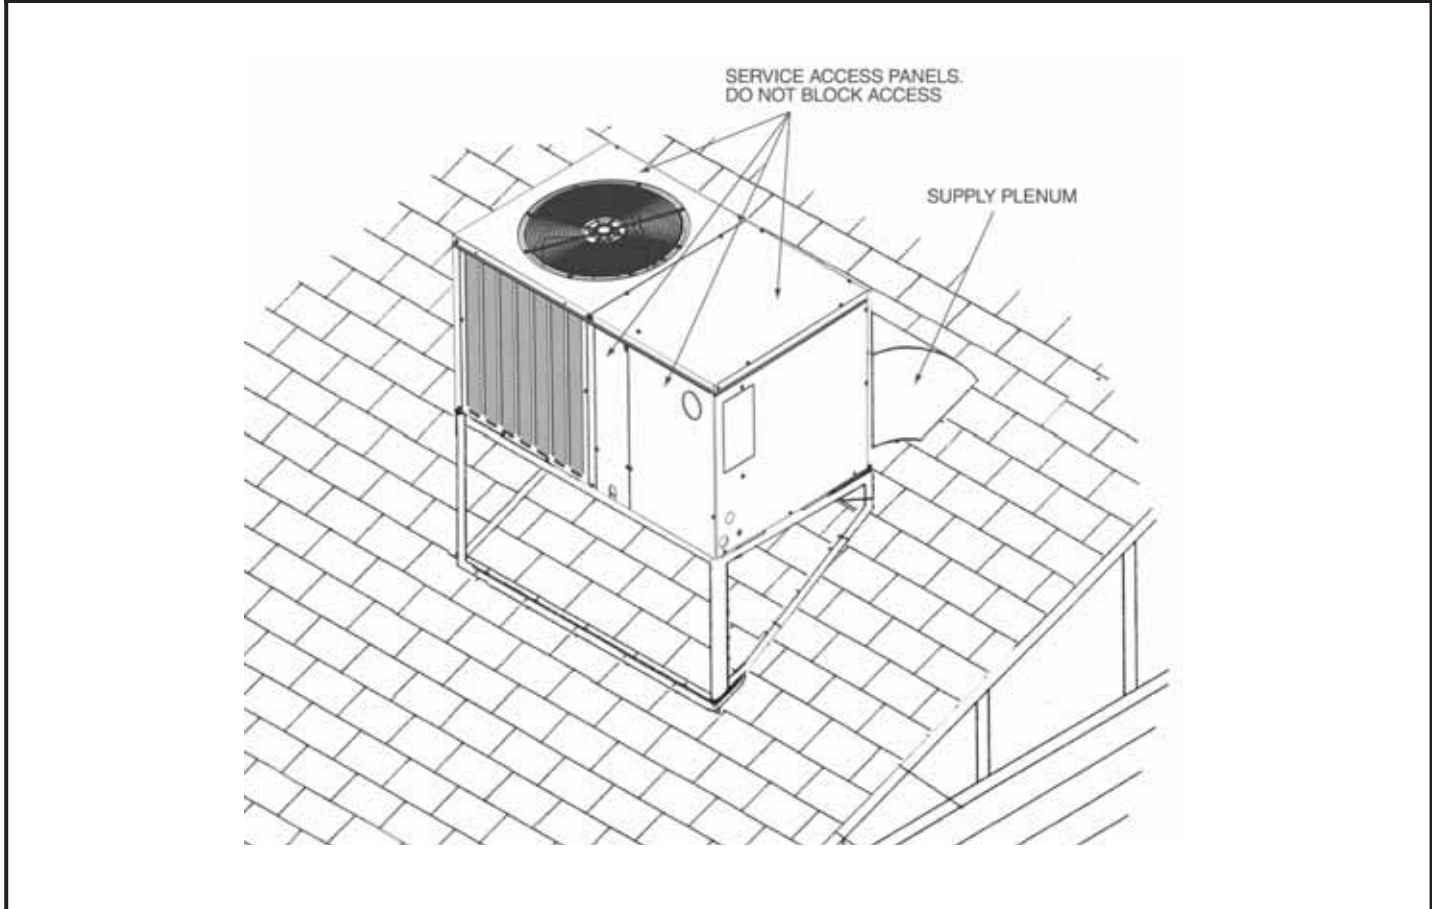
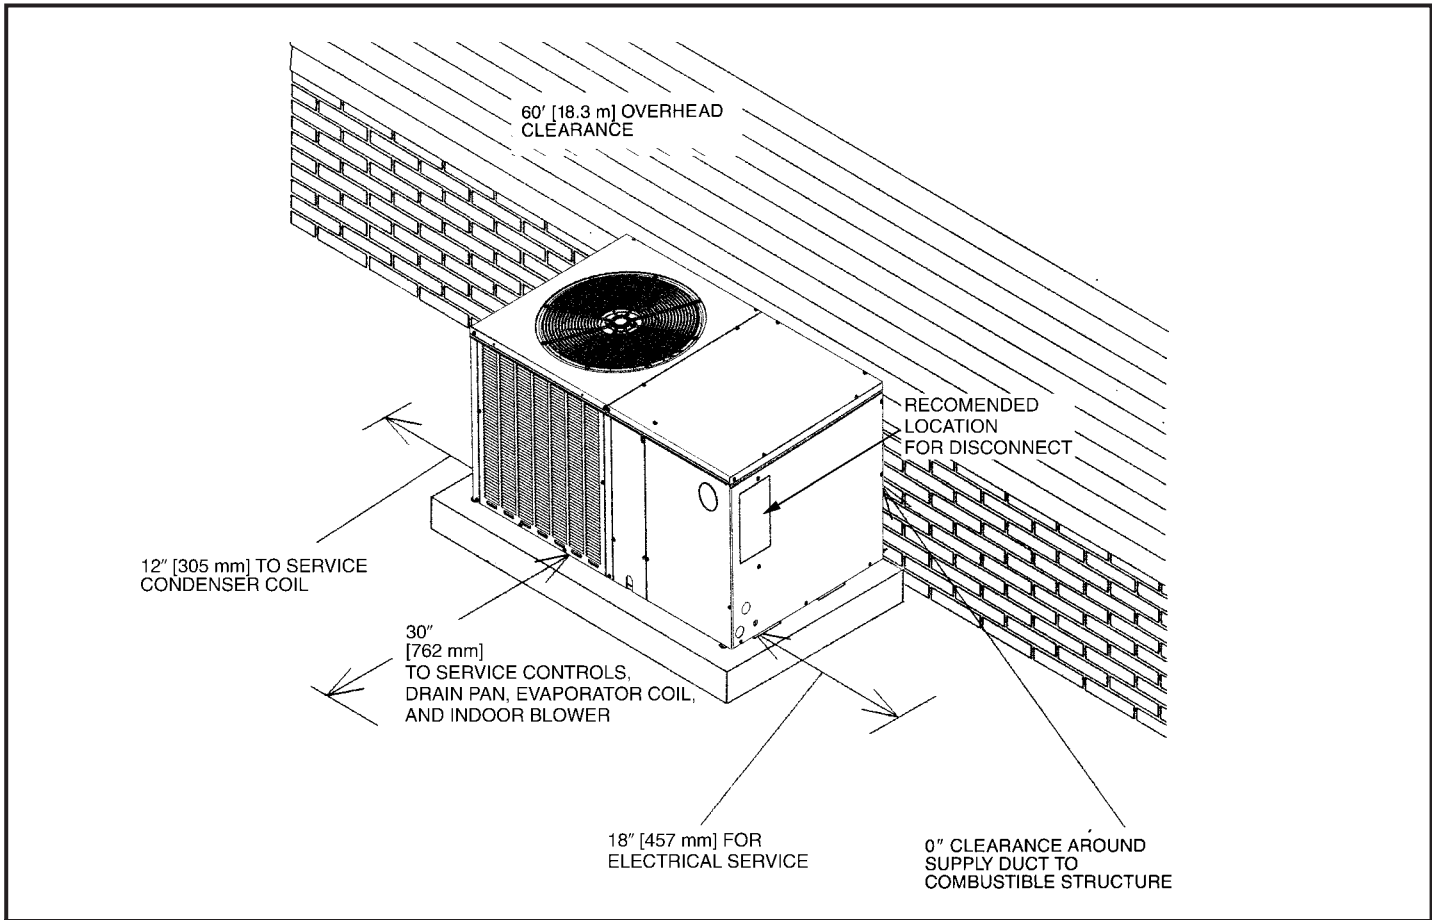


[] Designates Metric Conversions

ACCESSORY EQUIPMENT

Accessory Description	Model Application	Accessory Model No.
Outdoor Thermostat	RSNM/RSPM	RXPT-A01

SCHEMATIC DIAGRAM

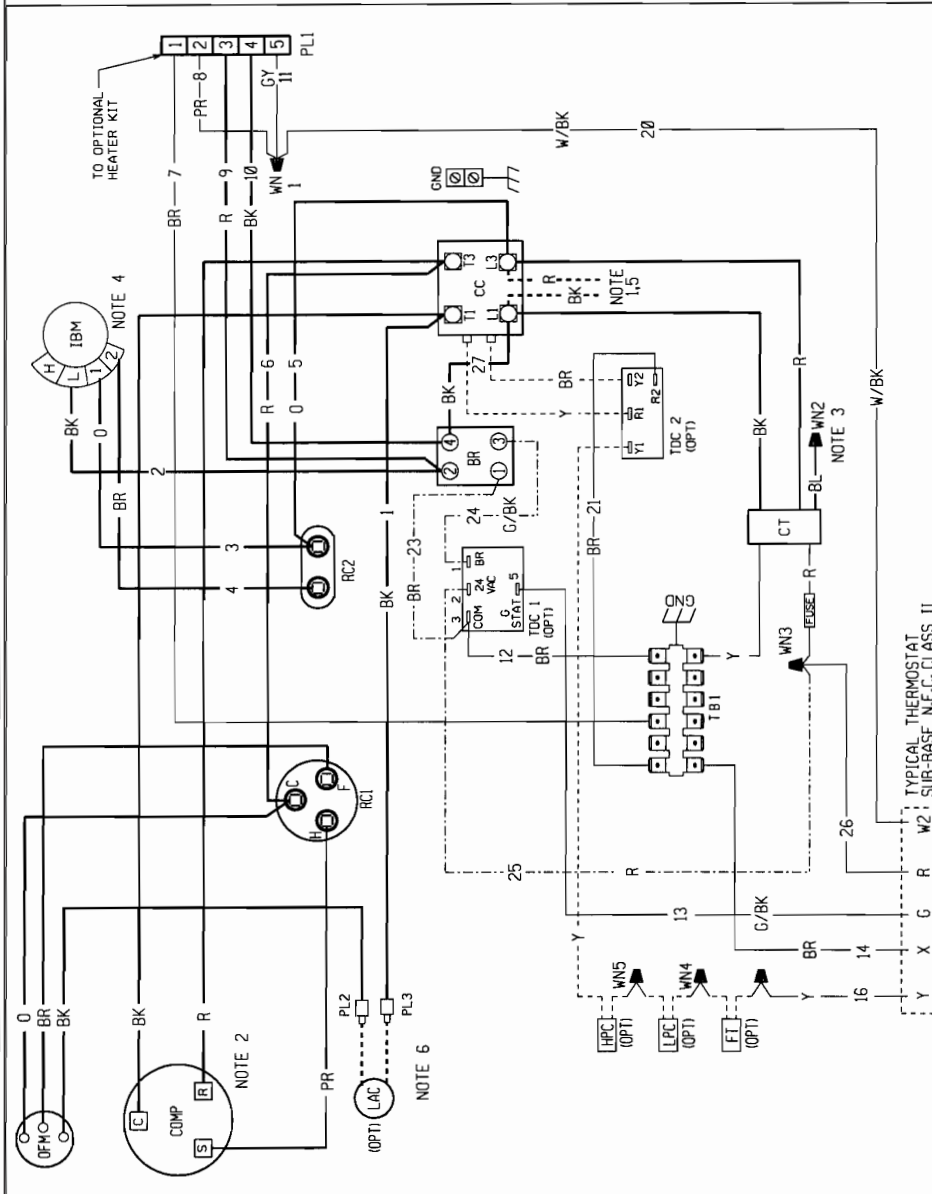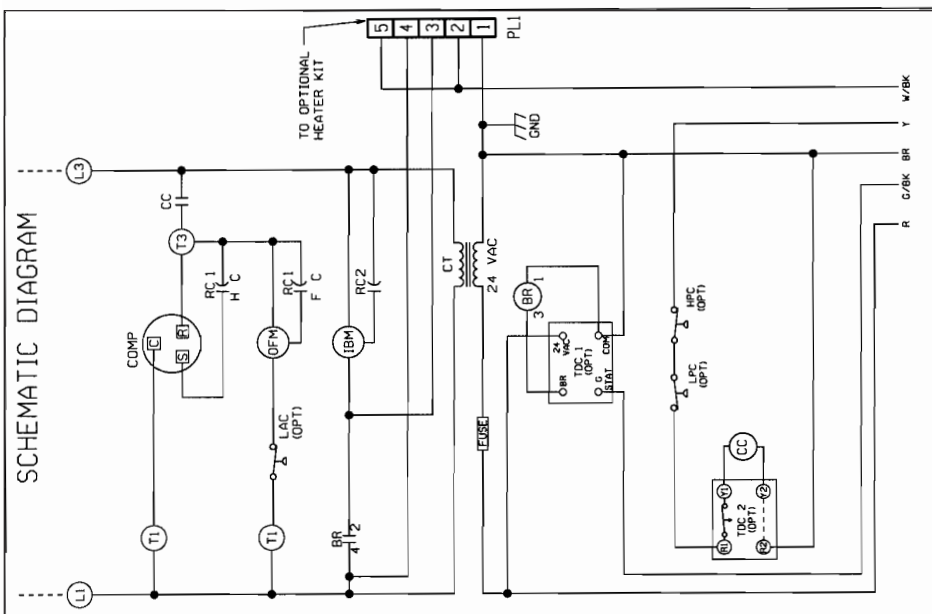

WIRE COLOR CODE

BK	BLACK
BR	BROWN
BL	BLUE
G	GREEN
GY	GRAY
W	WHITE
Y	YELLOW
O	ORANGE
PR	PURPLE
R	RED

ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER

1 PH, 208-230	VOLT - 60 HZ
1 PH, 220-240	VOLT - 50 HZ

DR. BY: B.J.L. DATE: 03-09-04 DWG. NO.: 90-23637-05 REV: 04

WIRING INFORMATION

- LINE VOLTAGE
- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- LOW VOLTAGE
- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- REPLACE WIRE
- MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)
- WARNING
- CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

NOTES:



- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRE FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRE FOR LOW SPEED. SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FIELD WIRING OR CONNECTION FROM HEATER KIT FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.

COMPONENT CODE

LPC	LOW PRESSURE CONTROL
OFM	OUTDOOR FAN MOTOR
OPT	OPTIONAL
PL	PLUG CAPACITOR
PL	TERMINAL BLOCK
TB	TIME DELAY CONTROL
TDC	WIRE NUT
▲	
BR	BLOWER RELAY
CC	COMPRESSOR CONTACTOR
COMP	COMPRESSOR MOTOR
FT	FREEZE STAT
GND	GROUND
HPC	HIGH PRESSURE CONTROL
IBM	INDOOR BLOWER MOTOR
LAC	LOW AMBIENT COOLING CONTROL

DWG. NO.: 90-23637-05 REV: 04

SCHEMATIC DIAGRAM

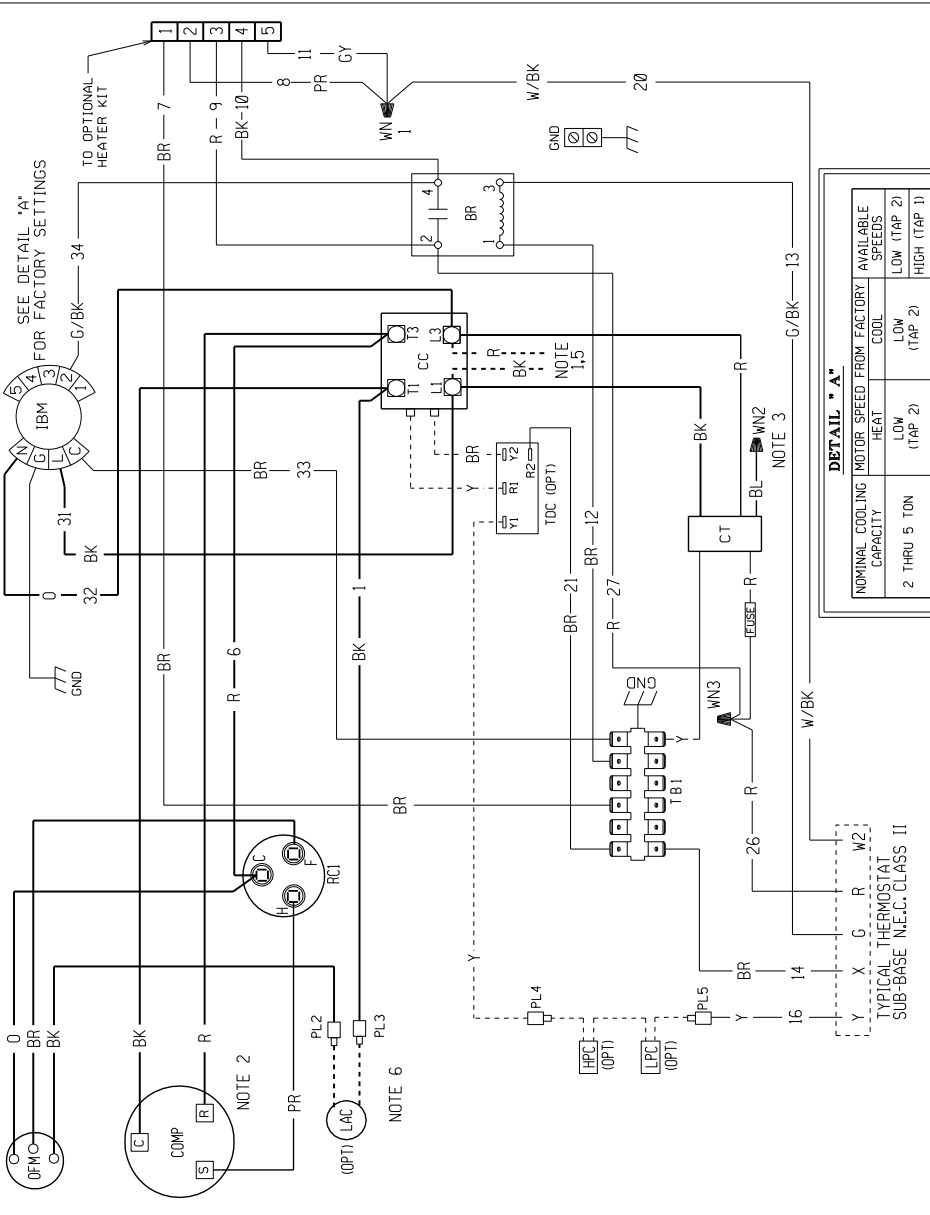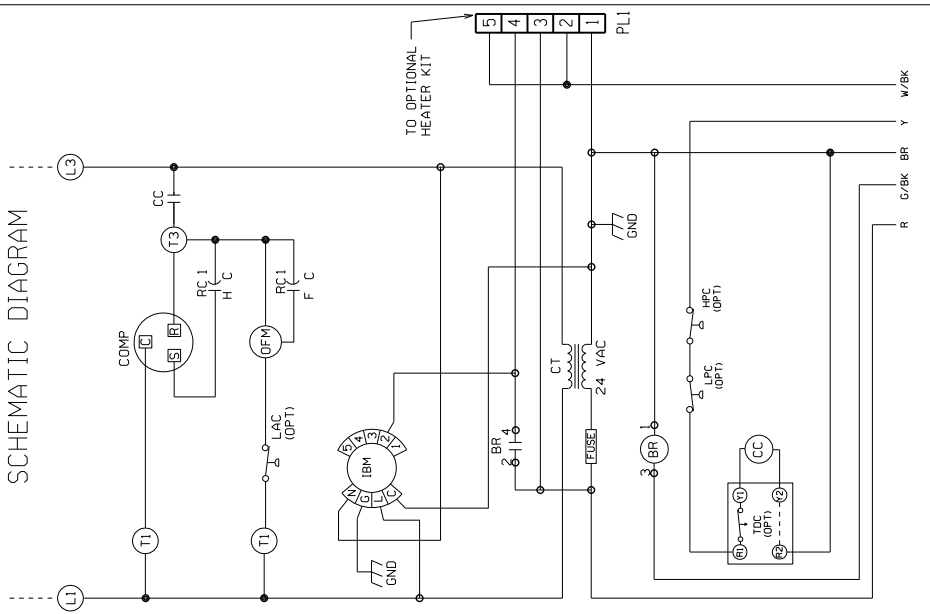

WIRE COLOR CODE

BK	BLACK
BR	BROWN
BL	BLUE
G	GREEN
GY	GRAY
W	WHITE
Y	YELLOW
O	ORANGE
PR	PURPLE
R	RED

ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER

1 PH, 208-230 VOLT - 60 HZ

DR. BY: JRJ APP. BY: JRJ DATE: 8-16-05 DWG. NO.: 90-23637-09 REV: 02

WIRING INFORMATION

- LINE VOLTAGE
- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- LOW VOLTAGE
- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED

REPLACEMENT WIRE

MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C-MIN.)

WARNING


CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRE FOR 230 VOLTS, USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRE FOR LOW SPEED, SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FIELD WIRING OR CONNECTION FROM HEATER KIT FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.

COMPONENT CODE

ALC	AUX. LIMIT CONTROL
BR	BLOWER RELAY
CC	COMPRESSOR CONTACTOR
CH	COMPRESSION HEATER
COMP	COMPRESSOR
CT	CONTROL TRANSFORMER
GND	GROUND
HPC	HIGH PRESSURE CONTROL
IBM	INDOOR BLOWER MOTOR
LAC	LOW AMBIENT COOLING CONTROL
OFM	OUTDOOR FAN MOTOR
OPT	OPTIONAL
PL	PLUG
PLUC	PLUG CAPACITOR
RC	RUN CAPACITOR
TR	TERMINAL BLOCK
TDC	TIME DELAY CONTROL
WIRE NUT	WIRE NUT

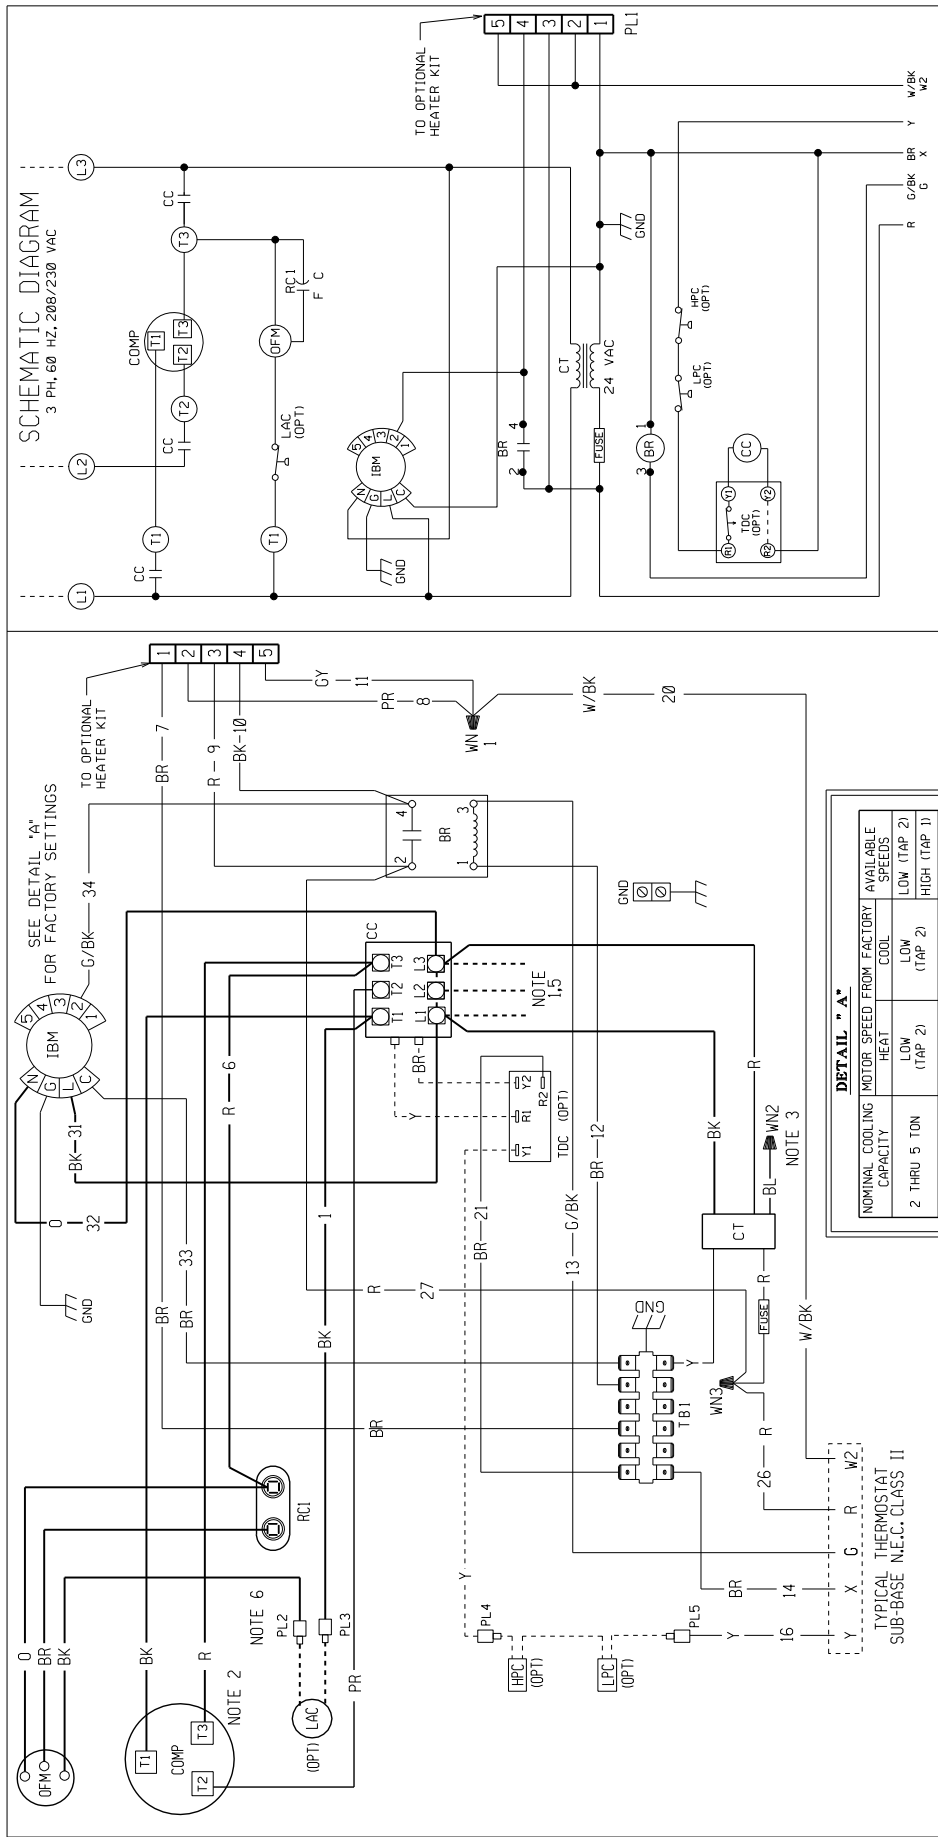

WIRING INFORMATION

LINE VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED
 LOW VOLTAGE
 -FACTORY STANDARD
 -FACTORY OPTION
 -FIELD INSTALLED
 REPLACEMENT WIRE
 -MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C.MIN.)
 -CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C., NATIONAL WIRING REGULATIONS, AND LOCAL CODES AS APPLICABLE.

WIRE COLOR CODE

BK---BLACK
 BR---BROWN
 BL---BLUE
 G---GREEN
 W---WHITE
 Y---GRAY
 O---ORANGE
 PR---PURPLE
 R---RED
 W---WHITE
 Y---YELLOW

COMPONENT CODE

ALC AUX. LIMIT CONTROL
 BR BLOWER RELAY
 CC COMPRESSOR CONTACTOR
 CH CRANKCASE HEATER
 COMP COMPRESSOR
 CT CONTROL TRANSFORMER
 GND GROUND
 HPC HIGH PRESSURE CONTROL
 IBM INDOOR BLOWER MOTOR

LAC LOW AMBIENT COOLING CONTROL
 OFM OUTDOOR FAN MOTOR
 OPT OPTIONAL
 PL PLUG
 RUN RUN CAPACITOR
 TB TERMINAL BLOCK
 TDC TIME DELAY CONTROL
 WIRE NUT

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRED FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRED FOR LOW SPEED. SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FIELD WIRING OR CONNECTION FROM HEATER KIT FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.



ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER

3 PH, 208-230 VOLT - 60 HZ

DR. BY: JRJ
 APP. BY: JRJ
 DATE: 8-18-05
 DWG. NO.: 90-23637-10
 REV: 02

SCHEMATIC DIAGRAM

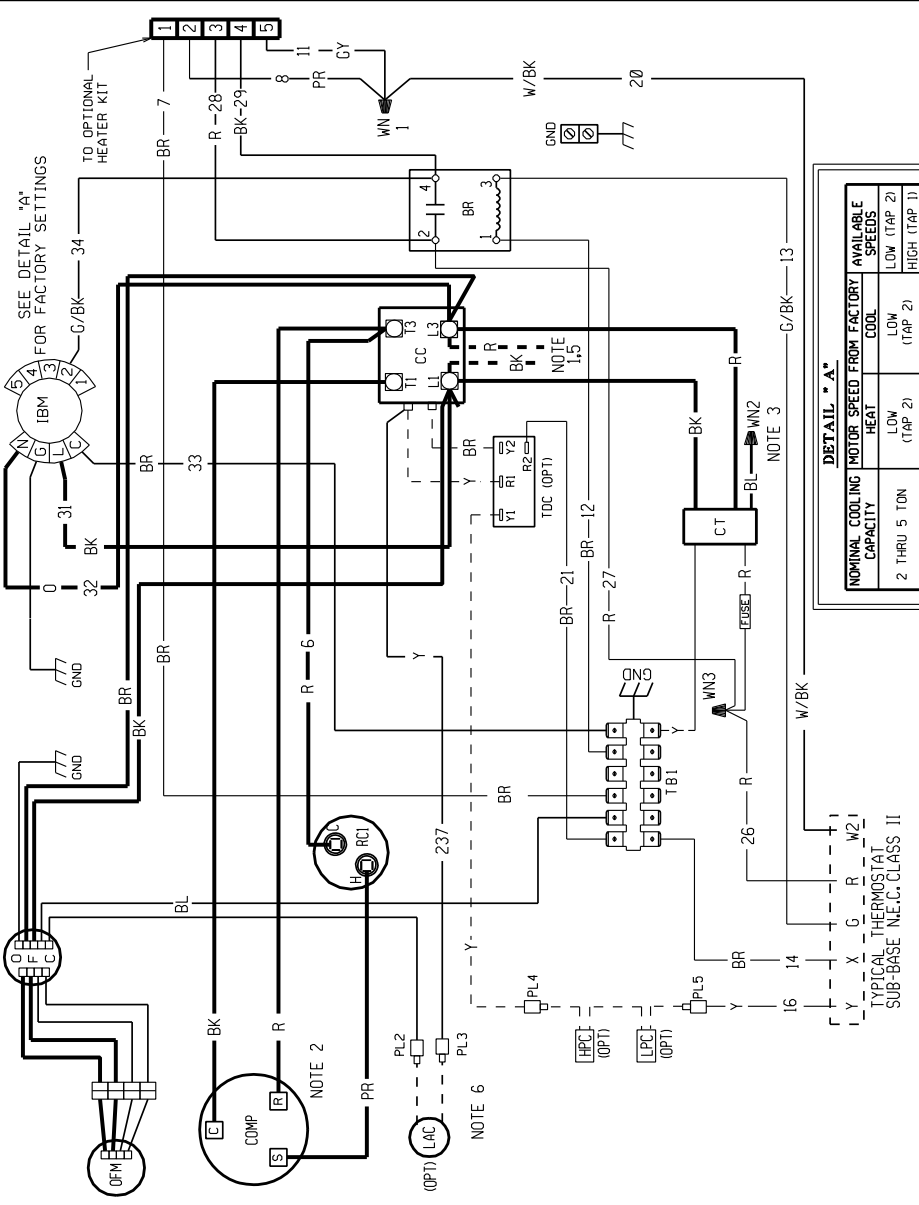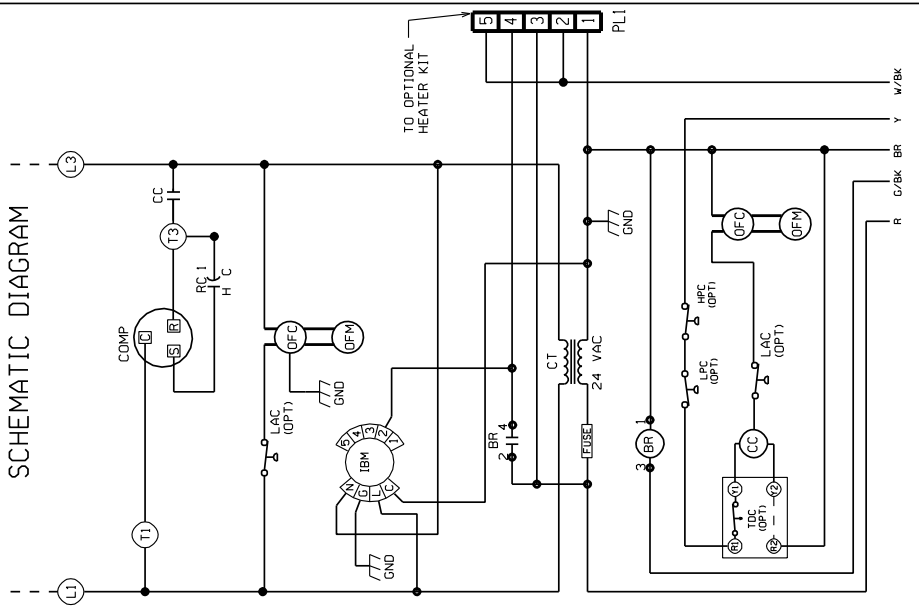

WIRE COLOR CODE

BK	BLACK	GY	GRAY	R	RED
BR	BROWN	O	ORANGE	W	WHITE
BL	BLUE	PK	PINK	Y	YELLOW
G	GREEN	PR	PURPLE	CL	CLEAR

ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER
 WITH INDOOR X-MOTOR AND OUTDOOR REMOTE CONTROL ECM
 1 PH, 208-230 VOLT - 60 HZ

DR. BY: JHB
 APP. BY: JHB
 DATE: 9-03-09
 DWG. NO.: 90-23637-17
 REV: 01

WIRING INFORMATION

- LINE VOLTAGE
- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- LOW VOLTAGE
- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED
- REPLACEMENT WIRE
- MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C° MIN.)
- WARNING
- CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., AND LOCAL CODES AS APPLICABLE.

NOTES:


- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRED FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRED FOR LOW SPEED. SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.

COMPONENT CODE

- ALC LOW AMBIENT CONTROL
- BR BLOWER RELAY
- COMP COMPRESSOR CONTACTOR
- CC CRANKCASE HEATER
- COMP COMPRESSOR
- CT CONTROL TRANSFORMER
- GND GROUND
- HPC HIGH PRESSURE CONTROL
- IBM INDOOR BLOWER MOTOR
- LAC LOW AMBIENT CONTROL
- OFM OUTDOOR FAN MOTOR
- OPT OPTIONAL
- PL PLUG
- RC RUN CAPACITOR
- RCB TERMINAL BLOCK
- TB TIME DELAY CONTROL
- WIRE NUT

DETAIL * A *

NOMINAL COOLING CAPACITY	MOTOR SPEED FROM FACTORY	AVAILABLE SPEEDS
2 THRU 5 TON	HEAT	LOW (TAP 2)
	COOL	LOW (TAP 2)
		HIGH (TAP 1)

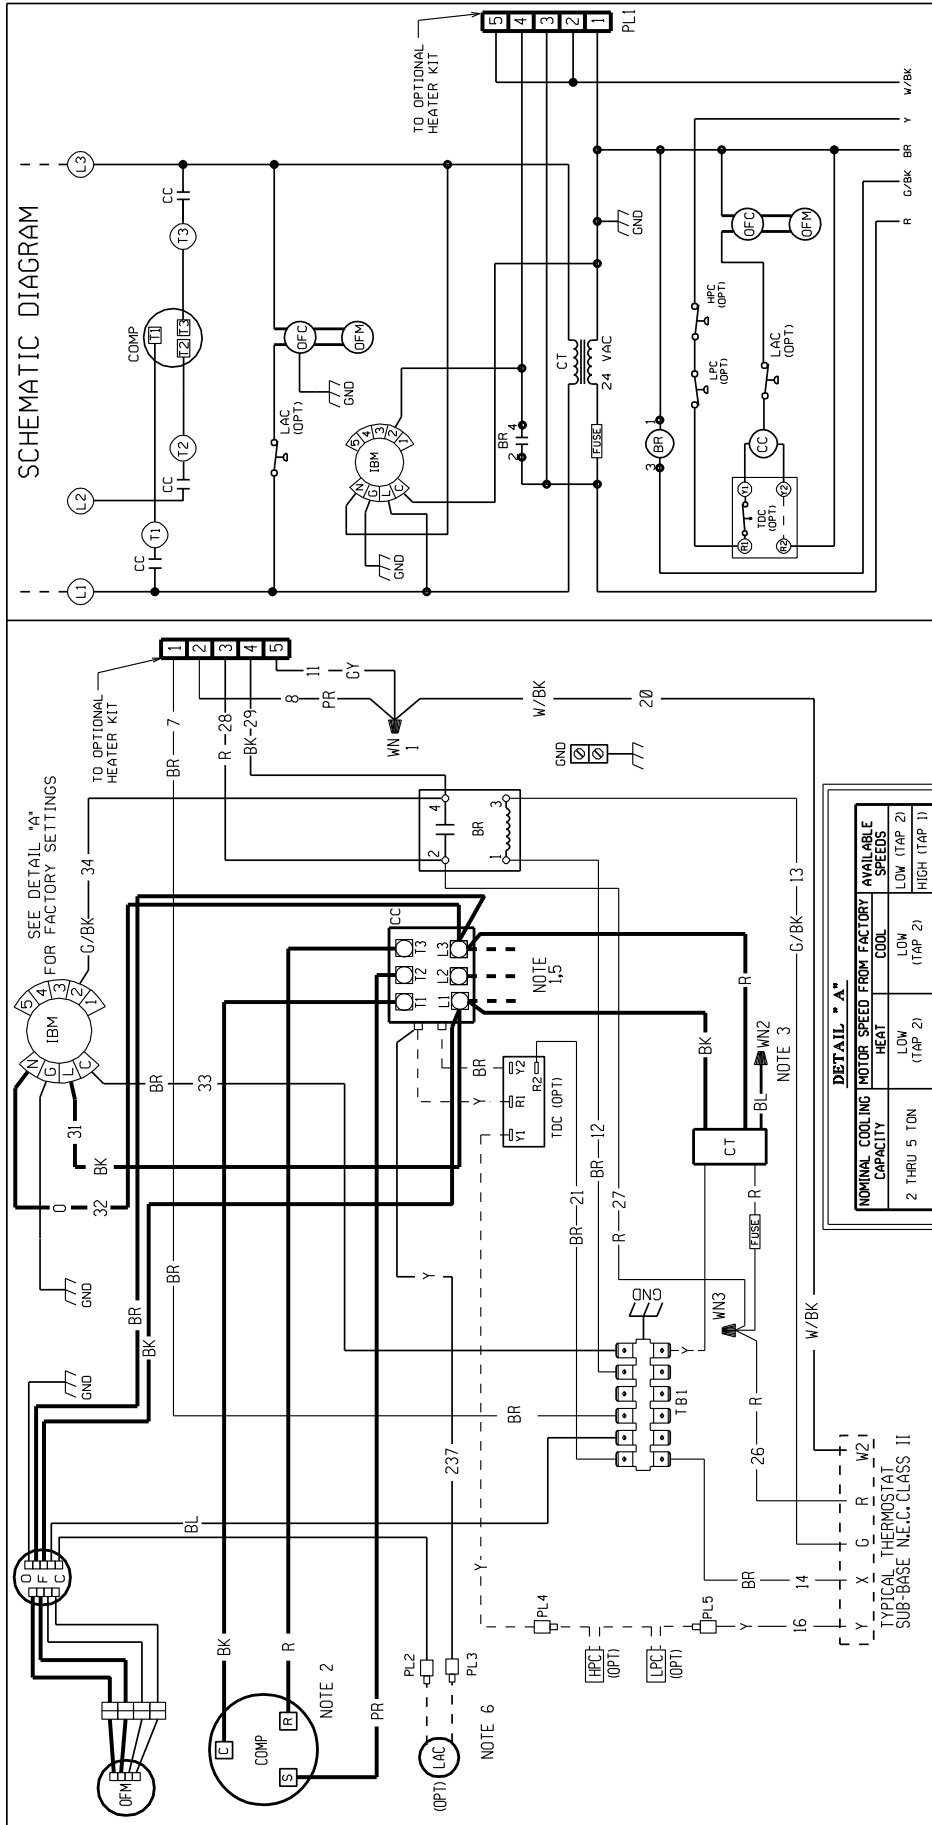

WIRE COLOR CODE

BK	BLACK	GY	GRAY	R	RED
BR	BROWN	O	ORANGE	W	WHITE
BL	BLUE	PK	PINK	Y	YELLOW
G	GREEN	PR	PURPLE	CL	CLEAR

ELECTRICAL WIRING DIAGRAM

PACKAGE AIR CONDITIONER

WITH INDOOR X-MOTOR AND OUTDOOR REMOTE CONTROL ECM

3 PH, 208-230 VOLT - 60 HZ

DR. BY: JHB APP. BY: DATE: 9-03-09 DWG. NO.: 90-23637-18 REV: 01

WIRING INFORMATION

LINE VOLTAGE

- FACTORY STANDARD
- FACTORY OPTION
- FACTORY INSTALLED

LOW VOLTAGE

- FACTORY STANDARD
- FACTORY OPTION
- FIELD INSTALLED

REPLACEMENT WIRE

- MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C MIN.)
- CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

NOTES:

- CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
- COMPRESSOR MOTOR THERMALLY PROTECTED.
- TRANSFORMER FACTORY WIRED FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
- MOTOR FACTORY WIRED FOR LOW SPEED. SEE AIRFLOW TABLES IN INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED FOR UNIT APPLICATION.
- FIELD WIRING OR CONNECTION FROM HEATER KIT FUSE BLOCK.
- PL2 & PL3 ARE CONNECTED WHEN LAC IS NOT PRESENT.

COMPONENT CODE

ALC	AUX. LIMIT CONTROL
BR	BLOWER RELAY
CC	COMPRESSOR CONTACTOR
CCCH	CRANKCASE HEATER
COMP	COMPRESSOR
CONTROL	CONTROL TRANSFORMER
GND	GROUND
HPC	HIGH PRESSURE CONTROL
IBM	INDOOR BLOWER MOTOR
LAC	LOW AMBIENT COOLING CONTROL
OUTDOOR FAN CONTROL	OUTDOOR FAN CONTROL
OPTIONAL	OPTIONAL
PL	PLUG
RC	RUN CAPACITOR
TERMINAL BLOCK	TERMINAL BLOCK
TIME DELAY CONTROL	TIME DELAY CONTROL
WIRE NUT	WIRE NUT

DETAIL "A"

NOMINAL COOLING CAPACITY	MOTOR SPEED FROM FACTORY	AVAILABLE SPEEDS
2 THRU 5 TON	HEAT	LOW (TAP 2)
	COOL	LOW (TAP 2)
		HIGH (TAP 1)

BEFORE PURCHASING THIS APPLIANCE, READ IMPORTANT ENERGY COST AND EFFICIENCY INFORMATION AVAILABLE FROM YOUR RETAILER.

GENERAL TERMS OF LIMITED WARRANTY*

Sure Comfort® will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Conditional Parts (Registration Required)

(1 Phase, Residential Applications).....Ten (10) Years

Compressor

(1 Phase, Residential Applications).....Ten (10) Years

(1 & 3 Phase, Commercial Applications).....Five (5) Years

Parts

(3 Phase, Commercial Applications).....One (1) Year



Sure Comfort®
P.O. Box 17010, Fort Smith, AR 72917

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.