



WRN Series

Indoor Remote Compressor Unit 3 Through 40 HP



Unit shown with optional control panel, oil control, liquid, & suction line assemblies.

The WRN series of indoor remote condensing units are designed to be compact, yet servicable. They offer a full selection of standard and optional features. Their narrow profile allows easy fit through doorways and the small footprint maximizes use of premium floor space. An optional stacking rack can further enhance floor space utilization on multiple unit installs.

Standard Features:

- Discus or Reed Semi-hermetic Compressor (Contact factory for Hermetic Compressors)
- Suction and discharge service valves (as requires)
- Compressor springs and discharge vibrasorber
- Dual pressure control
- Liquid receiver with isolation valves
- Compressor head cooling fan (as required)
- Pressure relief valve or fusible plug
- Contactor box
- Compressor contactor and control circuit fusing
- UL and C-UL listed

Optional Features:

- Large electrical control panel (as shown above)
- Crankcase heater
- Liquid line assembly (filter and vibration absorber)
- Suction line assembly (filter and vibration absorber)
- Suction Accumulator (mounted)
- Oil Separator (mounted)
- Air or Electric Defrost provisions (requires optional control panel)
- Pumpdown toggle switch
- Two tier stacking rack
- Oil failure control (as required)

WRN Series

BTUH Capacity @ 105°F Condensing Temperature

NOM. H.P.	REF. TYPE	MODEL NUMBER	BTUH CAPACITY AT SUCTION TEMPERATURE (°F)									
			40°	30°	25°	20°	10°	0°	-10°	-20°	-30°	-40°
3	404A	WRNS3M44	----	----	30000	26800	21000	16400	----	----	----	----
4	404A	WRNS4M44	----	----	41500	36700	28400	21400	----	----	----	----
5	404A	WRND5M44	77200	62600	56000	49800	39100	30200	23200	----	----	----
6	404A	WRND6M44	94000	76200	68300	61000	48300	37700	29200	----	----	----
7.5	404A	WRND7M44	107600	87600	78800	70700	56600	44800	34900	----	----	----
7.5	404A	WRND8M44	126100	102700	92400	82800	66100	52200	40700	----	----	----
10	404A	WRND10M44	148700	121600	109600	98700	79400	63000	49100	----	----	----
12	404A	WRND12M44	203800	166100	149450	134200	107400	85200	66900	----	----	----
15	404A	WRND15M44	204700	167200	150600	135400	108700	86300	67700	----	----	----
20	404A	WRND20M44	218200	179000	161000	144200	114100	88700	67100	----	----	----
25	404A	WRND25M44	272400	226300	204600	183800	146250	114900	91200	----	----	----
30	404A	WRND30M44	333550	273000	245800	220500	175400	137500	106150	----	----	----
35	404A	WRND35M44	422100	343600	309000	277300	221650	175200	136400	----	----	----
40	404A	WRND40M44	482800	398900	360900	325500	261950	208100	163350	----	----	----
3	404A	WRNS3L44	----	----	----	----	----	25100	18900	13500	9100	5700
3	404A	WRND3L44	----	----	----	----	----	32800	25300	19000	13900	9600
4	404A	WRND4L44	----	----	----	----	----	39200	30400	23100	17000	11900
5	404A	WRND5L44	----	----	----	----	----	44300	34700	26600	19900	14100
6	404A	WRND6L44	----	----	----	----	----	53100	41600	32000	24000	17400
7.5	404A	WRND8L44	----	----	----	----	----	62700	49100	37900	28600	20600
9	404A	WRND9L44	----	----	----	----	----	76900	60200	46300	34700	25200
10	404A	WRND10L44	----	----	----	----	----	85200	67500	52400	39500	28700
12	404A	WRND12L44	----	----	----	----	----	88700	69500	54000	40800	28200
15	404A	WRND15L44	----	----	----	----	----	114900	91100	71800	55200	39800
22	404A	WRND22L44	----	----	----	----	----	138000	110200	86400	65400	46300
27	404A	WRND27L44	----	----	----	----	----	175800	139400	107400	80000	57180
30	404A	WRND30L44	----	----	----	----	----	198200	155900	120300	90300	64860

NOTES: 1. Increase (decrease) capacity 3% for each 5°F lower (higher) condensing temperature.
2. When ordering a R-507 model, change the model number suffix from 44 to 57.

BTUH Capacity @ 105°F Condensing Temperature

WITT MODEL NUMBER	COMP. MODEL NUMBER	AMPS @ 230/1/60			AMPS @ 208-230/3/60			AMPS @ 460/3/60		
		COMPRESSOR		MIN. CIRC AMPACITY*	COMPRESSOR		MIN. CIRC AMPACITY*	COMPRESSOR		MIN. CIRC AMPACITY*
		RLA	LRA		RLA	LRA		RLA	LRA	
WRNS3M44	ERF-031E	----	----	----	12.4	82	17	5.8	41	15
WRNS4M44	NRB-040E	----	----	----	21.8	141	29	11.3	62.5	15
WRND5M44	2DD-R63KE	----	----	----	22.3	120	29	10.5	60	15
WRND6M44	2DL-R78KE	----	----	----	31.6	169	42	13.8	85	19
WRND7M44	2DA-R89KE	----	----	----	32.0	169	42	14.1	85	19
WRND8M44	3DA-R10ME	----	----	----	41.0	215	53	20.0	106	27
WRND10M44	3DB-R12ME	----	----	----	43.6	215	56	20.0	106	27
WRND12M44	3DF-R15ME	----	----	----	48.2	275	63	23.6	138	31
WRND15M44	3DS-R17ME	----	----	----	59.6	275	76	29.0	138	38
WRND20M44	4DA-R18ME	----	----	----	66.0	308	84	33.0	154	43
WRND25M44	4DH-R22ME	----	----	----	82.2	428	105	41.1	214	52
WRND30M44	4DJ-R28ME	----	----	----	94.0	470	120	45.0	235	58
WRND35M44	6DH-R35ME	----	----	----	107.0	565	136	55.0	260	70
WRND40M44	6DJ-R40ME	----	----	----	142.0	594	180	70.0	315	90
WRNS3L44	LAH-032E	16.7	105	24	12.8	112	18	6.2	56	15
WRND3L44	2DF-F16KE	----	----	----	16.8	102	23	8.1	52	15
WRND4L44	2DL-F20KE	----	----	----	26.3	161	35	10.2	60	15
WRND5L44	2DA-F23KE	----	----	----	28.8	161	38	10.2	60	15
WRND6L44	3DA-F28KE	----	----	----	26.5	150	36	12.0	77	17
WRND8L44	3DB-F33KE	----	----	----	31.5	161	42	16.1	83	22
WRND9L44	3DF-F40KE	----	----	----	39.0	215	51	16.9	106	23
WRND10L44	3DS-F46KE	----	----	----	42.0	215	55	18.6	106	25
WRND12L44	4DA-F47KE	----	----	----	45.6	220	59	22.8	110	30
WRND15L44	4DL-F63KE	----	----	----	52.6	278	68	26.3	139	35
WRND22L44	4DT-F76KE	----	----	----	66.0	374	85	33.0	187	43
WRND27L44	6DL-F93KE	----	----	----	80.8	450	103	41.6	218	51
WRND30L44	6DT-F11ME	----	----	----	95.6	470	122	42.8	235	55

* Minimum Circuit Ampacity shown is for the remote compressor and control circuit only, and does not include provisions for condenser fan, evaporator fan, or electric defrost loads should they be required. Consult the factory or the unit nameplate for more specific information.


BTUH Capacity @ 105°F Condensing Temperature

NOM. H.P.	REF. TYPE	Witt Model Number	Pumpdown Cap. @ 90% (lbs)	Dimensions (Inches)						Rec'r Inlet & Outlet	Suction	Disch	Liquid Line Kit	Suction Line Kit	Approx. Ship Wt. (lbs)
				† Approx. Overall			Mounting								
				L	W	H	A	B	C						
3	404A	WRNS3M44	28	34	29	26*	18.5	8.25	19.5	5/8	1-1/8	5/8	5/8	1-1/8	390
4	404A	WRNS4M44	28	34	29	28*	18.5	8.25	19.5	5/8	1-1/8	5/8	5/8	1-1/8	470
5	404A	WRND5M44	71	42	29	31*	33.5	4.25	19.5	5/8	1-3/8	7/8	5/8	1-3/8	470
6	404A	WRND6M44	71	42	29	31*	33.5	4.25	19.5	5/8	1-3/8	7/8	7/8	1-3/8	530
7.5	404A	WRND7M44	81	48	29	31*	39.5	4.25	19.5	7/8	1-3/8	7/8	7/8	1-3/8	530
7.5	404A	WRND8M44	81	48	29	31*	39.5	4.25	19.5	7/8	1-3/8	1-1/8	7/8	1-3/8	580
10	404A	WRND10M44	124	48	29	34	36.5	5.75	19.5	1-1/8	1-3/8	1-1/8	1-1/8	1-3/8	760
12	404A	WRND12M44	124	48	29	34	36.5	5.75	19.5	1-1/8	1-3/8	1-1/8	1-1/8	1-3/8	770
15	404A	WRND15M44	124	48	29	34	36.5	5.75	19.5	1-1/8	1-5/8	1-1/8	1-1/8	1-5/8	780
20	404A	WRND20M44	124	48	32	35	36.5	5.75	22.5	1-1/8	1-5/8	1-3/8	1-1/8	1-5/8	820
25	404A	WRND25M44	156	60	32	38	44.5	5.75	22.5	1-1/8	2-1/8	1-3/8	1-1/8	2-1/8	1035
30	404A	WRND30M44	266	72	32	38	50.5	11.5	22.5	1-3/8	2-1/8	1-3/8	1-3/8	2-1/8	1090
35	404A	WRND35M44	266	72	32	36	50.5	11.5	22.5	1-3/8	2-1/8	1-3/8	1-3/8	2-1/8	1235
40	404A	WRND40M44	266	72	32	38	50.5	11.5	22.5	1-3/8	2-1/8	1-5/8	1-3/8	2-1/8	1285
3	404A	WRNS3L44	28	34	29	35	18.5	8.25	19.5	5/8	1-1/8	5/8	5/8	1-1/8	370
3	404A	WRND3L44	28	34	29	39	18.5	8.25	19.5	5/8	1-3/8	7/8	5/8	1-3/8	390
4	404A	WRND4L44	28	34	29	39	18.5	8.25	19.5	5/8	1-3/8	7/8	5/8	1-3/8	450
5	404A	WRND5L44	28	34	29	39	18.5	8.25	19.5	5/8	1-3/8	7/8	5/8	1-3/8	470
6	404A	WRND6L44	28	34	29	39	18.5	8.25	19.5	5/8	1-3/8	1-1/8	5/8	1-3/8	500
7.5	404A	WRND8L44	71	42	29	38	33.5	4.25	19.5	5/8	1-3/8	1-1/8	5/8	1-3/8	590
9	404A	WRND9L44	71	42	29	38	33.5	4.25	19.5	5/8	1-3/8	1-1/8	5/8	1-3/8	620
10	404A	WRND10L44	71	42	29	38	33.5	4.25	19.5	5/8	1-3/8	1-1/8	5/8	1-3/8	790
12	404A	WRND12L44	81	48	32	36	39.5	4.25	19.5	7/8	1-5/8	1-1/8	7/8	1-5/8	800
15	404A	WRND15L44	81	48	32	36	39.5	4.25	22.5	7/8	1-5/8	1-3/8	7/8	1-5/8	820
22	404A	WRND22L44	124	48	32	38	36.5	5.75	22.5	1-1/8	1-5/8	1-3/8	1-1/8	1-5/8	1010
27	404A	WRND27L44	219	60	32	44	44.5	5.5	22.5	1-1/8	2-1/8	1-3/8	1-1/8	2-1/8	1235
30	404A	WRND30L44	219	60	32	46	44.5	5.5	22.5	1-1/8	2-1/8	1-3/8	1-1/8	2-1/8	1285

* Height is 32 inches with optional control panel.

† Overall dimensions are subject to change when "WRN" units are supplied with optional oil separator or suction accumulator.

Dimensional Data

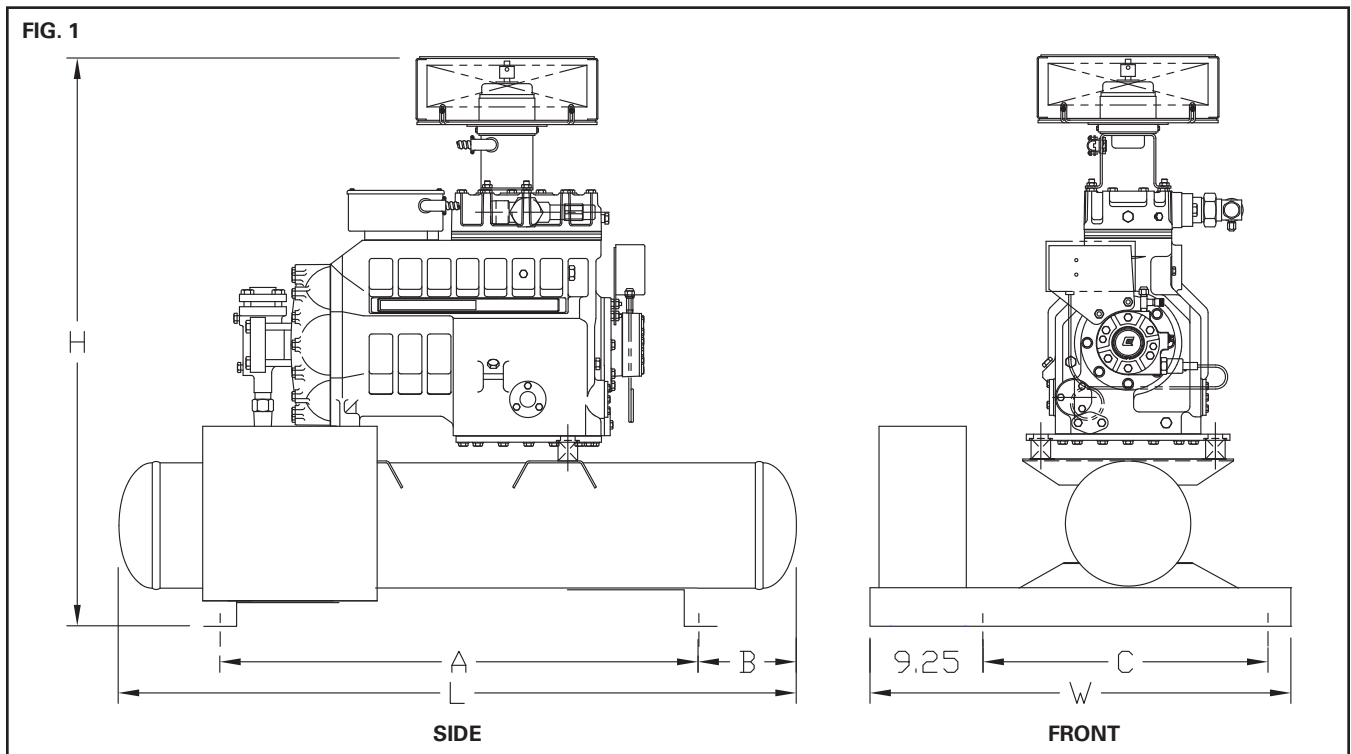

* All dimensions are in inches. All mounting holes are 3/8".



Witt

201 Thomas French Drive, Scottsboro, AL 35769 PHONE (256) 259-7400 FAX (256) 259-7478 witt.htpgusa.com