

Low Velocity Unit Cooler

Publication No. CZ-CWF-0312A

March 2012



Flow-Temp low air velocity unit coolers are ideally suited for meat cutting, holding and packing rooms as well as produce storage and florist boxes.

- There are nine models available, ranging in capacity from 5,000 to 34,000 Btuh @ 10° TD
- Rust free heavy gauge embossed Aluminum housing is standard. Optionally available with alternate materials and coatings.
- Seamless enhanced Copper tubes are staggered and mechanically expanded into corrugated Aluminum fins assuring maximum heat transfer.
- Optional Copper fins and fin coatings are available.
- Available voltages: 115/1/60, 208/230/1/60, 460/1/60, 100/1/50, 200-220/1/50 and 380/1/50.
- Fan motors and blades can be easily accessed by lowering the hinged drain pan.
- Standard motors are permanently lubricated with thermal overload protection.
- High efficiency EC motors are standard, PSC or shaded pole motors are optionally available.
- All models are available in air, electric and hot gas defrosts designs.
- Air defrost units are suitable for use in coolers down to 35°F.
- Electric, Hot Gas Re-Evap and Hot Gas Reverse Cycle models are designed for use in rooms down to 28°F.

Nomenclature

C	W	F	050	A	E	1	B	1	1	A	1	A
I	II	III	IV	V	VI	VII	VIII	IX	X	XI	XII	XIII

- | | |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>I. Brand Name
C – ColdZone</p> <p>II. Unit type
W – Walk In Unit Cooler</p> <p>III. Series
F – Low Air Velocity</p> <p>IV. Capacity or Degree of Capacity –
050, 075, 100, 130, 160, 190, 220, 270, 340</p> <p>V. Voltage Code
A – 115/1/60
D – 208-230/1/60
F – 460/1/60
L – 100/1/50
M – 200-220/1/50
P – 380/1/50
X – Other</p> <p>VI. Motor/Fan Type
E – (EC) Electronically Commutated
P – (PSC) Permanent Split Capacitor
S – (SP) Shaded Pole
X – Other</p> <p>VII. Length in Fans
1, 2, 3, 4, 5, 6</p> <p>VIII. Coil Density
B – 6 fpi
X – Other</p> | <p>IX. Coil Material and Coating Options
1 – Aluminum fins (Al)
2 – Copper fins (Cu)
3 – Al + AST coating
4 – Al + Blygold
5 – Al + Bronze Glow
6 – Al + Heresite
8 – Al + Russ-Proof
X – Other
NOTE: Coil coatings are not available for electric defrost models</p> <p>X. Housing Material Coatings
1 – Aluminum, Embossed
2 – Galvanized
3 – White Painted
6 – Stainless Steel 304
X – Other</p> <p>XI. Unit Design Configuration
A – Air Defrost
E – Electric Defrost
G – Hot Gas Reverse Cycle Defrost with drain pan loop
H – Hot Gas Re-Evaporative Defrost with drain pan loop
K – Hot Gas Reverse Cycle Defrost with 115V heater
L – Hot Gas Reverse Cycle Defrost with 208/230V heater
X – Other</p> <p>XII. Not Currently Used
1 – Standard</p> <p>XIII. Revision Code – Single Alphanumeric Character
A – Current Revision</p> |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Performance Data

60 Hz Capacity Data

Model	Fan Data			Capacity								Charge (Lbs) 404A	Suction Conn. OD (inches)	Unit Weight (lbs.)
	No	CFM	m ³ /hr	10°F TD	5.6°C TD	15°F TD	8.3°C TD	50-55°F DB 55% RH, 20° TD		10.0-12.8°C DB 55% RH, 11.1° TD				
				Btuh	Watts	Btuh	Watts	Total	Sensible	Total	Sensible			
				Btuh	Watts	Btuh	Watts	Btuh	Watts	Btuh	Watts			
CWF050	1	580	990	5,000	1,470	7,500	2,200	10,000	9,200	2,930	2,690	1.2	1 1/8	50
CWF075	2	850	1,440	7,500	2,200	11,250	3,300	15,000	13,800	4,390	4,040	2.3	1 1/8	75
CWF100	2	1,110	1,890	10,000	2,930	15,000	4,390	20,000	18,400	5,860	5,390	2.5	1 1/8	75
CWF130	3	1,750	2,970	13,000	3,810	19,500	5,710	26,000	23,920	7,610	7,000	3.4	1 1/8	100
CWF160	3	1,720	2,922	16,000	4,690	24,000	7,030	32,000	29,440	9,370	8,620	4.6	1 1/8	110
CWF190	4	2,330	3,960	19,000	5,560	28,500	8,350	38,000	34,960	11,130	10,240	4.6	1 1/8	120
CWF220	4	2,290	3,890	22,000	6,440	33,000	9,660	44,000	40,480	12,880	11,850	6.1	1 1/8	130
CWF270	5	2,840	4,830	27,000	7,910	40,500	11,860	54,000	49,680	15,810	15,810	7.0	1 1/8	150
CWF340	6	3,430	5,830	34,000	9,960	51,000	14,930	68,000	62,560	19,910	18,320	9.0	1 1/8	180


50 Hz Capacity Data*

Model	Fan Data			Capacity								Charge (Lbs) 404A	Suction Conn. OD (inches)	Unit Weight (lbs.)
	No	CFM	m ³ /hr	10°F TD	5.6°C TD	15°F TD	8.3°C TD	50-55°F DB 55% RH, 20° TD		10.0-12.8°C DB 55% RH, 11.1° TD				
				Btuh	Watts	Btuh	Watts	Total	Sensible	Total	Sensible			
				Btuh	Watts	Btuh	Watts	Btuh	Watts	Btuh	Watts			
CWF050	1	480	820	4,600	1,350	6,900	2,000	9,200	8,460	2,700	2,480	1.2	1 1/8	50
CWF075	2	710	1,200	6,900	2,020	10,350	3,040	13,800	12,700	4,040	3,720	2.3	1 1/8	75
CWF100	2	920	1,570	9,200	2,700	13,800	4,040	18,400	16,930	5,390	4,960	2.5	1 1/8	75
CWF130	3	1,460	2,470	12,000	3,510	17,900	5,250	23,900	22,010	7,000	6,440	3.4	1 1/8	100
CWF160	3	1,430	2,430	14,700	4,320	22,100	6,470	29,400	27,090	8,620	7,930	4.6	1 1/8	110
CWF190	4	1,930	3,290	17,000	5,120	26,200	7,680	35,000	32,160	10,240	9,420	4.6	1 1/8	120
CWF220	4	1,900	3,230	20,000	5,930	30,400	8,890	40,500	37,240	11,850	10,900	6.1	1 1/8	130
CWF270	5	2,360	4,010	25,000	7,280	37,300	10,910	49,700	45,710	14,550	14,550	7.0	1 1/8	150
CWF340	6	2,850	4,840	31,000	9,160	46,900	13,740	62,600	57,560	18,320	16,850	9.0	1 1/8	180

*Use 60 Hz capacity and airflow values for units with EC motors

Dimensional Data

*All dimensions are in inches.

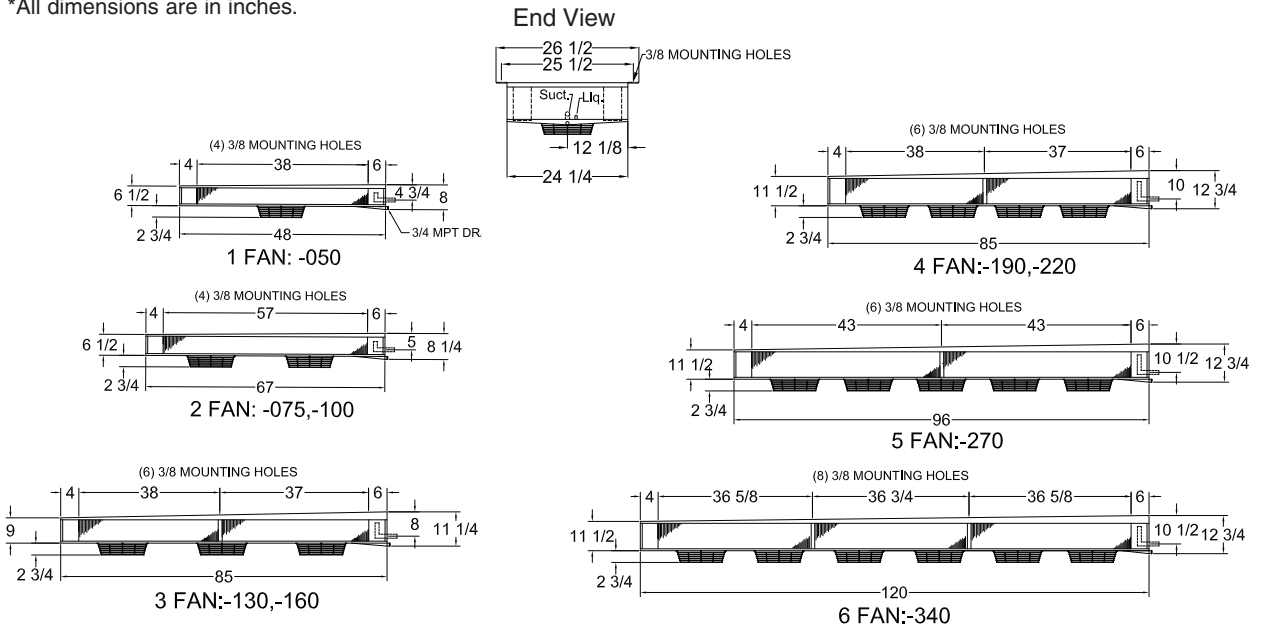

Other Connections

Liquid - 1/2" OD	Hot Gas 1/2" OD	Drain 3/4" MPT	Ext. Equalizer 1/4" OD
------------------	-----------------	----------------	------------------------

Electrical Data

Models 60HZ	Number of Fans	EC Motors				PSC Motors						SP Motors			
		115/1/60		208-230/1/60		115/1/60		208-230/1/60		460/1/60		115/1/60		208-230/1/60	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
CWF050	1	0.6	35	0.3	35	0.4	50	0.3	50	0.2	50	1.2	75	0.5	75
CWF075	2	1.2	70	0.6	70	0.8	100	0.6	100	0.3	100	2.4	150	1.0	150
CWF100	2	1.2	70	0.6	70	0.8	100	0.6	100	0.3	100	2.4	150	1.0	150
CWF130	3	1.8	105	0.9	105	1.2	150	0.9	150	0.5	150	3.6	225	1.5	225
CWF160	3	1.8	105	0.9	105	1.2	150	0.9	150	0.5	150	3.6	225	1.5	225
CWF190	4	2.4	140	1.2	140	1.6	200	1.2	200	0.6	200	4.8	300	2.0	300
CWF220	4	2.4	140	1.2	140	1.6	200	1.2	200	0.6	200	4.8	300	2.0	300
CWF270	5	3.0	175	1.5	175	2.0	250	1.5	250	0.8	250	6.0	375	2.5	375
CWF340	6	3.6	210	1.8	210	2.4	300	1.8	300	0.9	300	7.2	375	3.0	375

Models 50HZ	Number of Fans	EC Motors				PSC Motors						SP Motors			
		100/1/50		200-220/1/50		100/1/50		200-220/1/50		380/1/50		100/1/50		200-220/1/50	
		Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts
CWF050	1	0.6	35	0.3	35	0.4	45	0.3	45	0.2	45	1.1	70	0.5	70
CWF075	2	1.2	70	0.6	70	0.7	90	0.5	90	0.3	90	2.2	135	0.9	135
CWF100	2	1.2	70	0.6	70	0.7	90	0.5	90	0.3	90	2.2	135	0.9	135
CWF130	3	1.8	105	0.9	105	1.1	135	0.8	135	0.5	135	3.2	205	1.4	205
CWF160	3	1.8	105	0.9	105	1.1	135	0.8	135	0.5	135	3.2	205	1.4	205
CWF190	4	2.4	140	1.2	140	1.4	180	1.1	180	0.5	180	4.3	270	1.8	270
CWF220	4	2.4	140	1.2	140	1.4	180	1.1	180	0.5	180	4.3	270	1.8	270
CWF270	5	3.0	175	1.5	175	1.8	225	1.4	225	0.7	225	5.4	340	2.3	340
CWF340	6	3.6	210	1.8	210	2.2	270	1.6	270	0.8	270	6.5	340	2.7	340

Models	Defrost Heaters								Optional Drain Pan Heater for Hot Gas				Re-Evap HEA 10°F TD	Re-Evap HEA 15°F TD
	230/1/60		460/1/60		220/1/50		380/1/50		115/1/60		208-230/1/60			
	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts	Amps	Watts		
CWF050	4.3	1,000	2.2	1,000	4.2	915	1.8	680	2.2	250	2.0	225	HEA 1A	HEA 2A
CWF075	4.3	1,000	2.2	1,000	4.2	915	1.8	680	2.2	250	2.0	225	HEA 2A	HEA 2A
CWF100	4.3	1,000	2.2	1,000	4.2	915	1.8	680	2.2	250	2.0	225	HEA 2A	HEA 3A
CWF130	10.4	2,400	5.2	2,400	10.0	2,200	4.3	1,640	5.2	600	4.7	540	HEA 3A	HEA 3A
CWF160	10.4	2,400	5.2	2,400	10.0	2,200	4.3	1,640	5.2	600	4.7	540	HEA 3A	HEA 3A
CWF190	10.4	2,400	5.2	2,400	10.0	2,200	4.3	1,640	5.2	600	4.7	540	HEA 3A	HEA 4A
CWF220	10.4	2,400	5.2	2,400	10.0	2,200	4.3	1,640	5.2	600	4.7	540	HEA 3A	HEA 4A
CWF270	17.4	4,000	8.7	4,000	16.6	3,660	6.5	2,460	8.7	1,000	7.8	900	HEA 4A	HEA 5A
CWF340	21.7	5,000	10.9	5,000	20.8	4,570	8.1	3,070	10.9	1,250	7.8	900	HEA 4A	HEA 5A

Note: HEA = Heat Exchanger / Accumulator for Hot Gas Re-Evap systems only. Shipped loose for field installation.

Due to ongoing product development, specifications are subject to change without notice.



Visit us on the web at: <http://coldzone.htpgusa.com>

201 Thomas French Dr, Scottsboro, AL 35769 • Tel (714)529-4461 • Fax (714)529-8503