



Mullion-Temp

REACH-IN UNIT COOLER



The Mullion-Temp is designed to fit behind the mullion located between under counter or reach-in doors.

Features:

Mullion-Temp models are available for two airflow patterns.

- "MDF" models supply a downward flow of air, ideal for beverage coolers.
- "MUF" models provide upward air flow, directing cold air towards drop in food trays.

All Mullion-Temp units are available with our specially formulated epoxy coil coating to provide superior corrosion resistance for the coil surface.




ColdZone
8101 E. Kaiser Blvd. Suite 110
Anaheim CA. 92808
PH. 800-722-2653 • <http://coldzone.htpgusa.com>

REACH-IN UNIT COOLER

Product Data

MODEL NUMBER MDF/MUF	CAPACITY (Btu/hr)			CFM	MOTOR			CONNECTIONS (in.)			DIMENSIONS (IN)			APPRX SHIP WT. (LBS)
	10°F TD	15°F TD	20°F TD		QTY	AMPS 115V	AMPS 230/1	LIQUID	SUCTION	DRAIN	H	W	A	
27-13	1300	1950	2600	200	2	1.5	.8	1/2 F.N.	1/2 OD	5/8 OD	17-1/8	15-1/8	12-1/4	20
27-17	1700	2550	3400	185	2	1.5	.8	1/2 F.N.	1/2 OD	5/8 OD	17-1/8	15-5/8	12-1/4	22
37-23	2300	3450	4600	280	3	2.2	1.1	1/2 F.N.	1/2 OD	5/8 OD	17-1/8	22	12-1/4	30

* All dimensions are in inches.

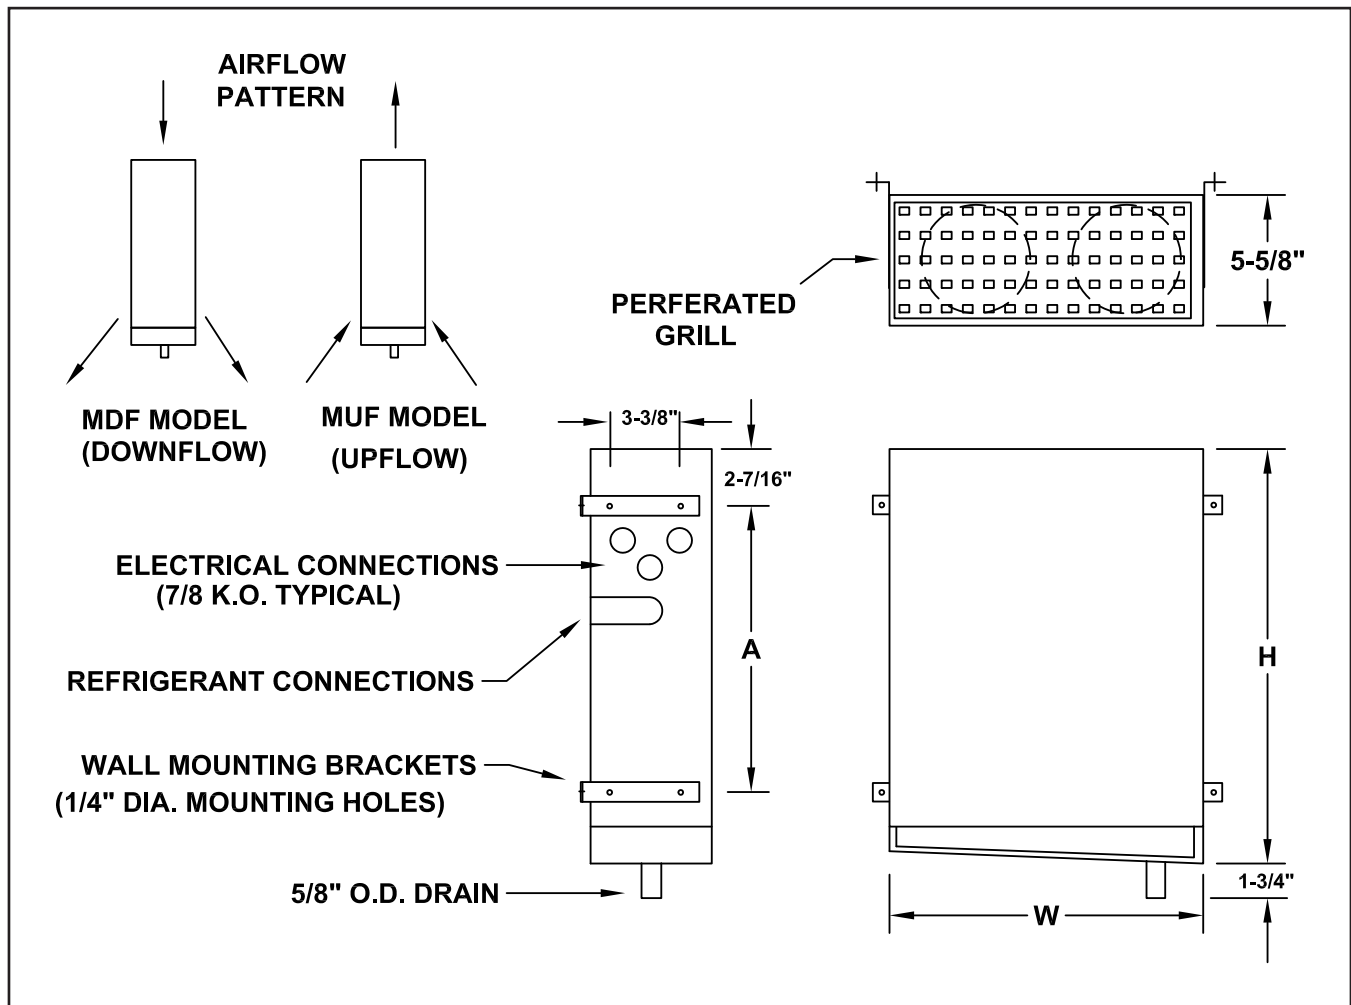

Due to continuing product development, specifications are subject to change without notice.