




Twin-Temp
**REACH-IN
UNIT COOLER**

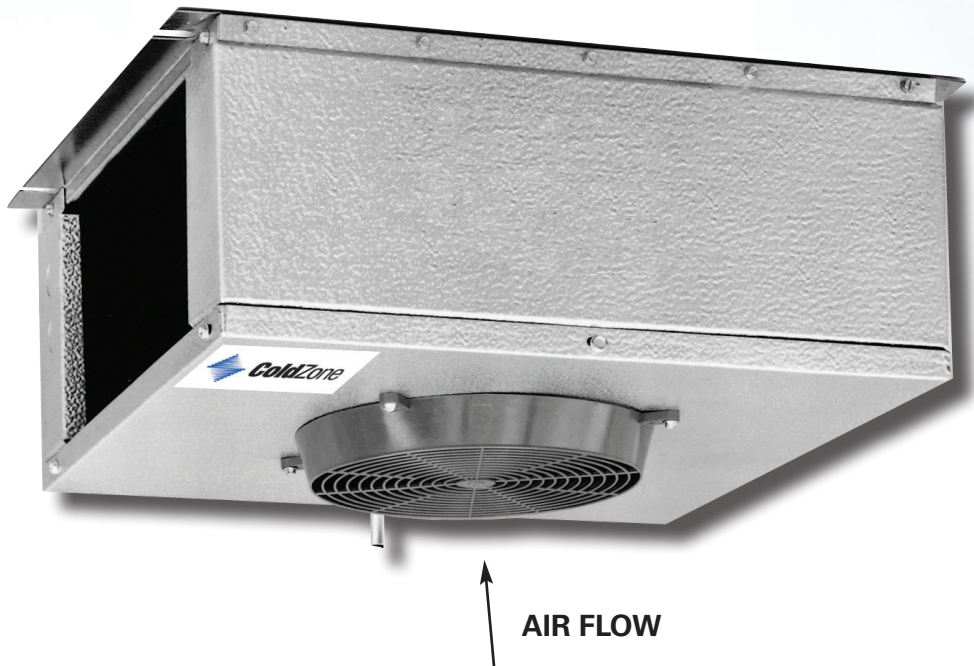

The Twin-Temp 2-way Unit Cooler is ideal for reach-in and walk-in applications above 34°F where efficient two-way air discharge is required.

These units are designed for easy installation, low maintenance and long life, especially when our uniquely formulated epoxy coating is applied to the coil.



ColdZone
8101 E. Kaiser Blvd. Suite 110
Anaheim CA. 92808
PH. 800-722-2653 • <http://coldzone.htpgusa.com>


REACH-IN UNIT COOLER

Specifications

MODEL NUMBER	FIG.	CAPACITY (BTU/HR)		FAN DATA		MOTOR DATA		DIMENSIONS (In)						CONNECTION SIZE (In)			SHIP WT. (lbs)
				CFM	DIAM. (In)	HP	AMPS @ 115V	A	B	C	D	E	F	SUCTION	INLET	DRAIN	
		10°TD	15°TD														
TW 17-9	1	900	1,350	150	8	9 W	.6	18-1/2	16-1/2	7-5/8	5-7/8	12-1/2	19	1/2 MF	1/2 FN	1/2 OD	17
TW 17-12	1	1,200	1,800	190	88	9 W	.6	18-1/2	16-1/2	7-5/8	5-7/8	12-1/2	19	1/2 MF	1/2 FN	1/2 OD	19
TW 17-18	1	1,800	2,700	260	10	9 W	.6	18-1/2	16-1/2	9-1/8	7-3/8	12-1/2	19	1/2 MF	1/2 FN	1/2 OD	23
TW 17-25	1	2,500	3,750	350	10	9 W	.6	20-1/2	18-1/2	9-5/8	7-3/8	15	21	1/2 MF	1/2 FN	1/2 OD	26
TW 17-35	1	3,500	5,250	440	12	9 W	.6	20-1/2	18-1/2	11-1/4	9	15	21	1/2 MF	1/2 FN	1/2 OD	28
TW 17-45	1	4,500	6,750	530	12	1/20	1.7	30-1/2	21-1/4	10	7-3/4	17	32	5/8 OD	1/2 OD	1/2 FPT	44
TW 17-55	1	5,500	8,250	650	12	1/20	1.7	30-1/2	21-1/4	12	9-3/4	17	32	5/8 OD	1/2 OD	1/2 FPT	50
TW 18-65	1	6,500	9,750	820	12	1/20	1.7	30-1/2	21-1/4	12	9-3/4	17	32	5/8 OD	1/2 OD	1/2 FPT	55
TW 17-75	2	7,500	11,250	960	16	1/12	3.5	35-1/4	36-1/4	11	7-3/4	31	36-1/2	5/8 OD	1/2 OD	1/2 FPT	109
TW 18-85	2	8,500	12,750	1100	16	1/12	3.5	35-1/4	36-1/4	11	7-3/4	31	36-1/2	5/8 OD	1/2 OD	1/2 FPT	115
TW 17-105	2	10,500	15,750	1350	16	1/12	3.5	35-1/4	36-1/4	13	9-3/4	31	36-1/2	7/8 OD	5/8 OD	1/2 FPT	121
TW 18-120	2	12,000	18,000	1540	16	1/12	3.5	35-1/4	36-1/4	13	9-3/4	31	36-1/2	7/8 OD	5/8 OD	1/2 FPT	128

* All dimensions are in inches.

- (1) Externally equilized expansion valves must be used on models TW 17-105 and TW 17-120.
- (2) 230V motor amps = 115V amps x 0.5

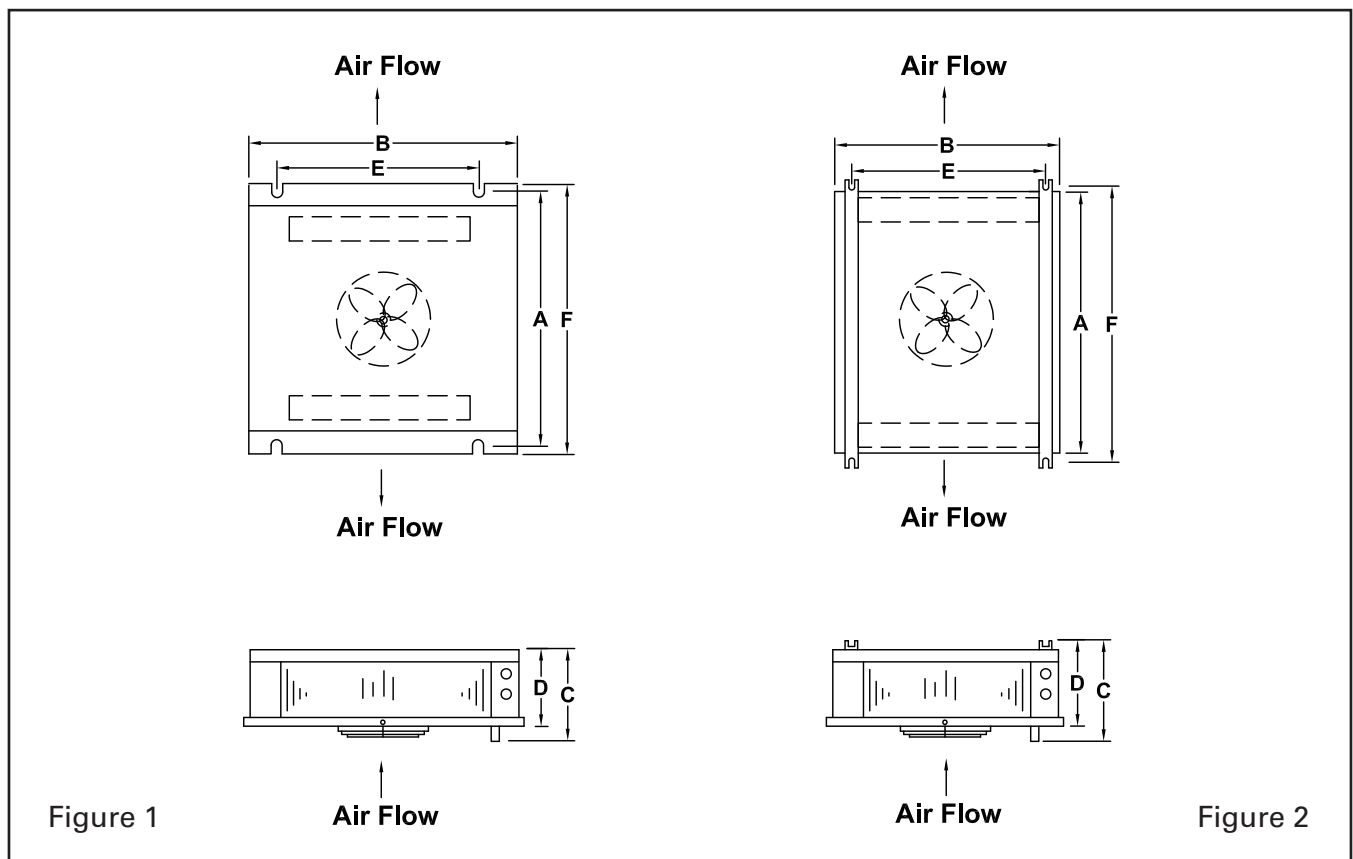

Due to continuing product development, specifications are subject to change without notice.