



The new degree of comfort.®



Commercial Electric
Light-Duty Water Heaters

Light-Duty Commercial Electric Water Heaters

With easy field-level conversion for multiple light duty applications

Flexible design for a variety of light duty applications

- 30 - 119.9-Gallon models
- 208/240/277/480 Voltages available on all models
- 3 kW - 12.1 kW Available on 30 - 50-gallon models
- 66, 80 and 119.9-Gallon models only available in 12.1 kW
- Available in short models
- Factory shipped in simultaneous configuration

FEATURES & BENEFITS	
Terminal Block	Easy to convert standard models from simultaneous to non-simultaneous, single phase to three phase
	Field convertible to meet any light-duty application need
	Available on 30 - 119.9-gallon models
Energy Efficient Design	Reduces energy consumption & standby heat loss with 2-1/2" of rigid polyurethane foam insulation
Designed for Long Life & Top Performance	Proprietary protective steel formulation with a unique coat of high temperature porcelain enamel
	Design maximizes corrosion resistance & life of anode rod
	Patented corrosion-resistant elements include double layer of magnesium oxide and copper to resist corrosion
	Durable factory-installed full flow brass drain valve
	Low lead compliant
Automatic Temperature Control	Automatic Temperature Control - Surface mounted thermostat automatically cycles on and off to maintain desired water temperature
	170°F Maximum temperature setting
Warranty	3-year limited tank, upgradable to 5-years and a 1-year limited parts warranty*

*See Commercial Warranty Certificate for complete information.

Electric Light Duty models are available with terminal block in both fused and non-fused configurations. All water heaters with power requirements over 48 Amps come Standard in the fused configuration.



Rheem Light-Duty
66 to 119.9-Gallon Capacities
208/240/277/480 Voltages
3kW - 12.1 kW
Electric



Consult factory for certification listing.

Safety and Construction | These products are design certified by Underwriters Laboratories (UL) to meet UL safety standards as electric storage tank water heaters. All models are North Carolina and Massachusetts Code compliant.
Certified for 150 PSI maximum working pressure.

See specifications chart on back.




INTEGRATED AIR & WATER



The new degree of comfort.

DIMENSIONAL INFORMATION (All dimensions shown in English and Metric)													FIRST HOUR DEL. G.P.H.	UNIFORM ENERGY FACTOR (UEF)
MODEL NUMBER	MIN. WATTS	MAX. WATTS	TANK CAPACITY (LISTED)		TANK CAPACITY (MEASURED)		A		B		APPROX. SHIPPING WT.			
			GAL.	LTR	GAL.	LTR	INCHES	MM	INCHES	MM	lbs.	kgs.		
ELD30-TB	3,000	12,000	30	114	27	102	47-1/2	1207	19	483	125	57	46	0.92
ELD40-TB	3,000	12,000	40	151	36	136	48-1/4	1226	20-1/4	514	140	64	55	0.93
ELD52-TB	3,000	12,000	50	189	45	170	58-5/8	1489	20-1/4	514	155	70	63	0.93
ELD66-TB	12,100	12,100	65	246	58.5	221	59-3/8	1508	22-1/4	565	185	84	N/A	N/A
ELD80-TB	12,100	12,100	80	303	72	273	59-5/8	1514	23-3/4	603	220	100	N/A	N/A
ELD120-TB	12,100	12,100	119.9	454	108	409	62-7/8	1597	28-1/4	718	335	152	N/A	N/A
ELDS30-TB	3,000	12,000	28	106	25	95	30	762	23	584	130	59	43	0.92
ELDS40-TB	3,000	12,000	36	136	33	125	31-1/2	800	24-1/4	616	150	68	46	0.92
ELDS52-TB	3,000	12,000	47	178	43	163	32	813	26-1/4	667	180	82	57	0.93

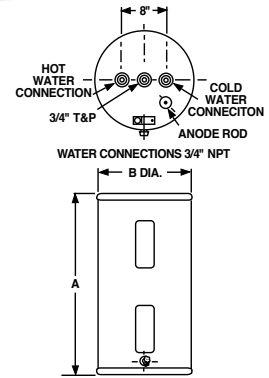

PRODUCT AVAILABILITY		Electric Light Duty models are available with terminal block in both fused and non-fused configurations. Fused configuration is Standard in all water heaters with power requirements over 48 Amps.																				
SIM OR NON-SIM	SIZE	208V					240V					277V					480V					
		3/3	4/4	4.5/4.5	5/5	6/6	3/3	4/4	4.5/4.5	5/5	6/6	3/3	4/4	4.5/4.5	5/5	6/6	3/3	4/4	4.5/4.5	5/5	6/6	
	30	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	40	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
	66					✓					✓					✓					✓	
	80					✓					✓					✓					✓	
	120					✓					✓					✓					✓	

- Fused or Non-Fused, Fused if > 48 Amps • Terminal Block allows for conversions from Simultaneous element usage to non-Simultaneous for maximum energy savings.
- ELD-C Models 66/80/120 still available without terminal block. • All models are factory shipped with sim configuration.

ELECTRICAL CHARACTERISTICS																	
ELEMENT WATTAGE	ELEMENT WATTAGE	NON-SIMULTANEOUS WIRING								SIMULTANEOUS WIRING							
		SINGLE/THREE PHASE OPERATION FULL LOAD CURRENT IN AMPERES				2-WIRE SINGLE PHASE OPERATION FULL LOAD CURRENT IN AMPERES				4-WIRE THREE PHASE OPERATION FULL LOAD CURRENT IN AMPERES				4-WIRE SINGLE PHASE OPERATION FULL LOAD CURRENT IN AMPERES (DOUBLE BRANCH CIRCUIT)			
UPPER	LOWER	TERMINALS L1 AND L2 FOR SINGLE PHASE, L1, L2, AND T2 FOR 3 PHASE				TERMINALS L1 AND L2				THERE'S NO 4 WIRE 3 PHASE THIS IS 3 PHASE SIM TERMINALS L1, L2, AND T2				TERMINALS L1 AND L2 FIRST CIRCUIT TERMINALS T1 AND T2 SECOND CIRCUIT			
		208	240	277	480	208	240	277	480	208	240	480	208	240	277	480	
3000	3000	14	13	11	6	29	25	22	13	25	22	11					
4000	4000	19	17	14	8	38	33	29	17	33	29	14					
4500	4500	22	19	16	9	43	38	32	19	37	32	16					
5000	5000	24	21	18	10	48	42	36	21	42	36	18					
6000	6000	29	25	22	13	58	50	43	25	50	43	22					
6050	6050	29	25	22	13	58	50	44	25	50	44	22					

SAME AS NON SIM, BUT THERE WILL BE TWO SETS OF INCOMING POWER. THIS IS THE FACTORY WIRING

RECOVERY CAPACITIES (Recovery in U.S. Gallons/Hr. (GPH) and Liters/Hr. (LPH) at various temperature rises)																				
ELEMENT WATTAGE UPPER/LOWER	NON-SIMULTANEOUS WIRING										SIMULTANEOUS WIRING									
	40°F / (22°C)		60°F / (33°C)		80°F / (45°C)		100°F / (56°C)		120°F / (67°C)		40°F / (22°C)		60°F / (33°C)		80°F / (45°C)		100°F / (56°C)		120°F / (67°C)	
	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH	GPH	LPH
3000/3000	30	115	20	77	15	58	12	46	10	38	61	230	41	153	30	115	24	92	20	77
4000/4000	41	153	27	102	20	77	16	61	14	51	81	307	54	205	41	153	32	123	27	102
4500/4500	46	173	30	115	23	86	18	69	15	58	91	345	61	230	46	173	36	138	30	115
5000/5000	51	192	34	128	25	96	20	77	17	64	101	384	68	256	51	192	41	153	34	128
6000/6000	61	230	41	153	30	115	24	92	20	77	122	460	81	307	61	230	49	184	41	153
6050/6050	61	230	41	153	30	115	24	92	20	77	122	460	81	307	61	230	49	184	41	153

Consult factory for certification requirements.

Recommended Specifications (for trade reference only)

Water heater(s) shall be model _____, manufactured by Rheem, having electrical input of _____ kW and a recovery rate of _____ GPH at a 100°F temperature rise. Water heater(s) shall have a storage capacity of _____ gallons. Water heater(s) shall have the UL seal of certification and be factory equipped with a CSA/ ASME rated temperature and pressure relief valve. Tank(s) interior shall be coated with a high temperature porcelain enamel and furnished with

a magnesium anode rod rigidly supported. Water heater(s) shall meet or exceed the energy factor requirements of ASHRAE. Tanks shall have a working pressure rating of 150 psi, and shall be completely assembled. Water heater(s) shall be equipped with copper, resistered, "screw-in" type elements. Tank shall be insulated with 2-1/2" of rigid polyurethane foam insulation. Water heater(s) shall be equipped with surface mounted thermostats each with an integral, manual reset, high limit control. Water heater(s) shall be covered by a three year limited warranty against tank leaks.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100 Roswell, Georgia 30076 • www.rheem.com